


Backstop® NT - Smooth on DensGlass Gold® *Dried Appearance*

3/4" Nap Rolled

800 ft²/pail application rate

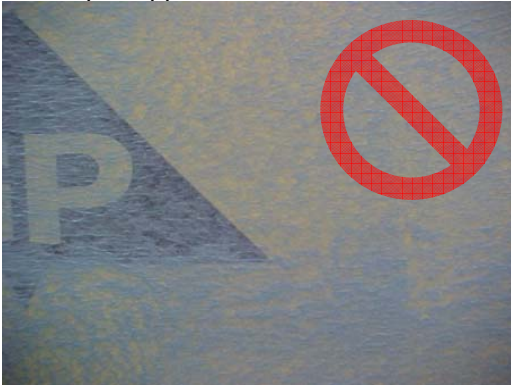

3/4" Nap Rolled

400 ft²/pail application rate



Note: When Backstop NT - Smooth is applied at the correct rate of **400** ft²/pail (yielding a dry film thickness of ~12 mils), the yellowness from the DensGlass Gold does not show through as much as the higher application rate of **800** ft²/pail.

Refer to Product Data Sheets for Complete Mixing and Application Instructions