



COVERAGE DATA PER MODULAR MOSAIC	
PER SQUARE FOOT	6.75 MODULAR BRICKS
PER MOSAIC	12 MODULAR BRICKS (1.78 FT ²)
PER BUNDLE	96 MODULAR BRICKS OR 8 MODULAR MOSAICS (14.22 FT ²)

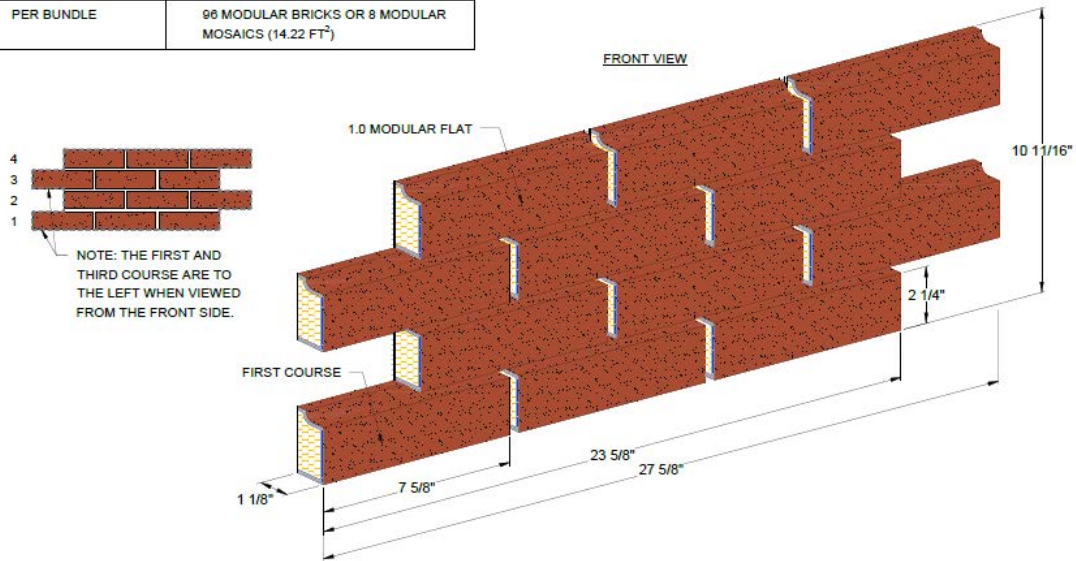

COVERAGE DATA PER MODULAR MOSAIC SOLDIER	
PER SQUARE FOOT	6.75 MODULAR BRICKS
PER MOSAIC SOLDIER	9 MODULAR BRICKS (1.34 FT ²)
PER BUNDLE	72 MODULAR BRICKS OR 8 MODULAR MOSAIC SOLDIERS (10.67 FT ²)

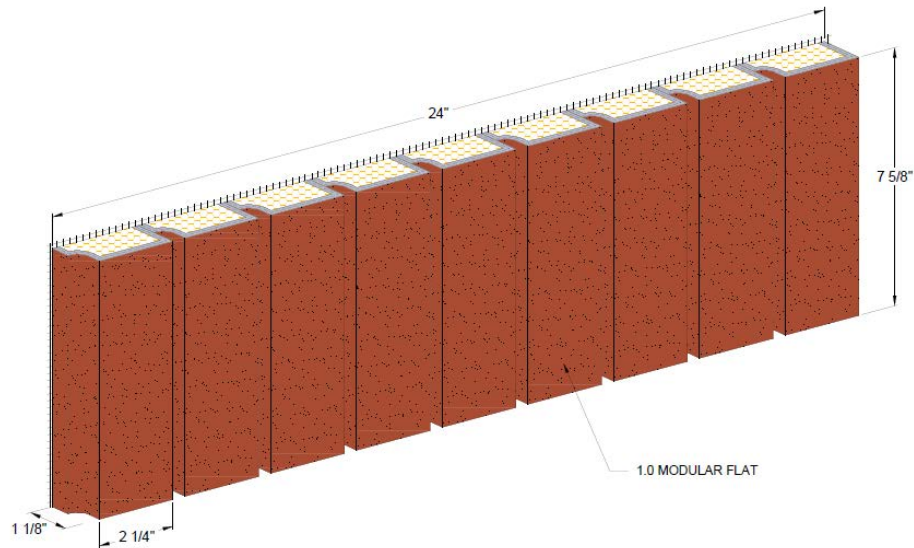

NewBrick®

NewBrick Mosaic Dimensions

NOTE:

1. NEWBRICK HAS A MINIMUM THICKNESS OF 1 1/8 in (29mm), UNLESS OTHERWISE NOTED.
2. NEWBRICK HAS A 3/8 IN (9.5mm) HORIZONTAL ALIGNMENT GUIDE.

The architecture, engineering, and design of the project using the Dryvit products is the responsibility of the project's design professional. All systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit specifically disclaims any liability for the use of this detail and for the architecture, design, engineering or workmanship of any project. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. Use of a functionally equivalent detail does not violate Dryvit's warranty. This detail is subject to change without notice. Contact Dryvit to ensure you have the most recent version.