

Metalite® FC SEL

Modular Click Rail with Individual Helping Hands



Single Panel Aluminum Rainscreen Cladding System

DS1076

Metalite® FC SEL

Modular Click Rail with Individual Helping Hands

Installation Details

Table of Contents

Detail

Vertical Joint Small - System Configuration	3-A 101
Vertical Joint Small - External Corner (90°) - Option 1	3-A 102
Vertical Joint Small - External Corner (90°) - Option 2	3-A 102B
Vertical Joint Small - Internal Corner (90°)	3-A 103
Vertical Joint Small - Window Sill	3-A 104
Vertical Joint Small - Window Jamb - Option 1	3-A 105
Vertical Joint Small - Window Jamb - Option 2	3-A 105A
Vertical Joint Small - Window Head - Option 1	3-A 106
Vertical Joint Small - Window Head - Option 2	3-A 107
Vertical Joint Small - Window Head - Option 3	3-A 107A
Vertical Joint Small - Base	3-A 108
Vertical Joint Small - Parapet	3-A 109
Vertical Joint Wide - System Configuration	3-B 101
Vertical Joint Wide - External Corner (90°)	3-B 102
Vertical Joint Wide - Internal Corner (90°)	3-B 103
Vertical Joint Wide - Window Sill	3-B 104
Vertical Joint Wide - Window Jamb	3-B 105
Vertical Joint Wide - Window Head - Option 1	3-B 106
Vertical Joint Wide - Window Head - Option 2	3-B 107
Vertical Joint Wide - Base	3-B 108
Vertical Joint Wide - Parapet	3-B 109
Butt Joint - System Configuration	3-C 101
Butt Joint - External Corner (90°)	3-C 102
Butt Joint - Internal Corner (90°)	3-C 103
Butt Joint - Window Sill	3-C 104
Butt Joint - Window Jamb	3-C 105
Butt Joint - Window Head - Option 1	3-C 106
Butt Joint - Window Head - Option 2	3-C 107
Butt Joint - Base	3-C 108
Butt Joint - Parapet	3-C 109
Fitted Joint - System Configuration	3-D 101
Fitted Joint - External Corner (90°)	3-D 102
Fitted Joint - Internal Corner (90°)	3-D 103
Fitted Joint - Window Sill	3-D 104

Detail

Fitted Joint - Window Jamb	3-D 105
Fitted Joint - Window Head - Option 1	3-D 106
Fitted Joint - Window Head - Option 2	3-D 106A
Fitted Joint - Window Head - Option 3	3-D 107
Fitted Joint - Base	3-D 108
Fitted Joint - Parapet	3-D 109

NOTE:

DRYVIT MAKES NO REPRESENTATION REGARDING CONFORMITY OF ITS SUGGESTIONS TO MODEL BUILDING CODES, ENGINEERING CRITERIA, SPECIFIC APPLICATIONS, OR PROJECT LOCATIONS. ALL COMPONENTS INDICATED IN ILLUSTRATIONS, AS WELL AS OTHERS THAT MAY BE REQUIRED FOR THE INTEGRITY OF THE SYSTEM SHALL BE DESIGNED, DETAILED, AND ENGINEERED BY REPRESENTATIVES OF THE ARCHITECT, OWNER, OR CONTRACTOR TO BE IN CONFORMANCE WITH MODEL CODES, ARCHITECTURAL, AND ENGINEERING REQUIREMENTS PERTAINING TO SPECIFIC BUILDING PROJECTS.

DRYVIT MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE ARCHITECTURAL DESIGN, ENGINEERING, OR WORKMANSHIP OF PROJECTS UTILIZING DRYVIT SYSTEMS OR PRODUCTS.

THE LIABILITIES OF DRYVIT SHALL BE AS STATED IN THE DRYVIT STANDARD WARRANTY. CONTACT DRYVIT FOR A FULL AND COMPLETE COPY OF THE WARRANTY.

This detail is for general informational purposes only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Table of Contents

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Scale: NA

Revision #: 0

Revised by: NA

Date: 8/14/2026


File Name:

TOC



Construction Products Group

www.tremcocpg.com

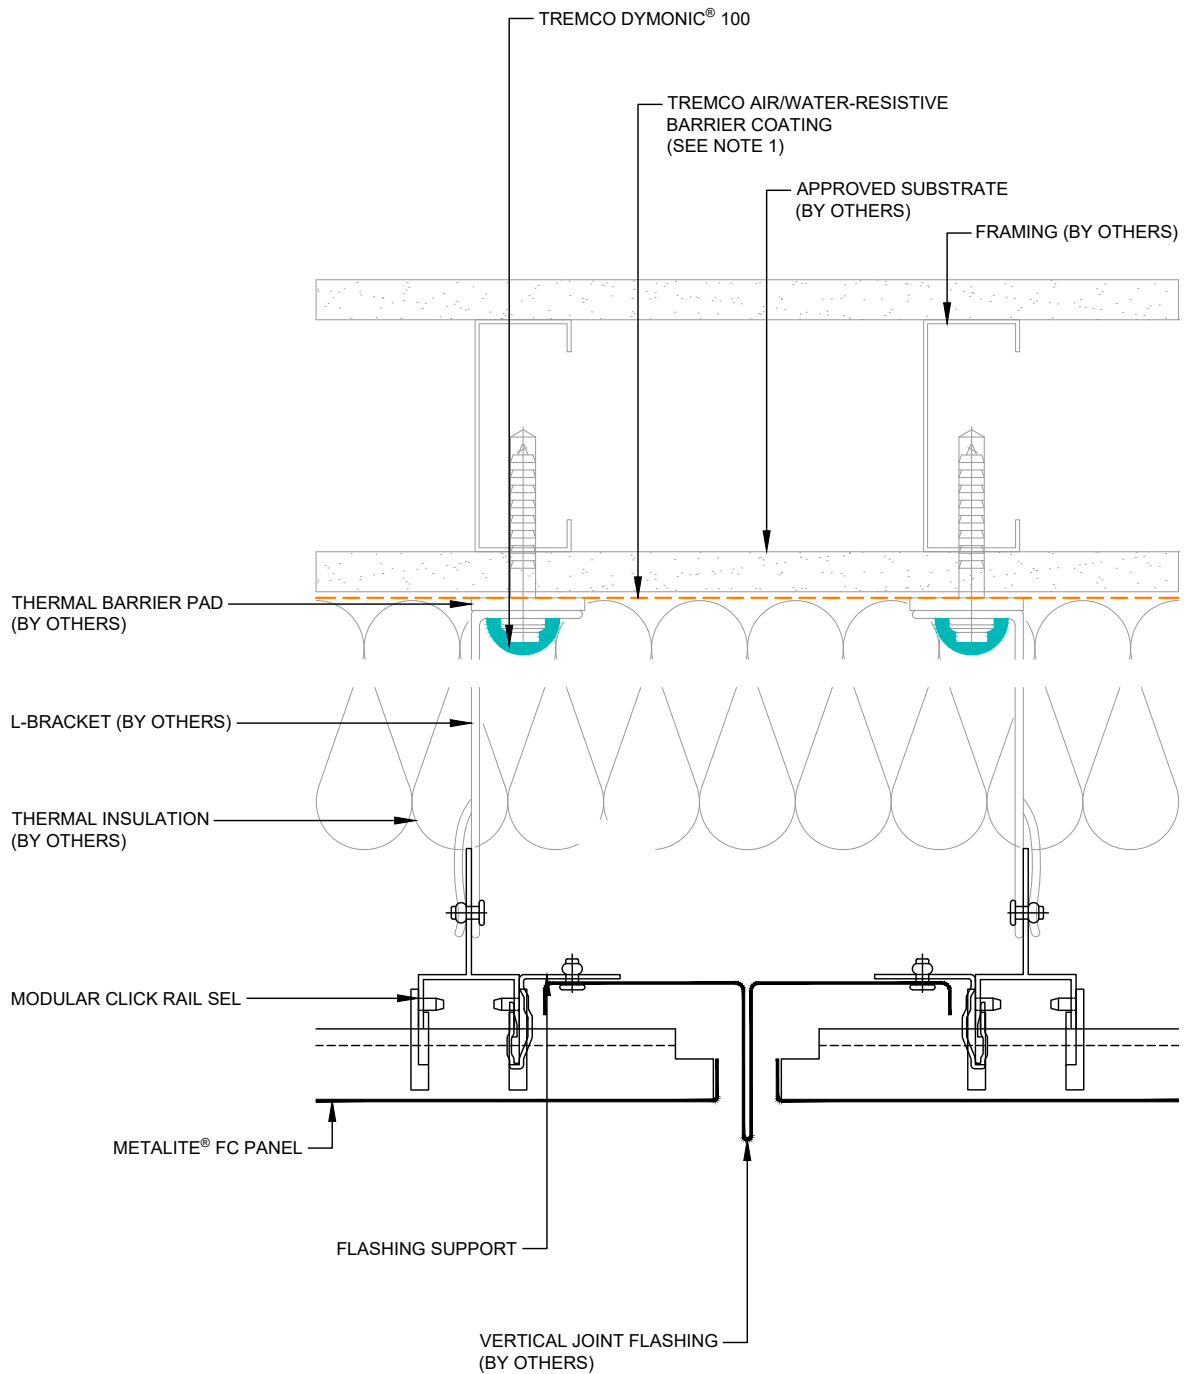

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Vertical Joint Small - System Configuration

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Scale: 4" = 1'-0"

Revision #: 00

Revised by: NA

Date: 8/14/2026


www.tremcocpg.com

File Name:

3-A 101



Construction Products Group

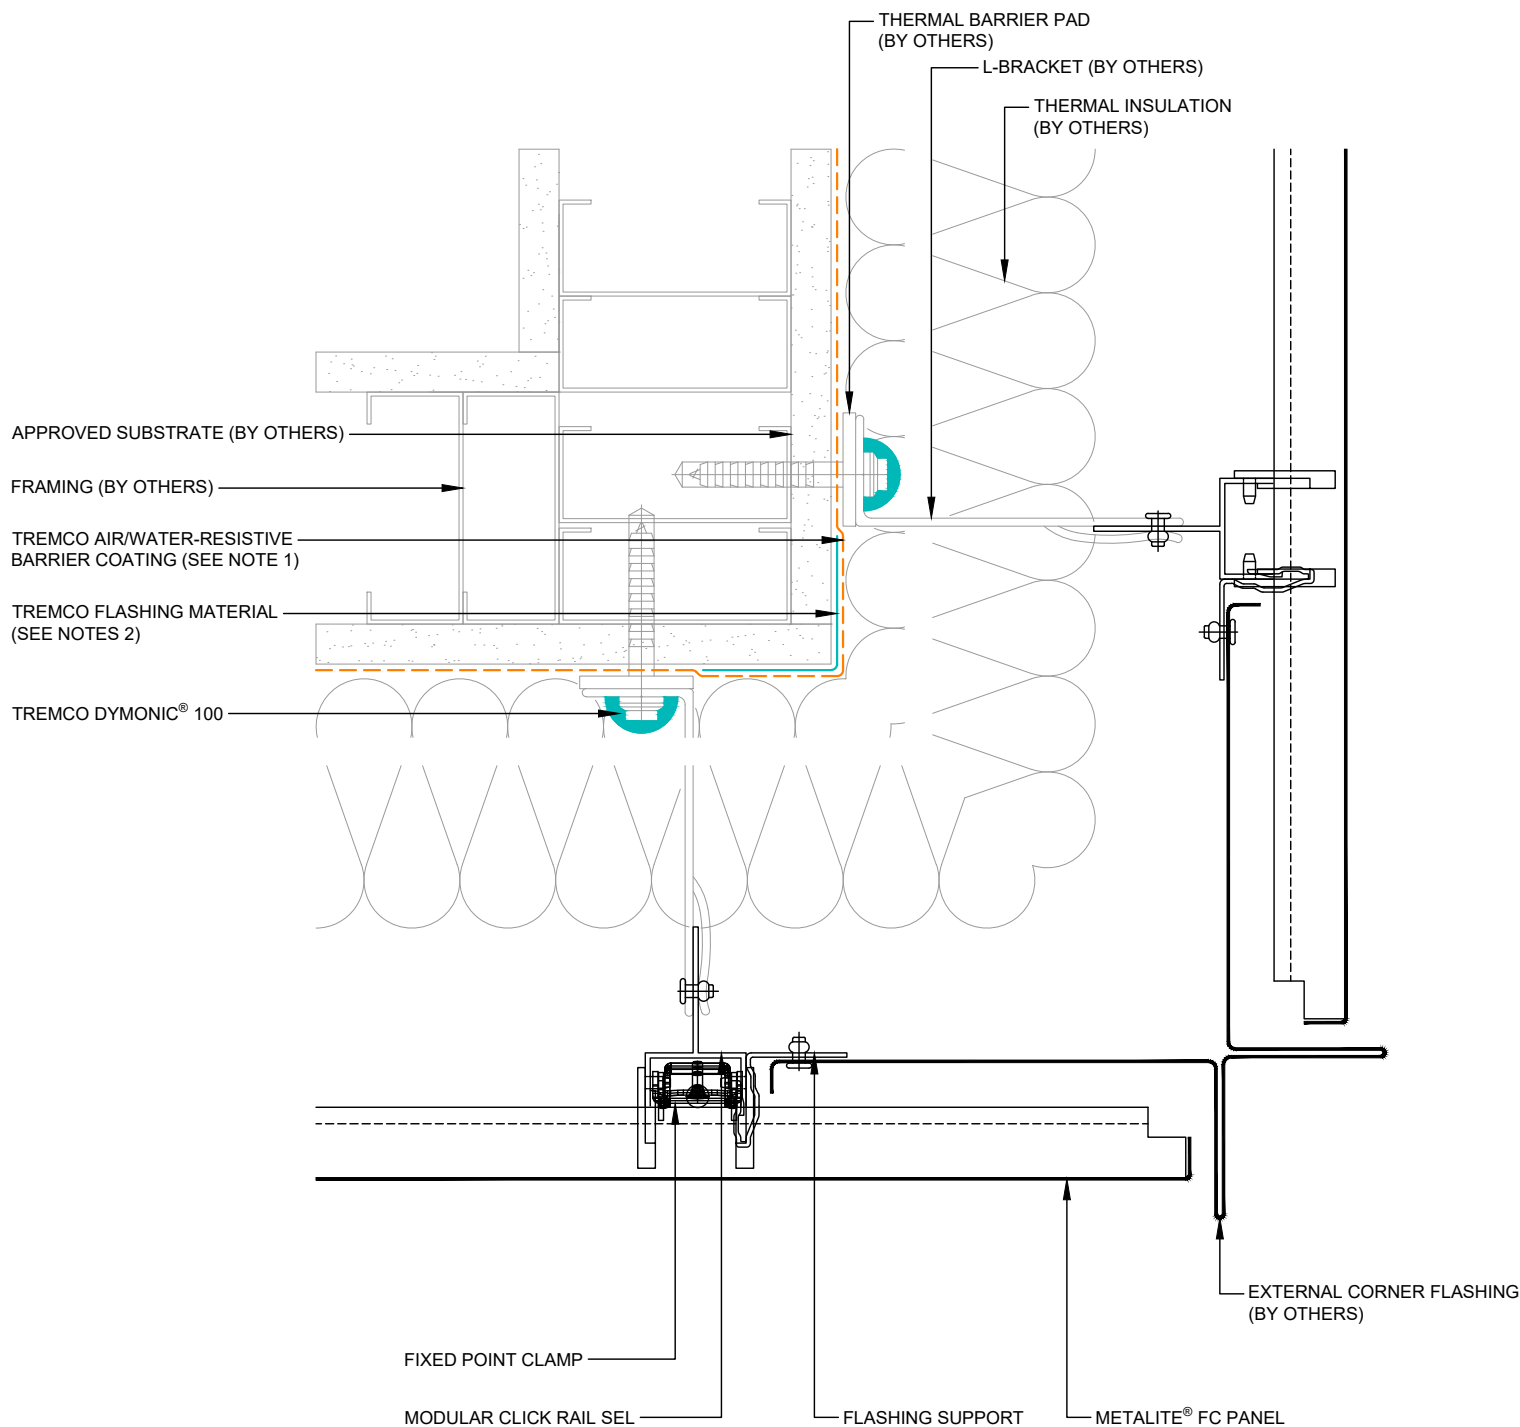

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Vertical Joint Small - External Corner (90°) - Option 1

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Revision #: 00

Revised by: NA

Scale: 4" = 1'-0"

Date: 8/14/2026


www.tremcocpg.com

File Name:

3-A 102



Construction Products Group

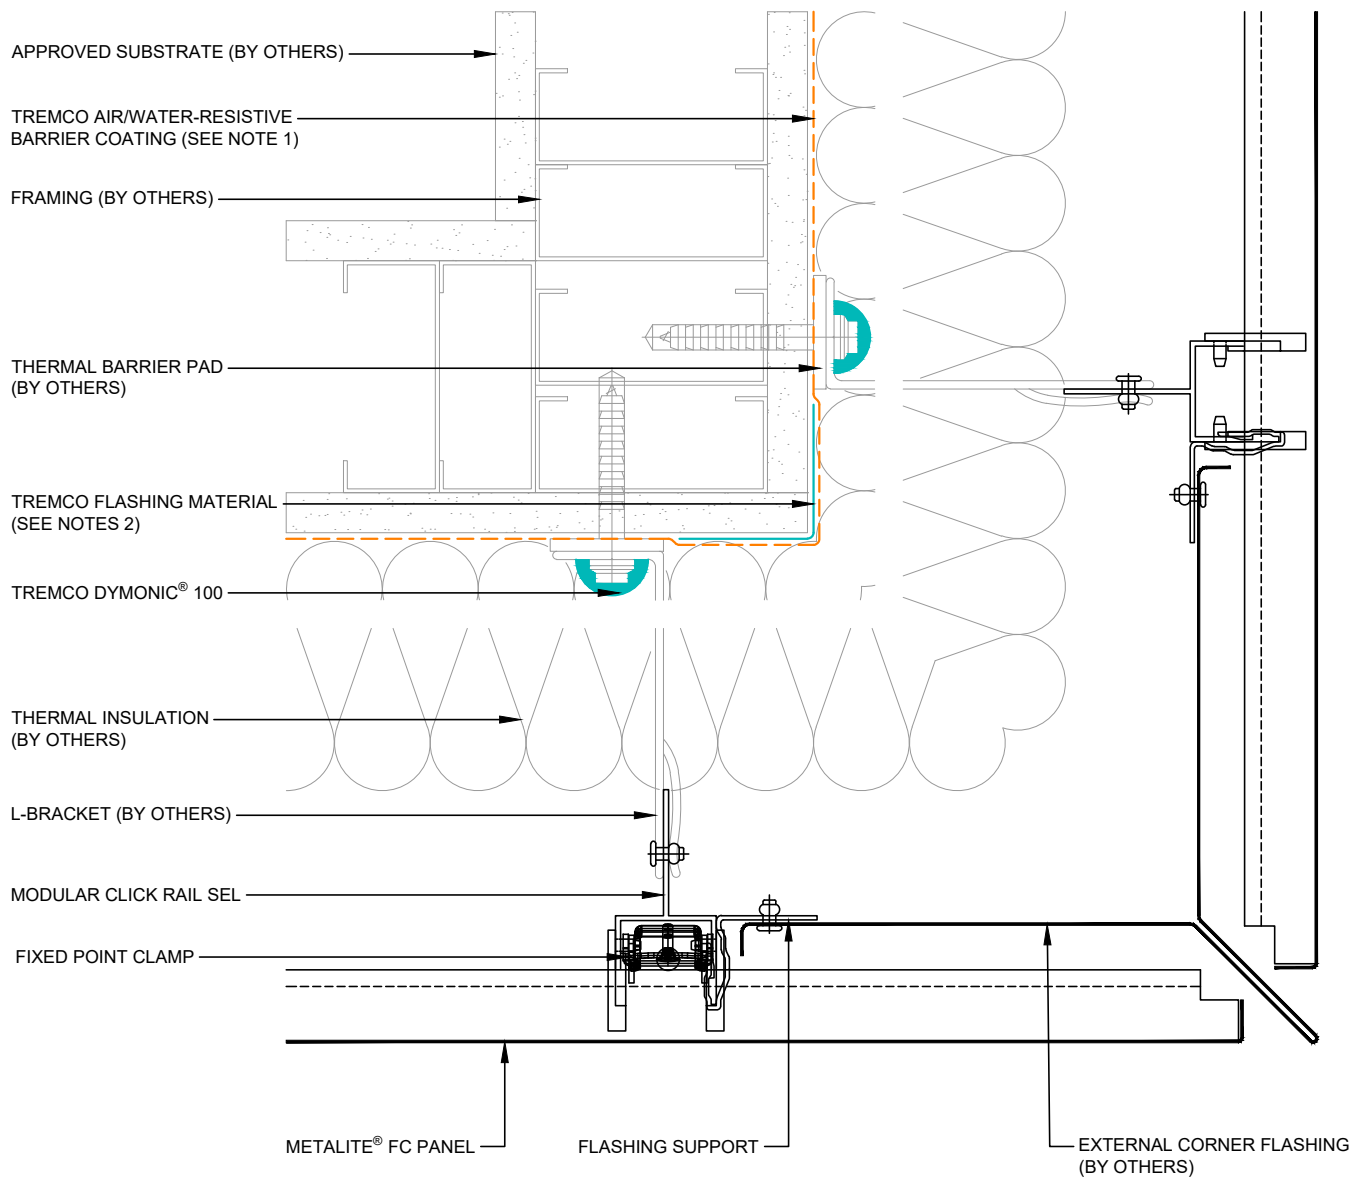

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Vertical Joint Small - Internal Corner (90°) - Option 2

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Revision #: 00

Revised by: NA

Scale: 4" = 1'-0"

Date: 8/14/2026


www.tremcocpg.com

File Name:

3-A 102B



Construction Products Group

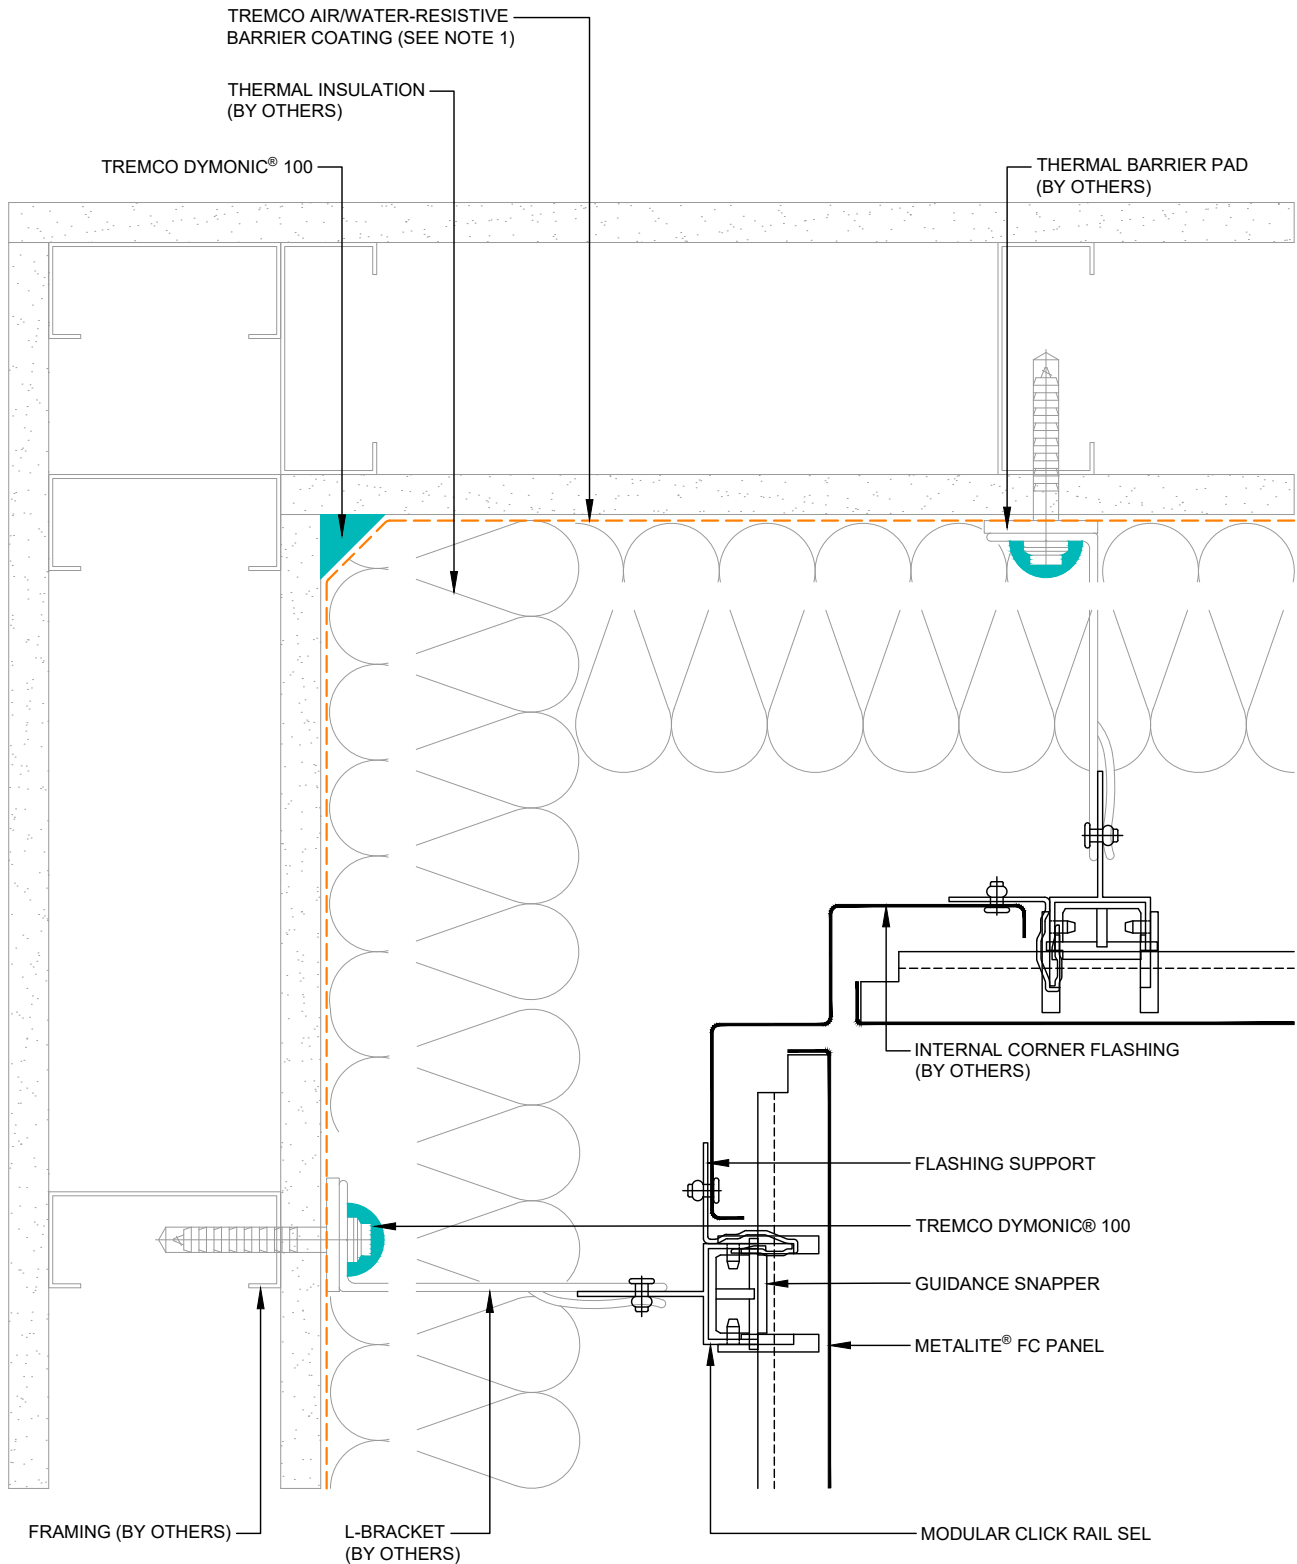

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Vertical Joint Small - Internal Corner (90°)

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Scale: 4" = 1'-0"

Revision #: 00

Revised by: NA

Date: 8/14/2026


www.tremcocpg.com

File Name:

3-A 103



Construction Products Group

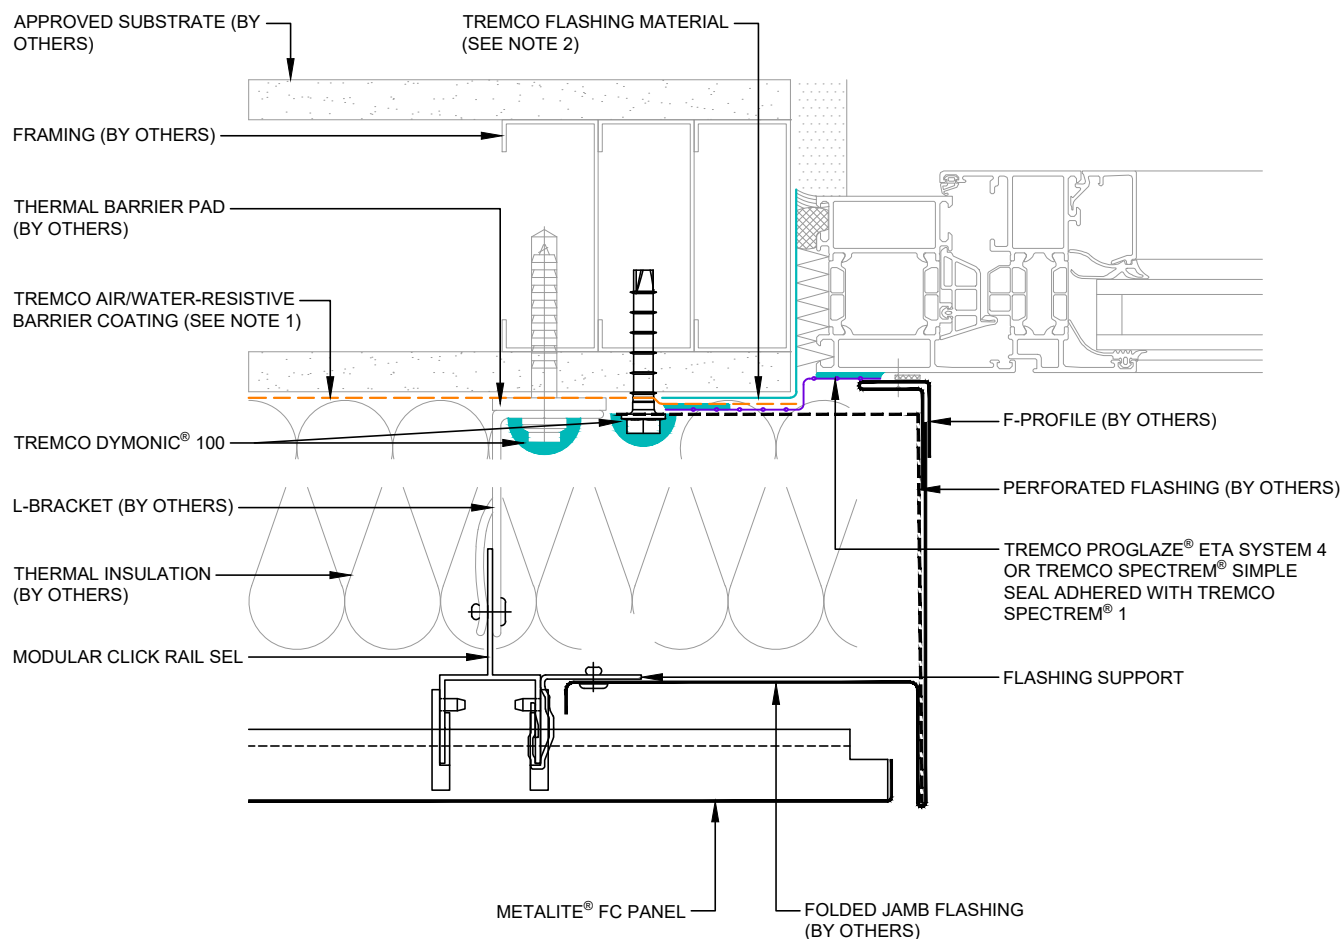

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Vertical Joint Small - Window Jamb - Option 2

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Scale: 4" = 1'-0"

Revision #: 00

Revised by: NA

Date: 8/14/2026


File Name:

3-A 105A



Construction Products Group

www.tremcocpg.com

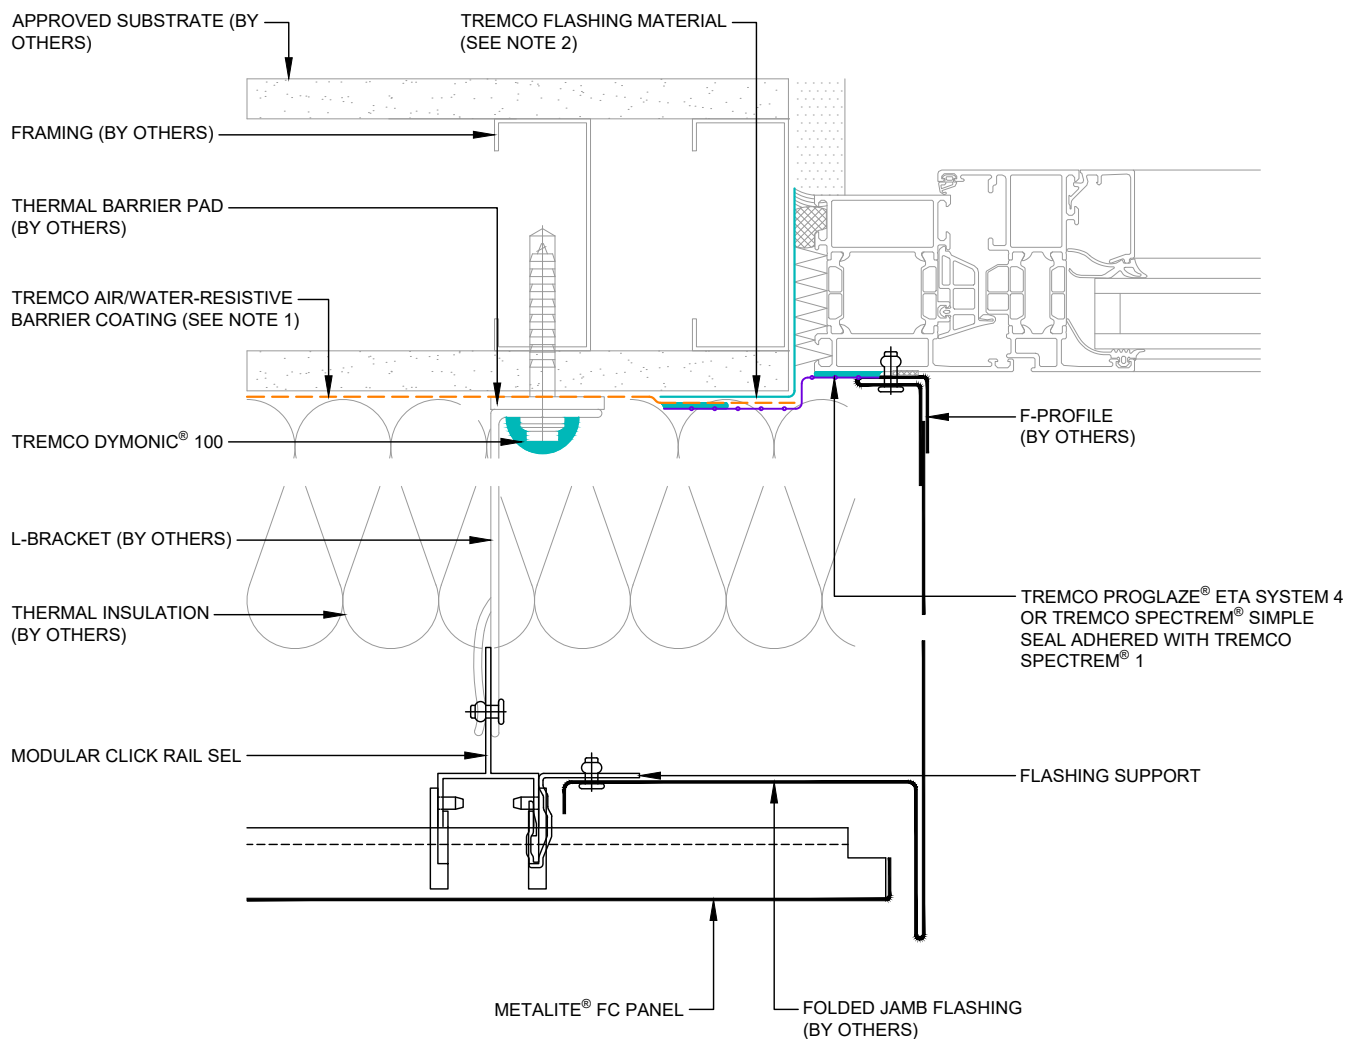

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Vertical Joint Small - Window Jamb - Option 1

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Scale: 4" = 1'-0"

Revision #: 00

Revised by: NA

Date: 8/14/2026

File Name:


3-A 105



Construction Products Group

www.tremcocpg.com



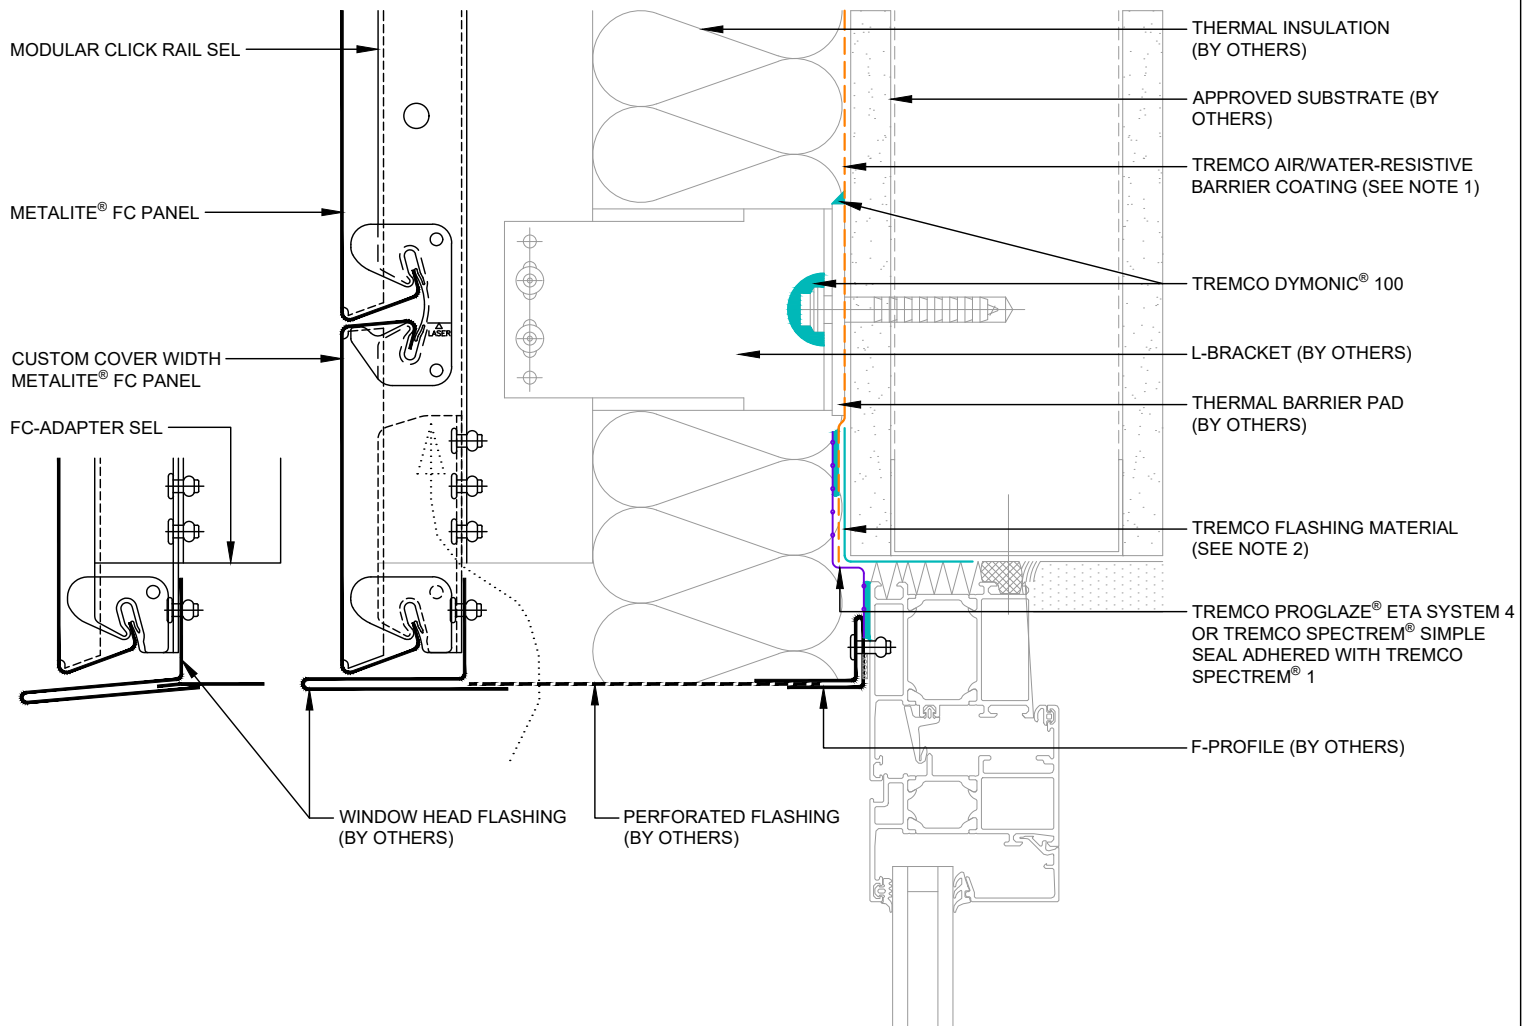

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Vertical Joint Small - Window Head - Option 1

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Scale: 4" = 1'-0"

Revision #: 00

Revised by: NA

Date: 8/14/2026


www.tremcocpg.com

File Name:

3-A 106



Construction Products Group

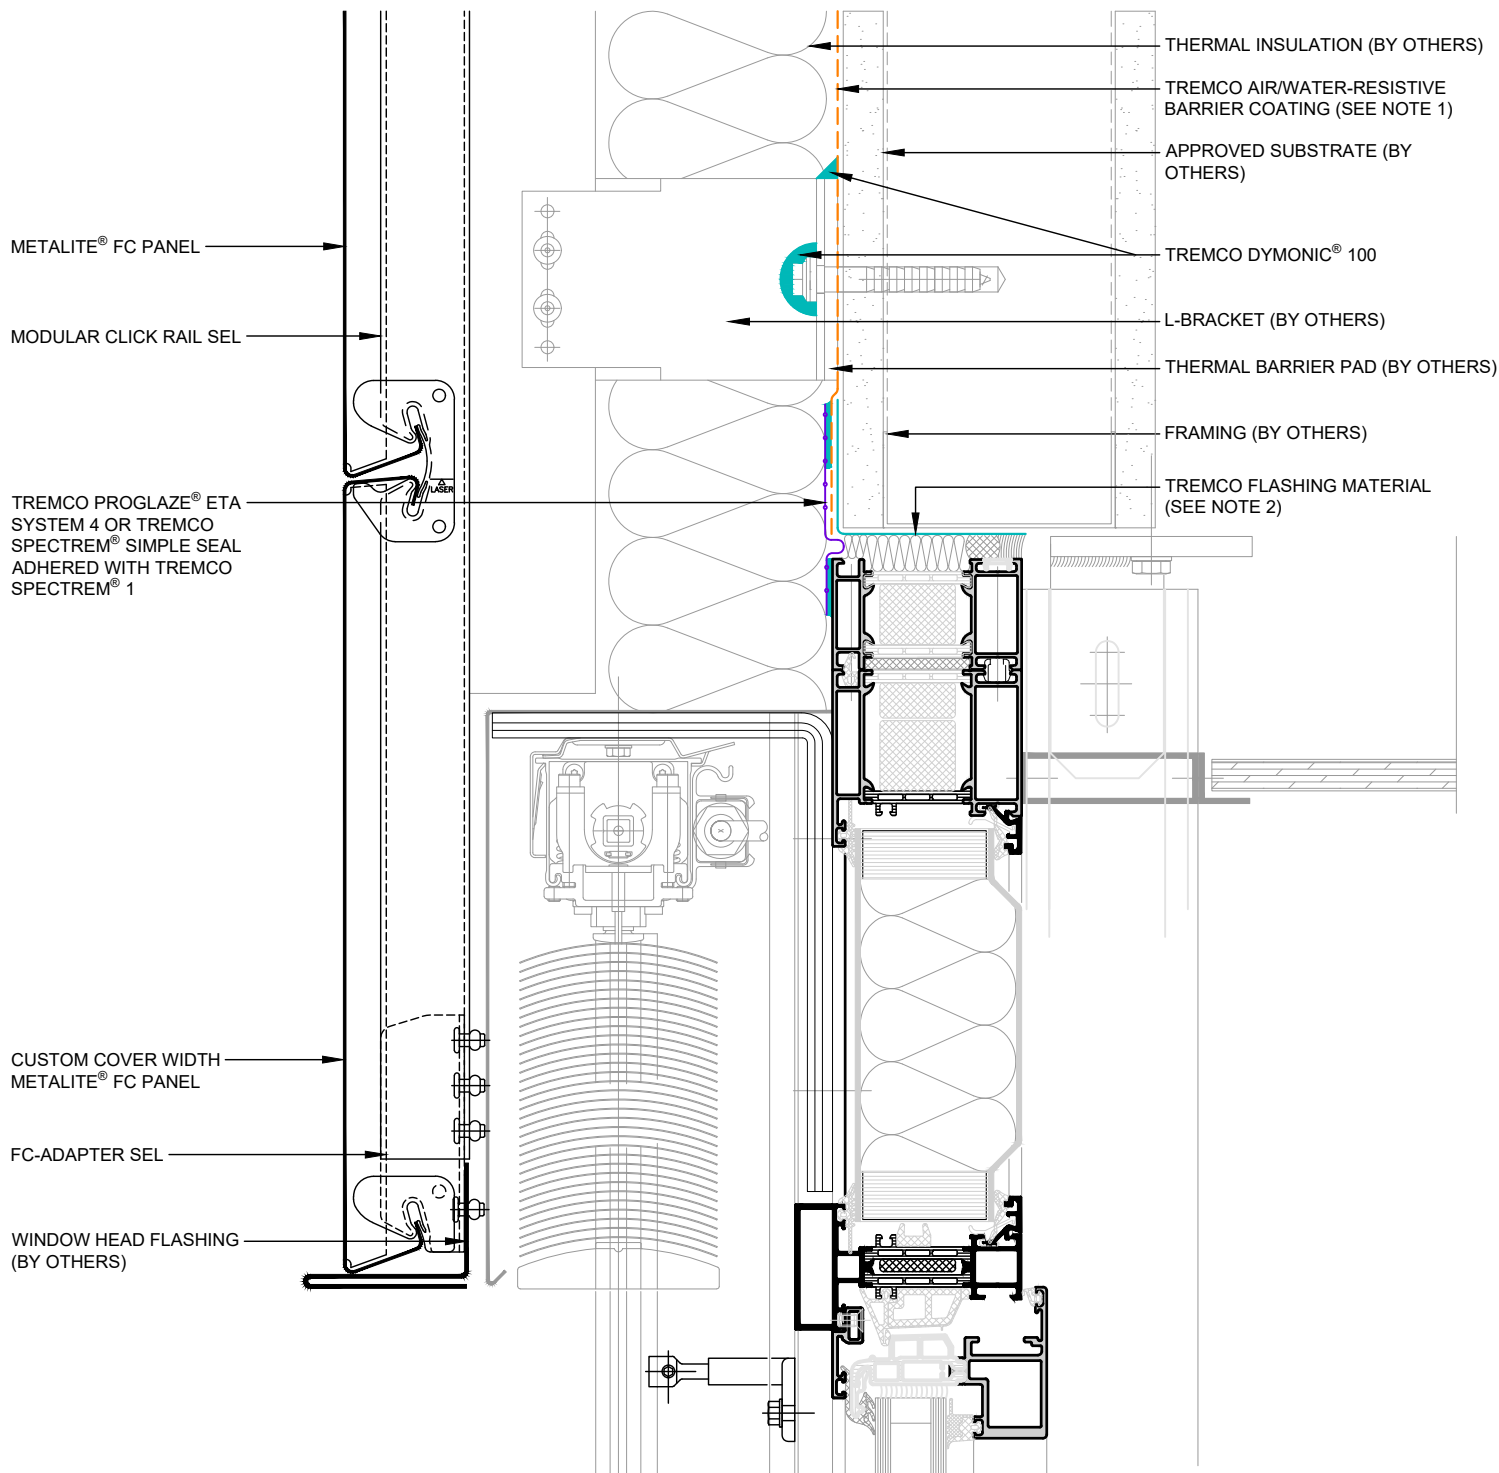

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752


Detail: Vertical Joint Small - Window Head - Option 2		
Drawn by: MSCO	Checked by: MD, MW, DV, AM	Scale: 4" = 1'-0"
Revision #: 00	Revised by: NA	Date: 8/14/2026

File Name:

3-A 107



www.tremcocpg.com

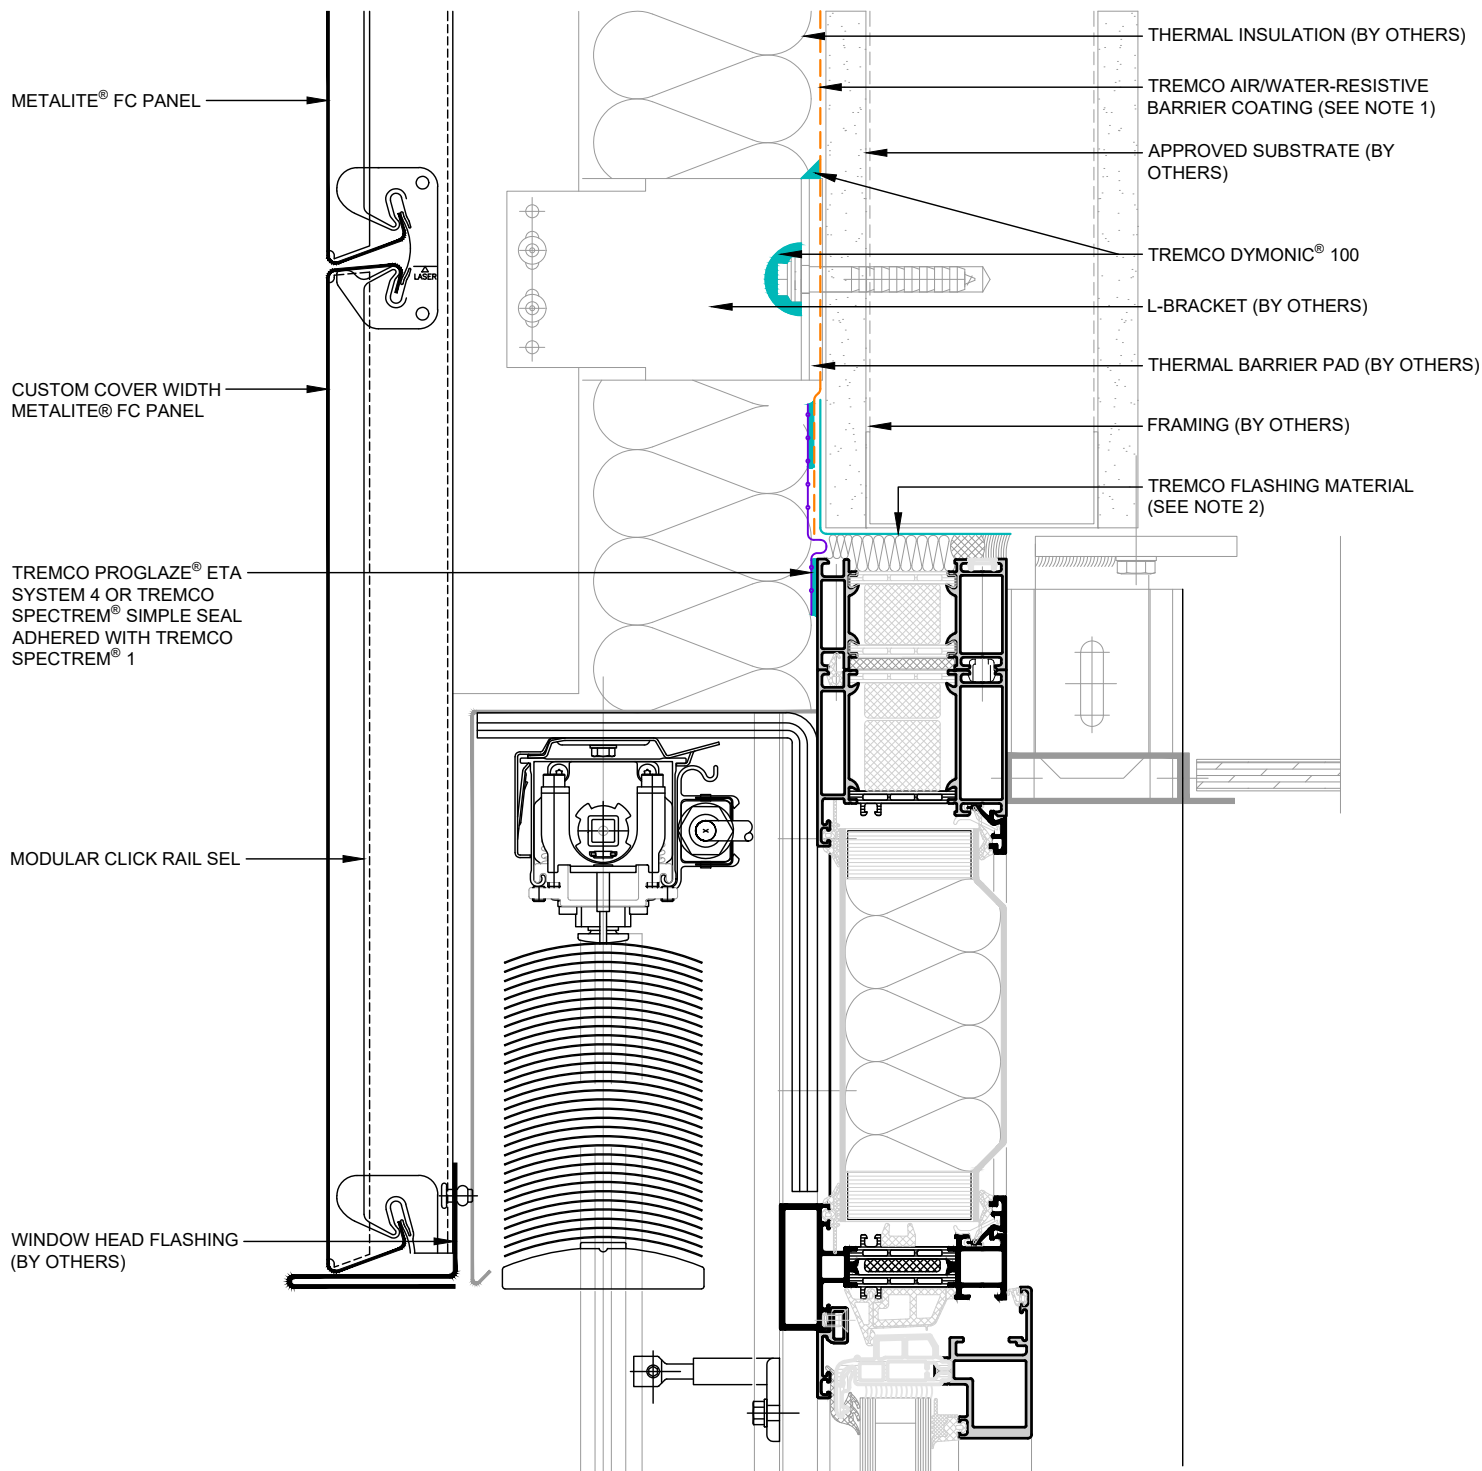

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Vertical Joint Small - Window Head - Option 3

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Revision #: 00

Revised by: NA

Scale: 4" = 1'-0"

Date: 8/14/2026


www.tremcocpg.com

File Name:

3-A 107A



Construction Products Group

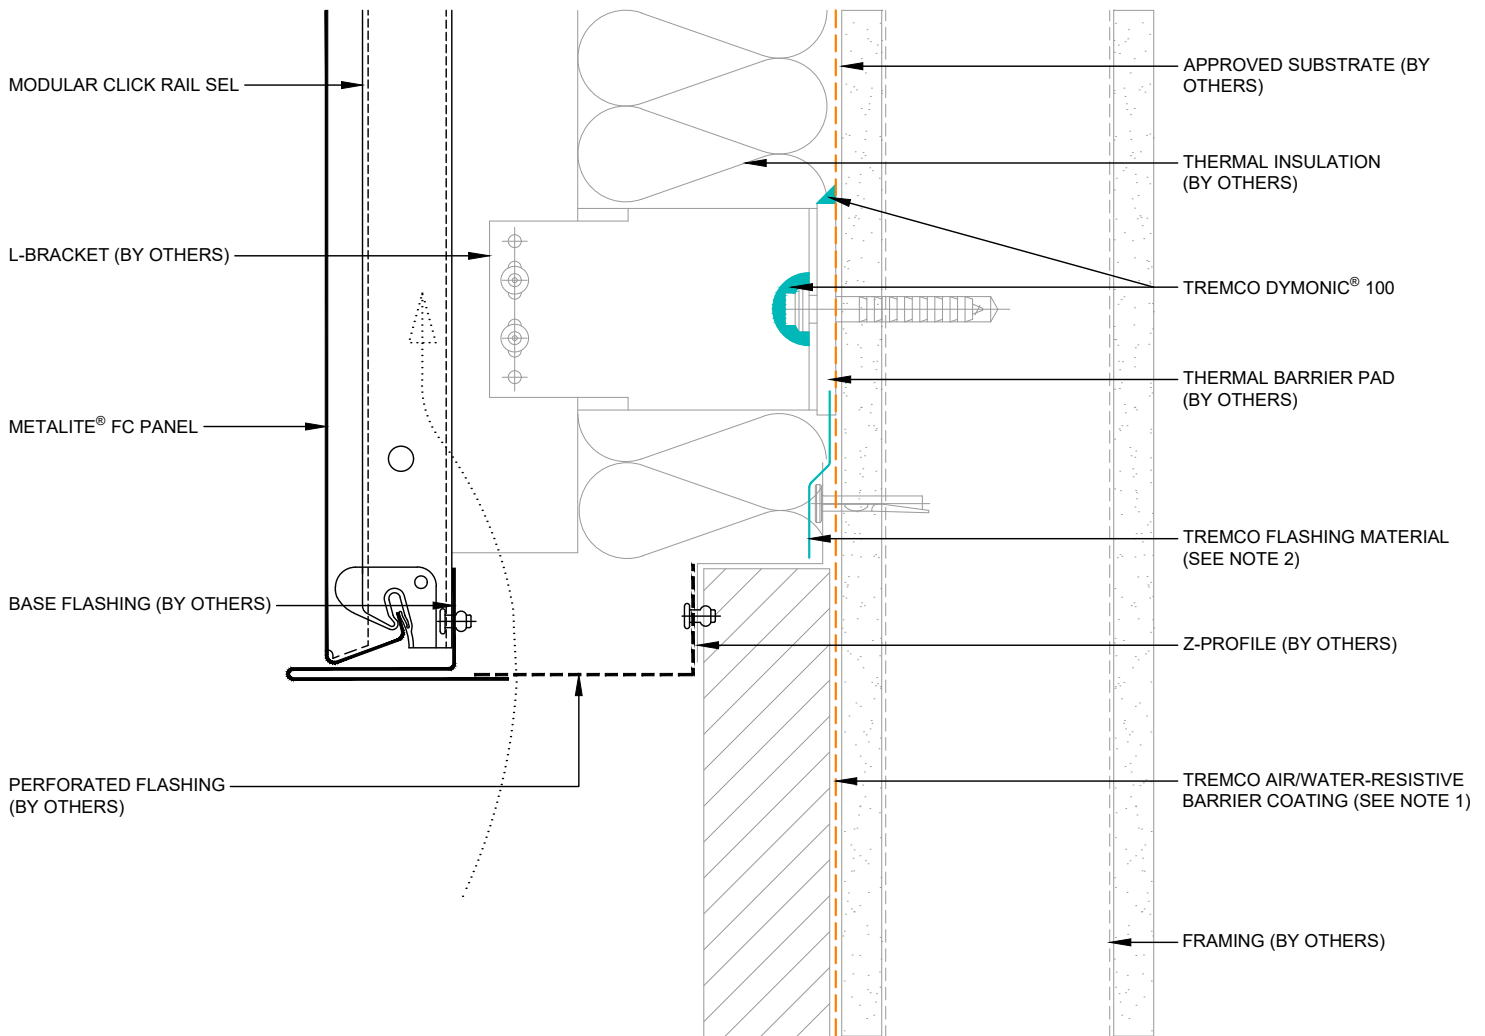


- NOTES:
1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
 2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
 3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands

 Dryvit Technical Support: 800-556-7752	Detail: Vertical Joint Small - Base			File Name:	
	Drawn by: MSCO	Checked by: MD, MW, DV, AM	Scale: 4" = 1'-0"	3-A 108	
	Revision #: 00	Revised by: NA	Date: 8/14/2026		
	www.tremcocpg.com			 Construction Products Group	

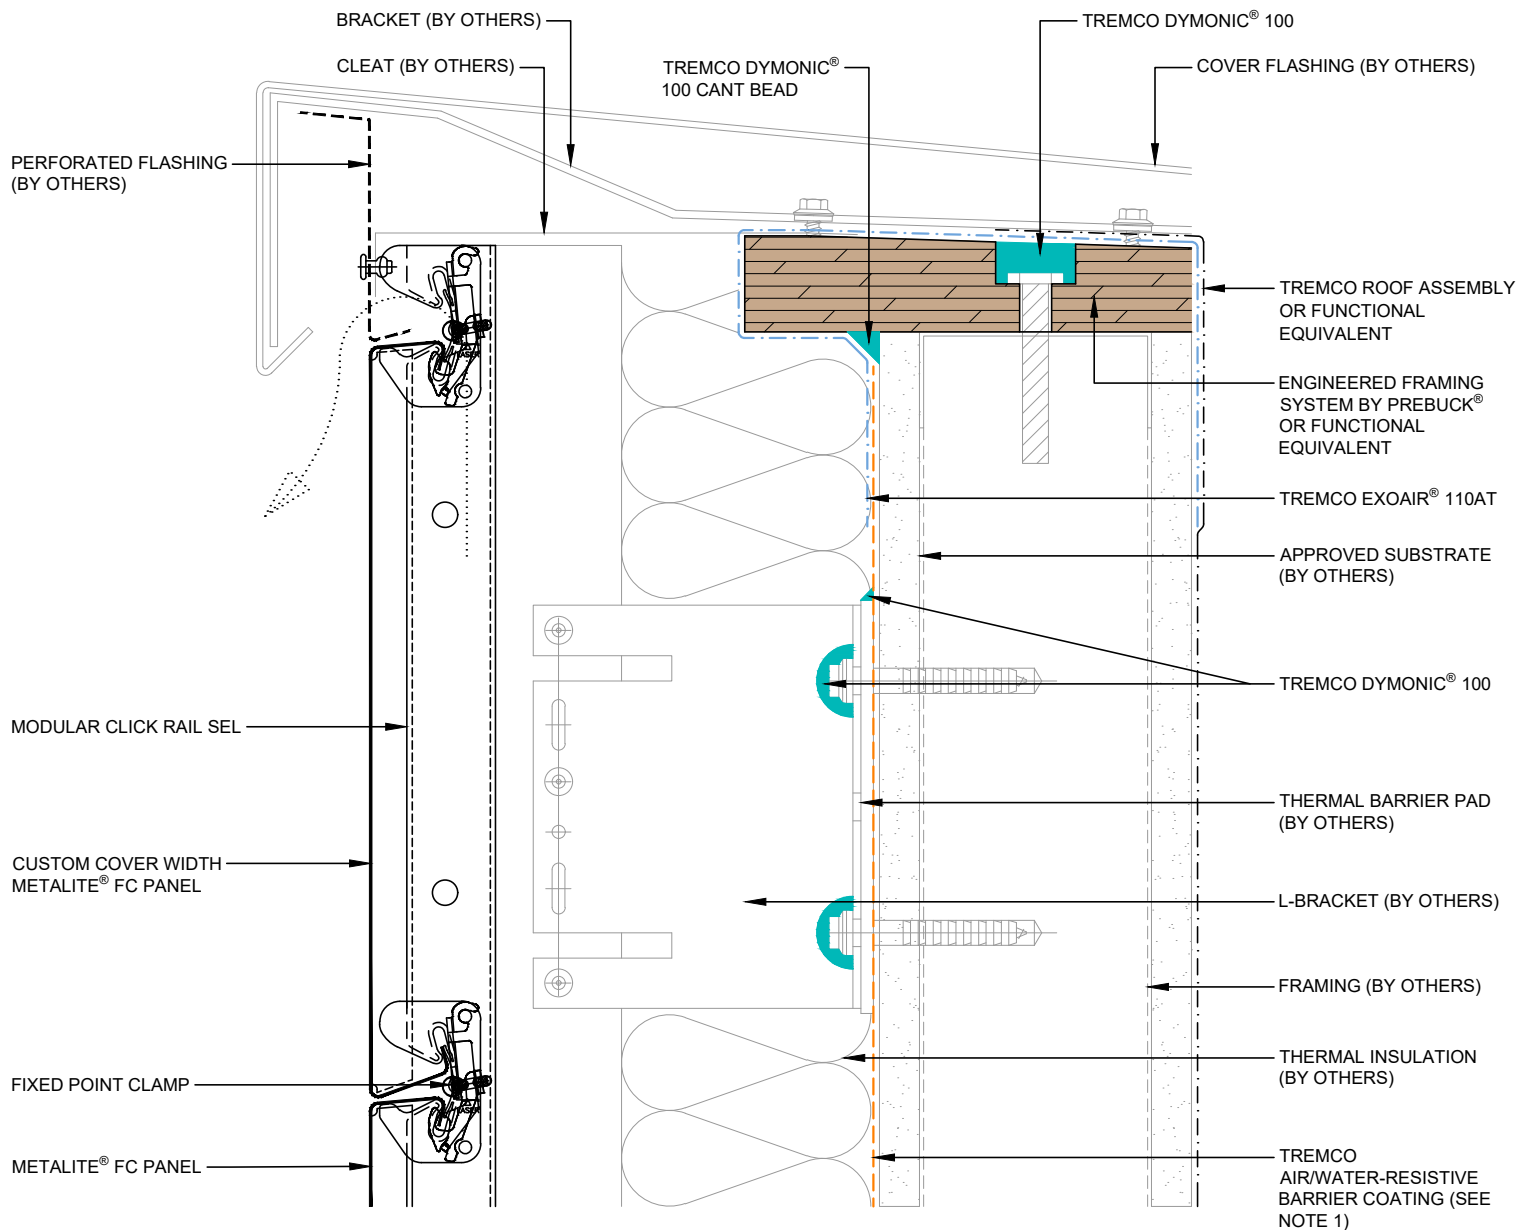

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Vertical Joint Small - Parapet

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Revision #: 00

Revised by: NA

Scale: 4" = 1'-0"

Date: 8/14/2026


www.tremcocpg.com

File Name:

3-A 109



Construction Products Group

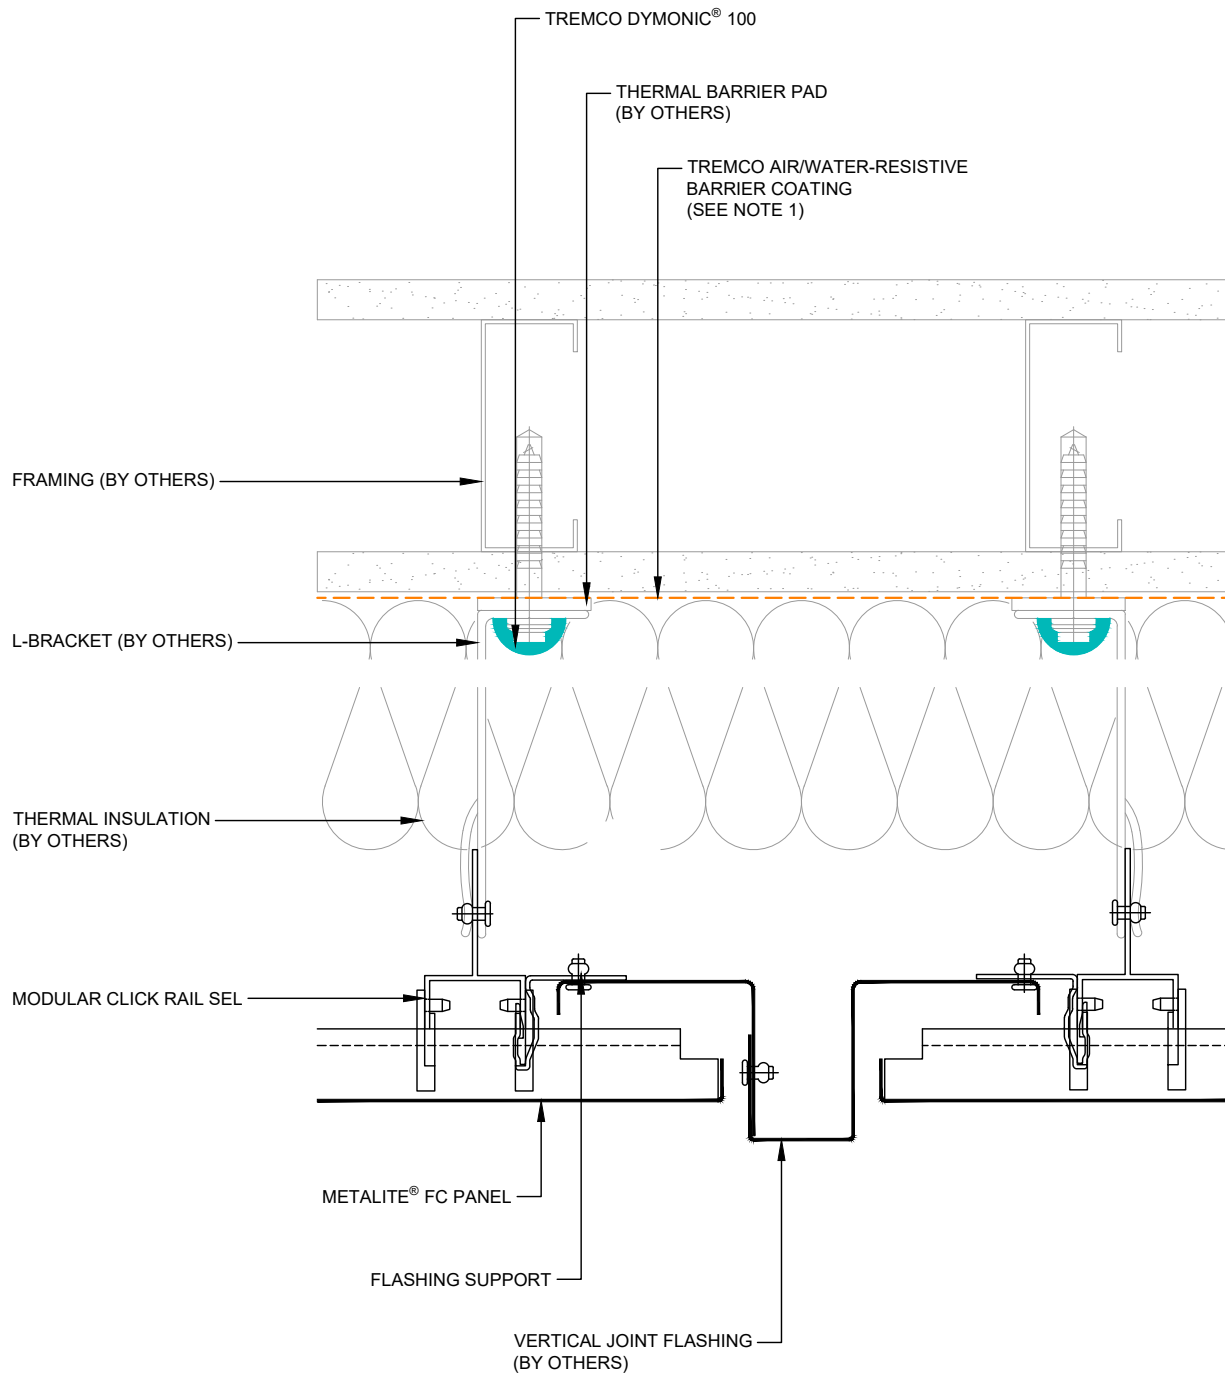

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Vertical Joint Wide - System Configuraton

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Scale: 4" = 1'-0"

Revision #: 00

Revised by: NA

Date: 8/14/2026


www.tremcocpg.com

File Name:

3-B 101



Construction Products Group

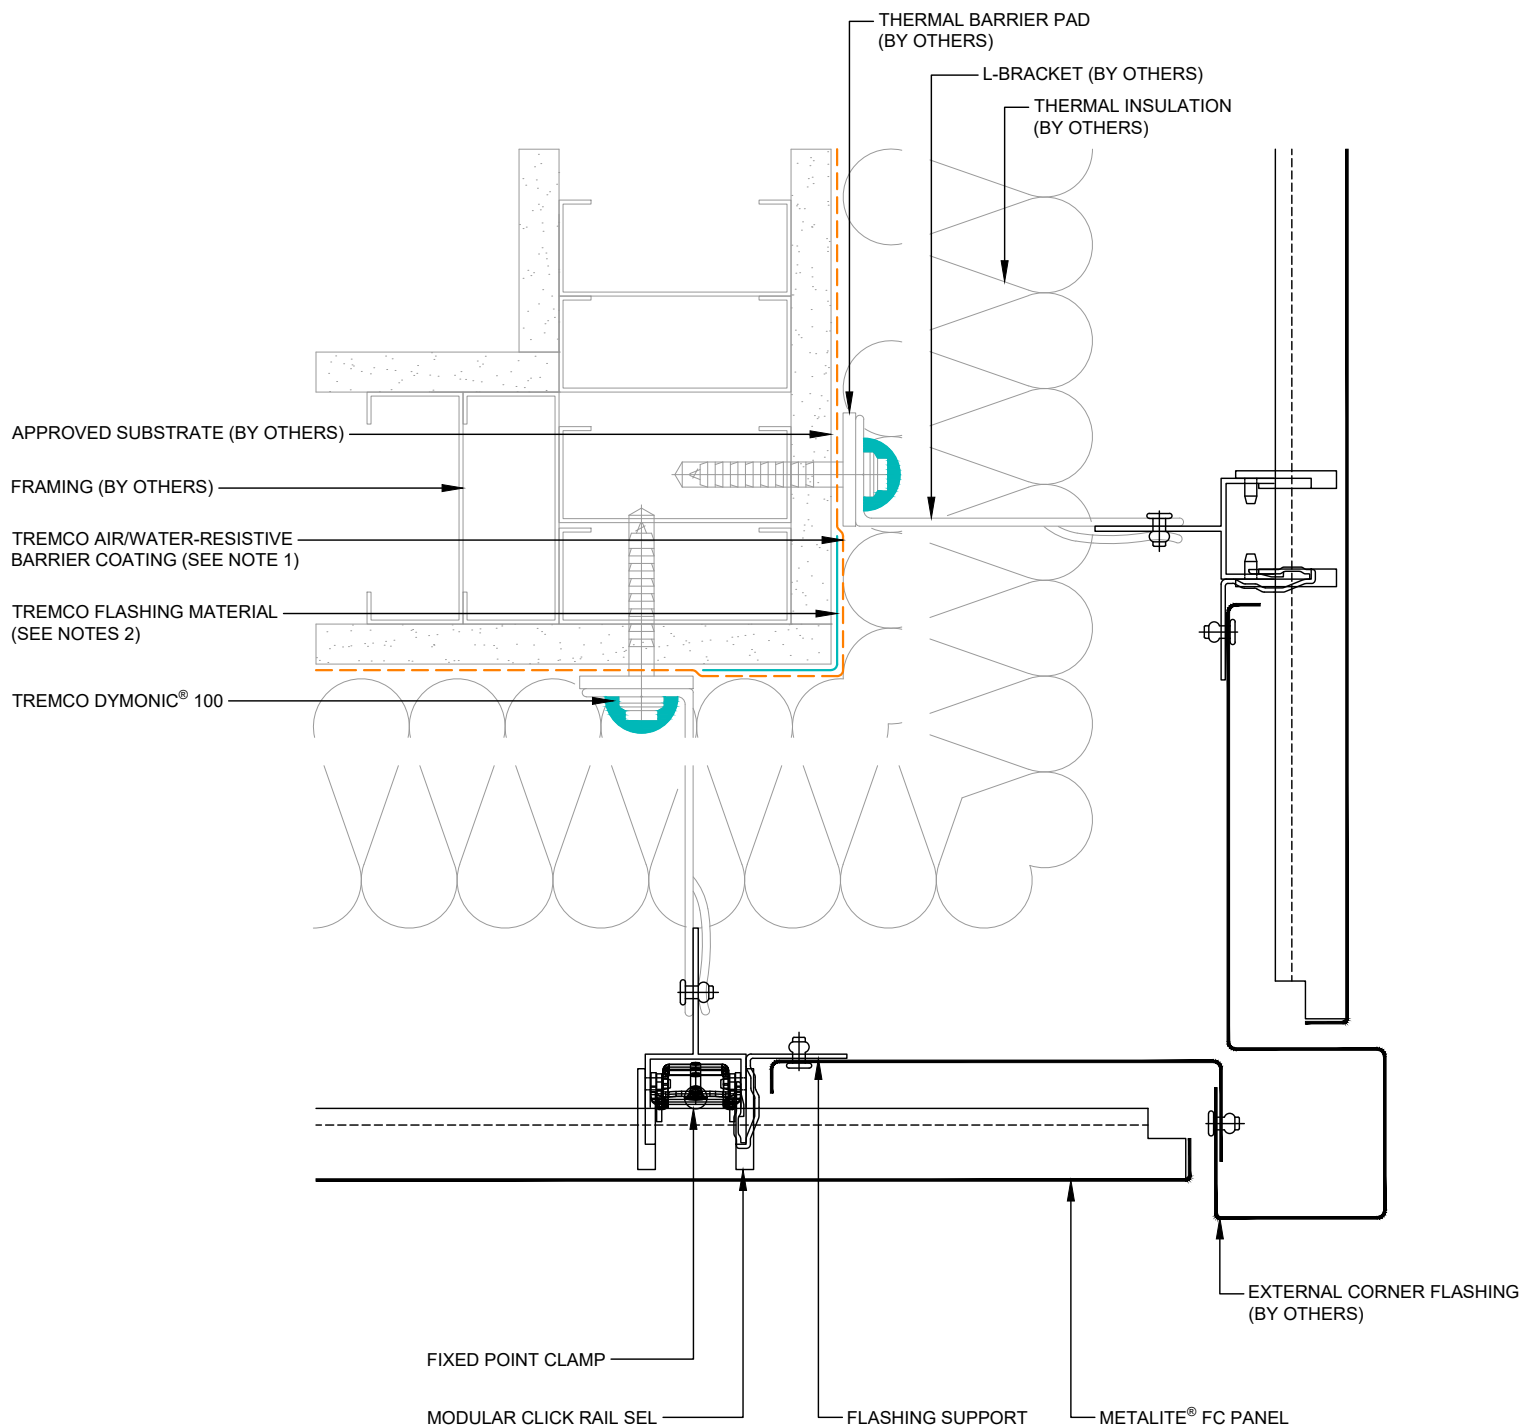

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Vertical Joint Wide - External Corner (90°)

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Revision #: 00

Revised by: NA

Scale: 4" = 1'-0"

Date: 8/14/2026


www.tremcocpg.com

File Name:

3-B 102



Construction Products Group

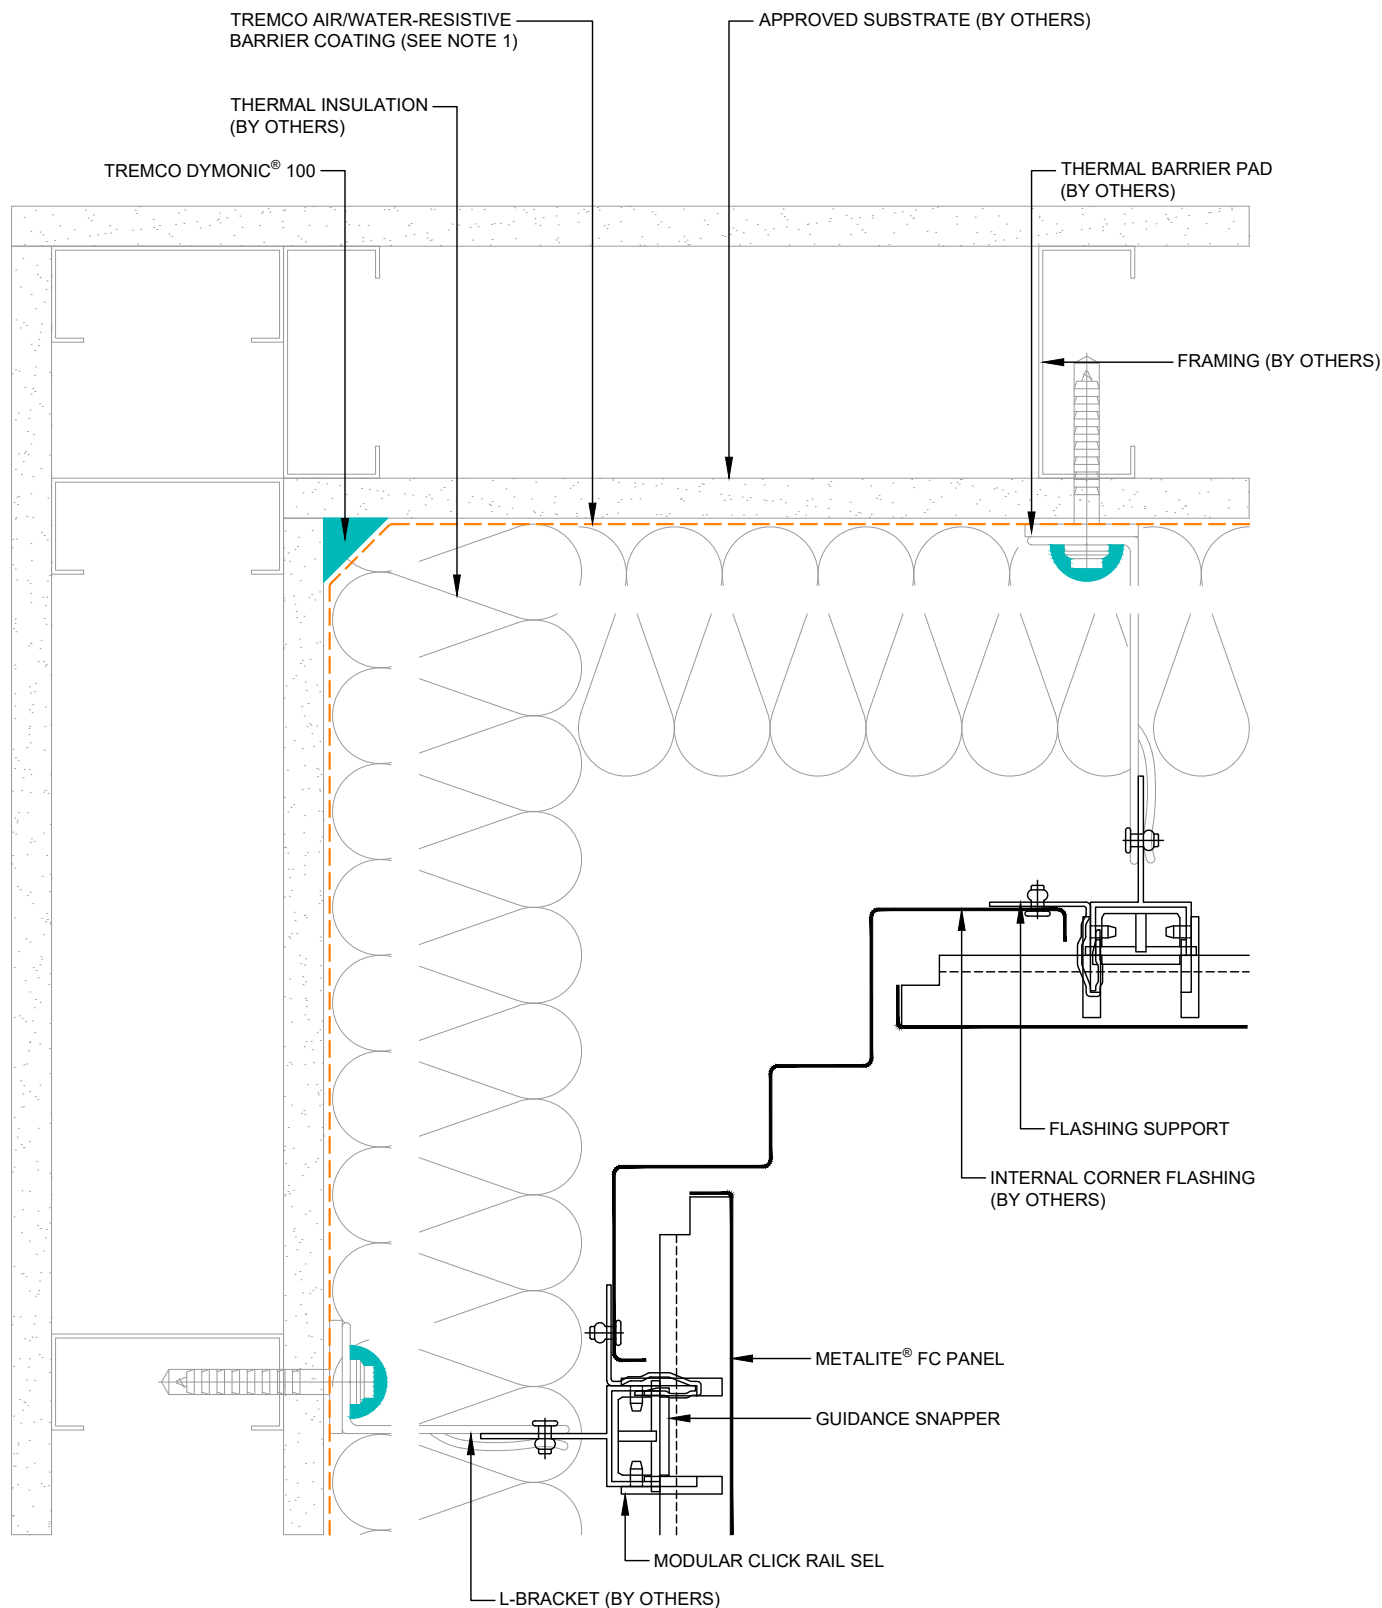

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Vertical Joint Wide - Internal Corner (90°)

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Revision #: 00

Revised by: NA

Scale: 4" = 1'-0"

Date: 8/14/2026


www.tremcocpg.com

File Name:

3-B 103



Construction Products Group

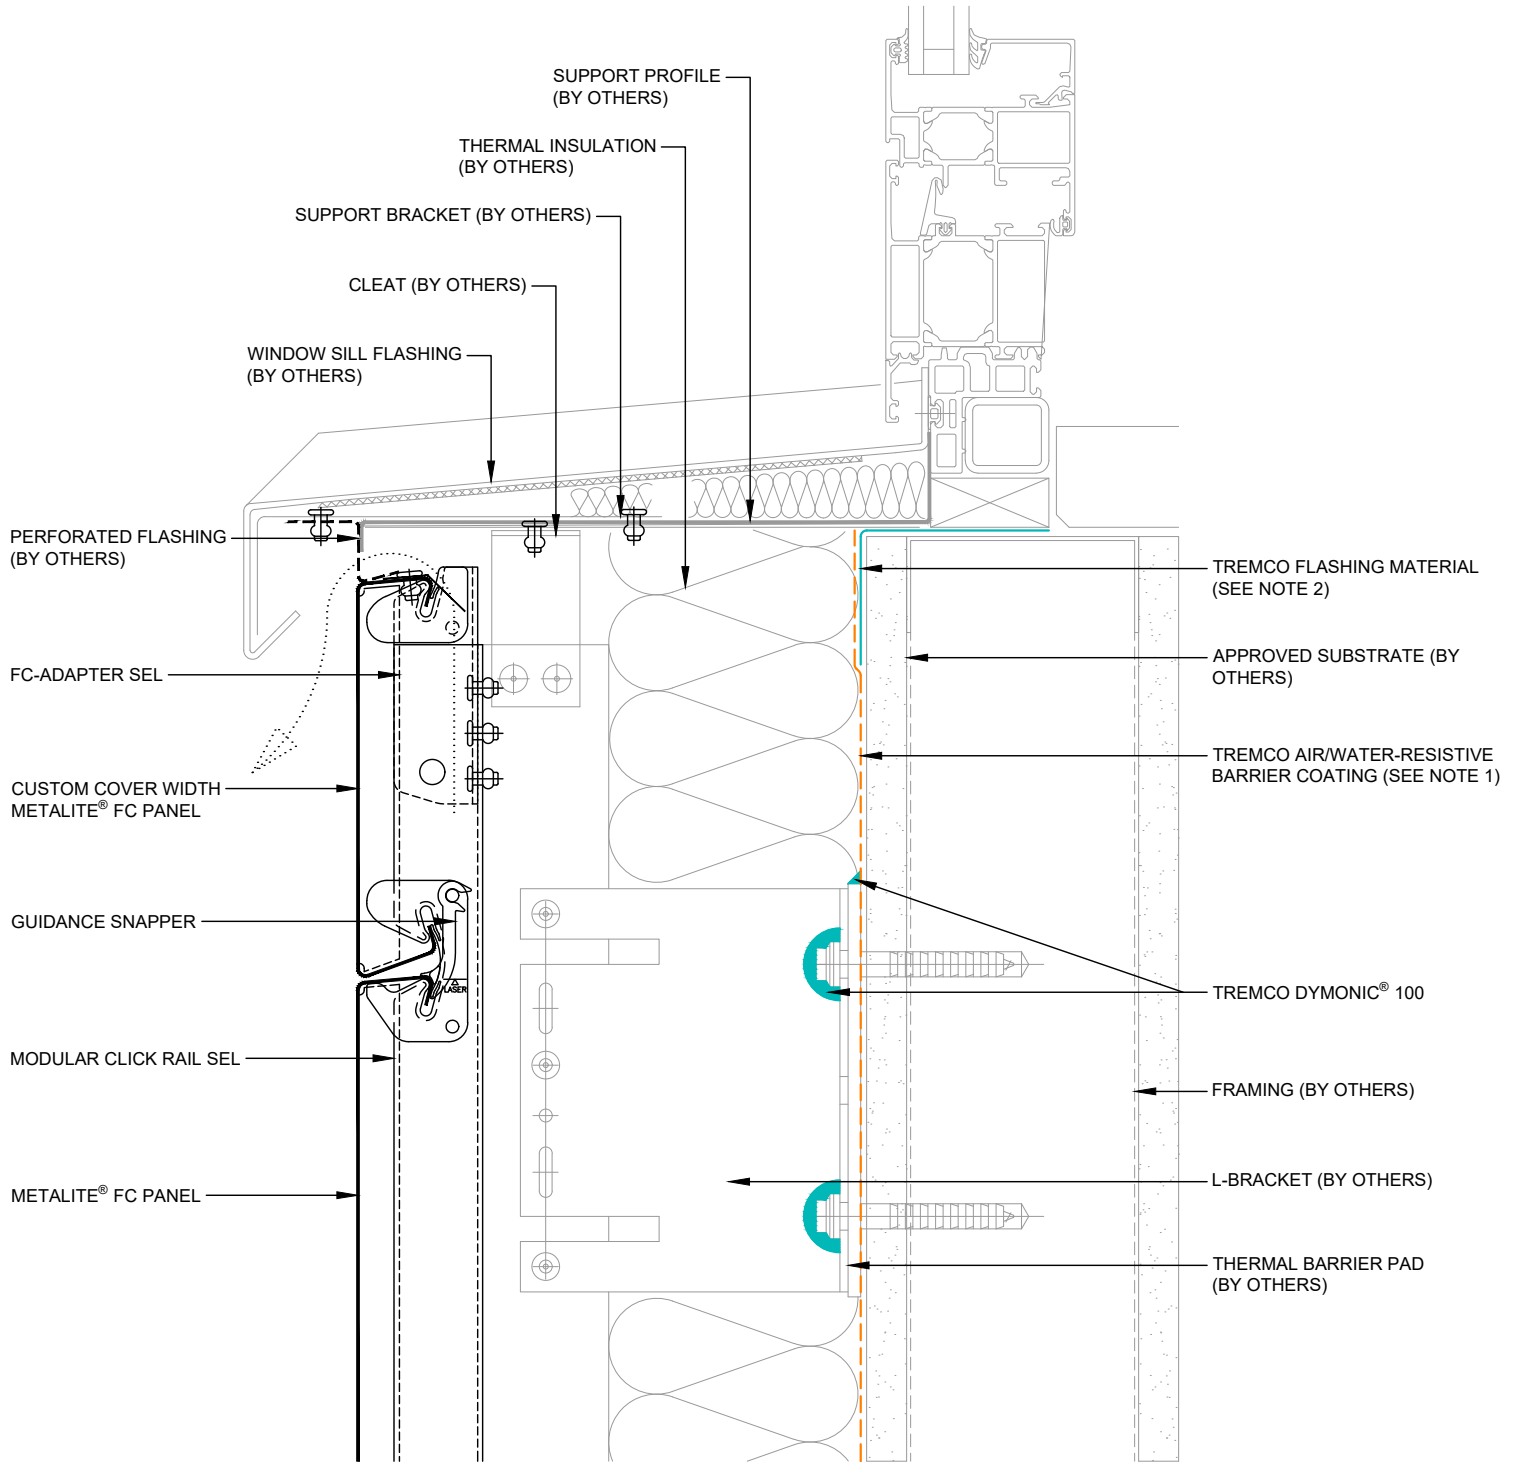

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Vertical Joint Wide - Window Sill

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Revision #: 00

Revised by: NA

Scale: 4" = 1'-0"

Date: 8/14/2026


www.tremcocpg.com

File Name:

3-B 104



Construction Products Group

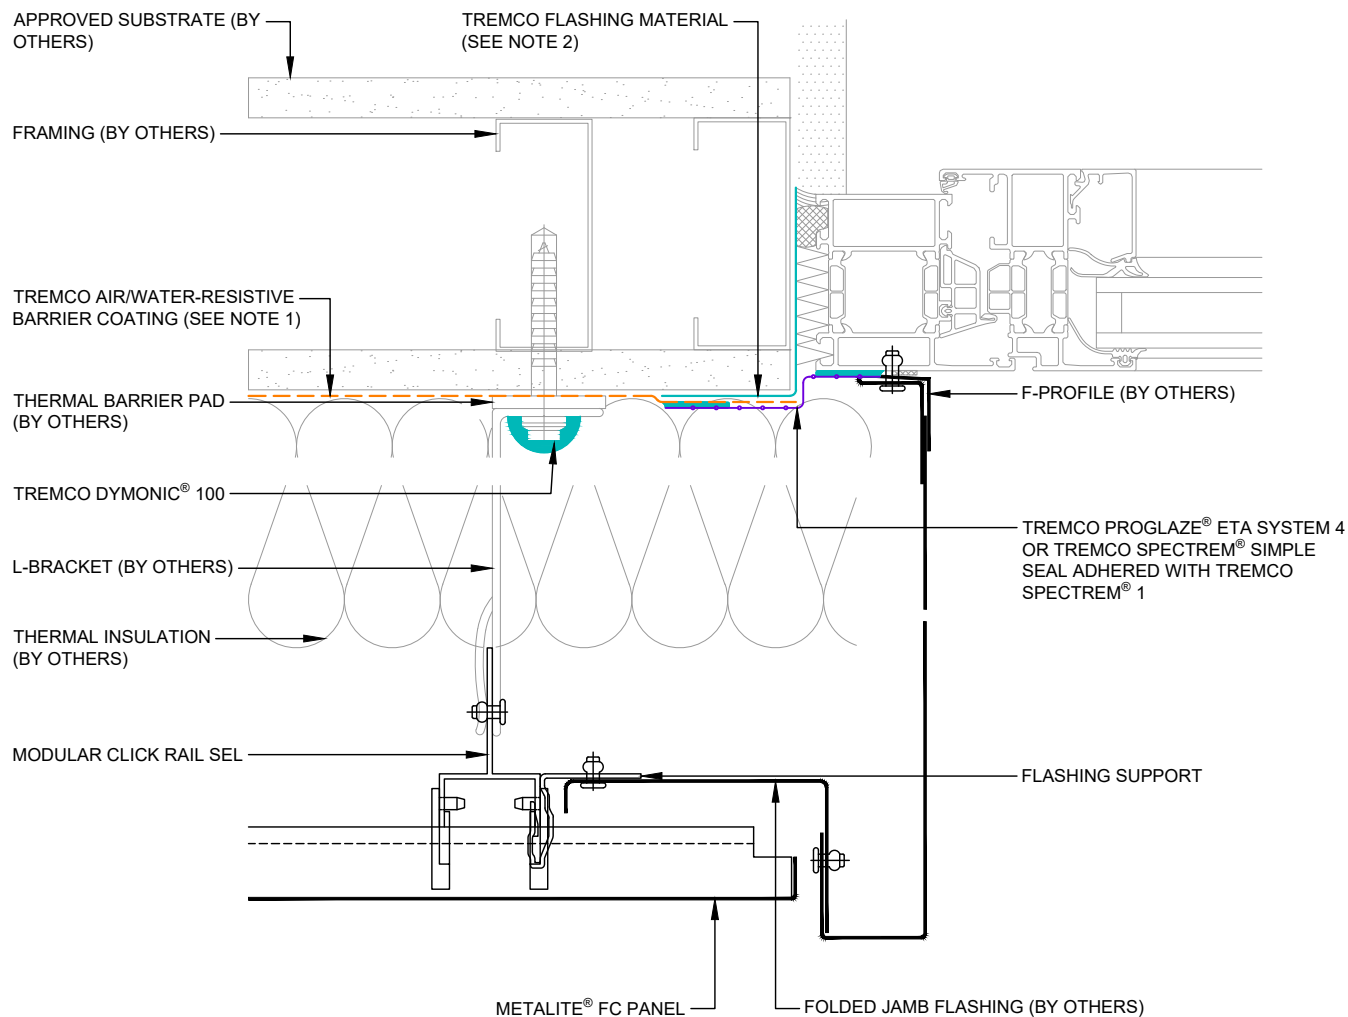

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Vertical Joint Wide - Window Jamb

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Scale: 4" = 1'-0"

Revision #: 00

Revised by: NA

Date: 8/14/2026


www.tremcocpg.com

File Name:

3-B 105



Construction Products Group

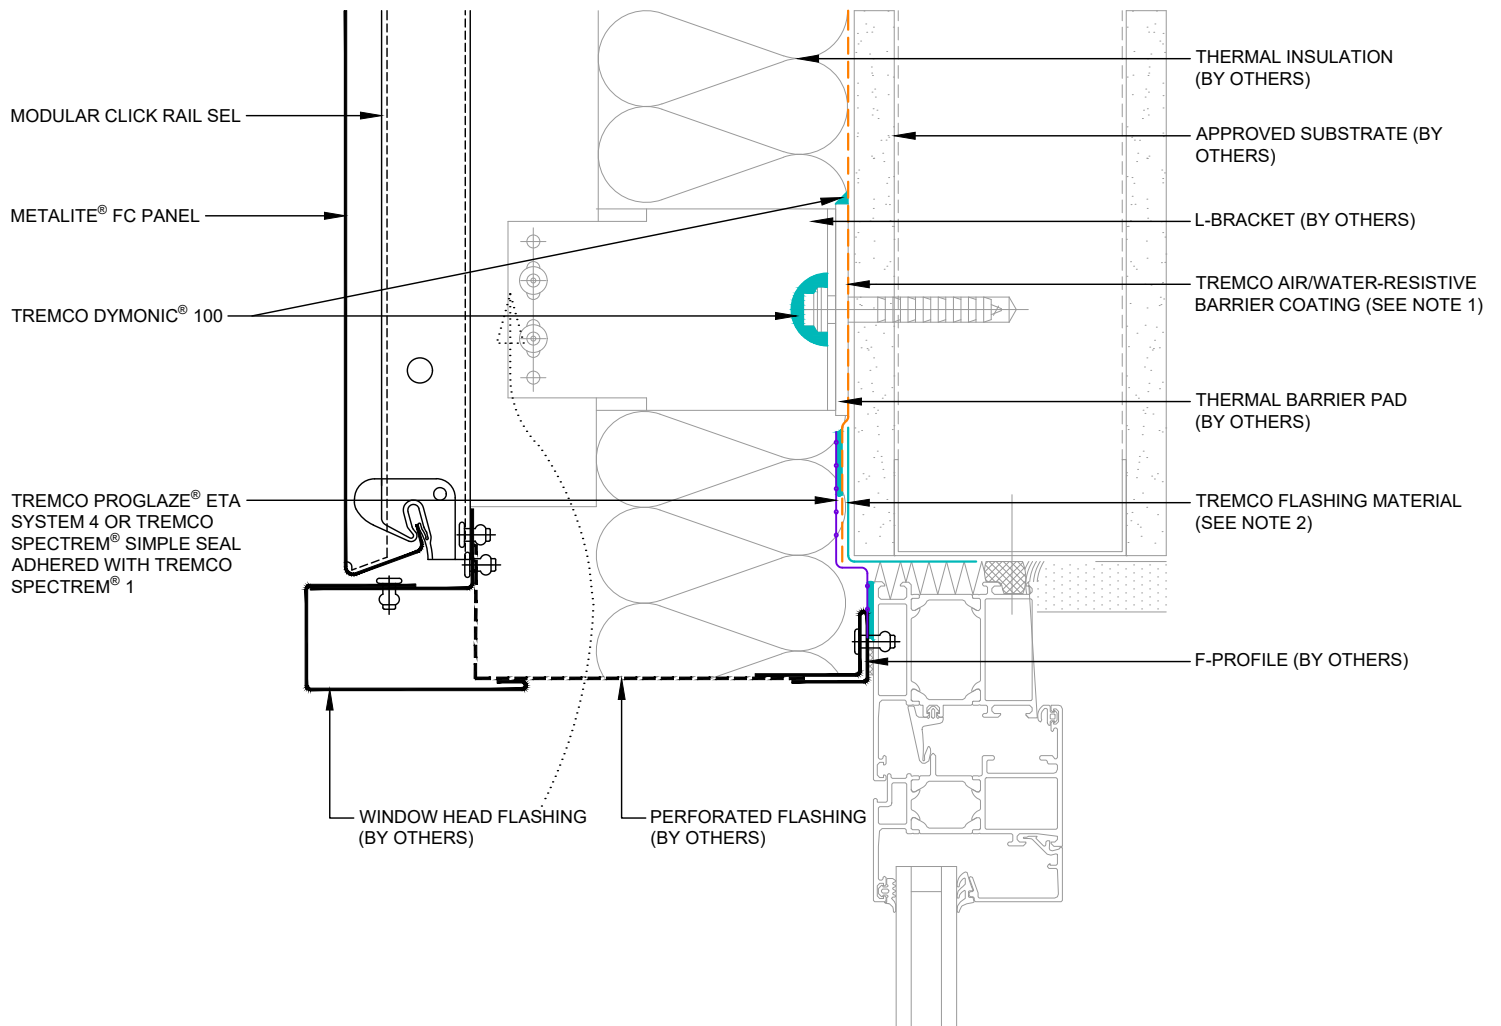

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Vertical Joint Wide - Window Head - Option 1

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Revision #: 00

Revised by: NA

Scale: 4" = 1'-0"

Date: 8/14/2026


www.tremcocpg.com

File Name:

3-B 106



Construction Products Group

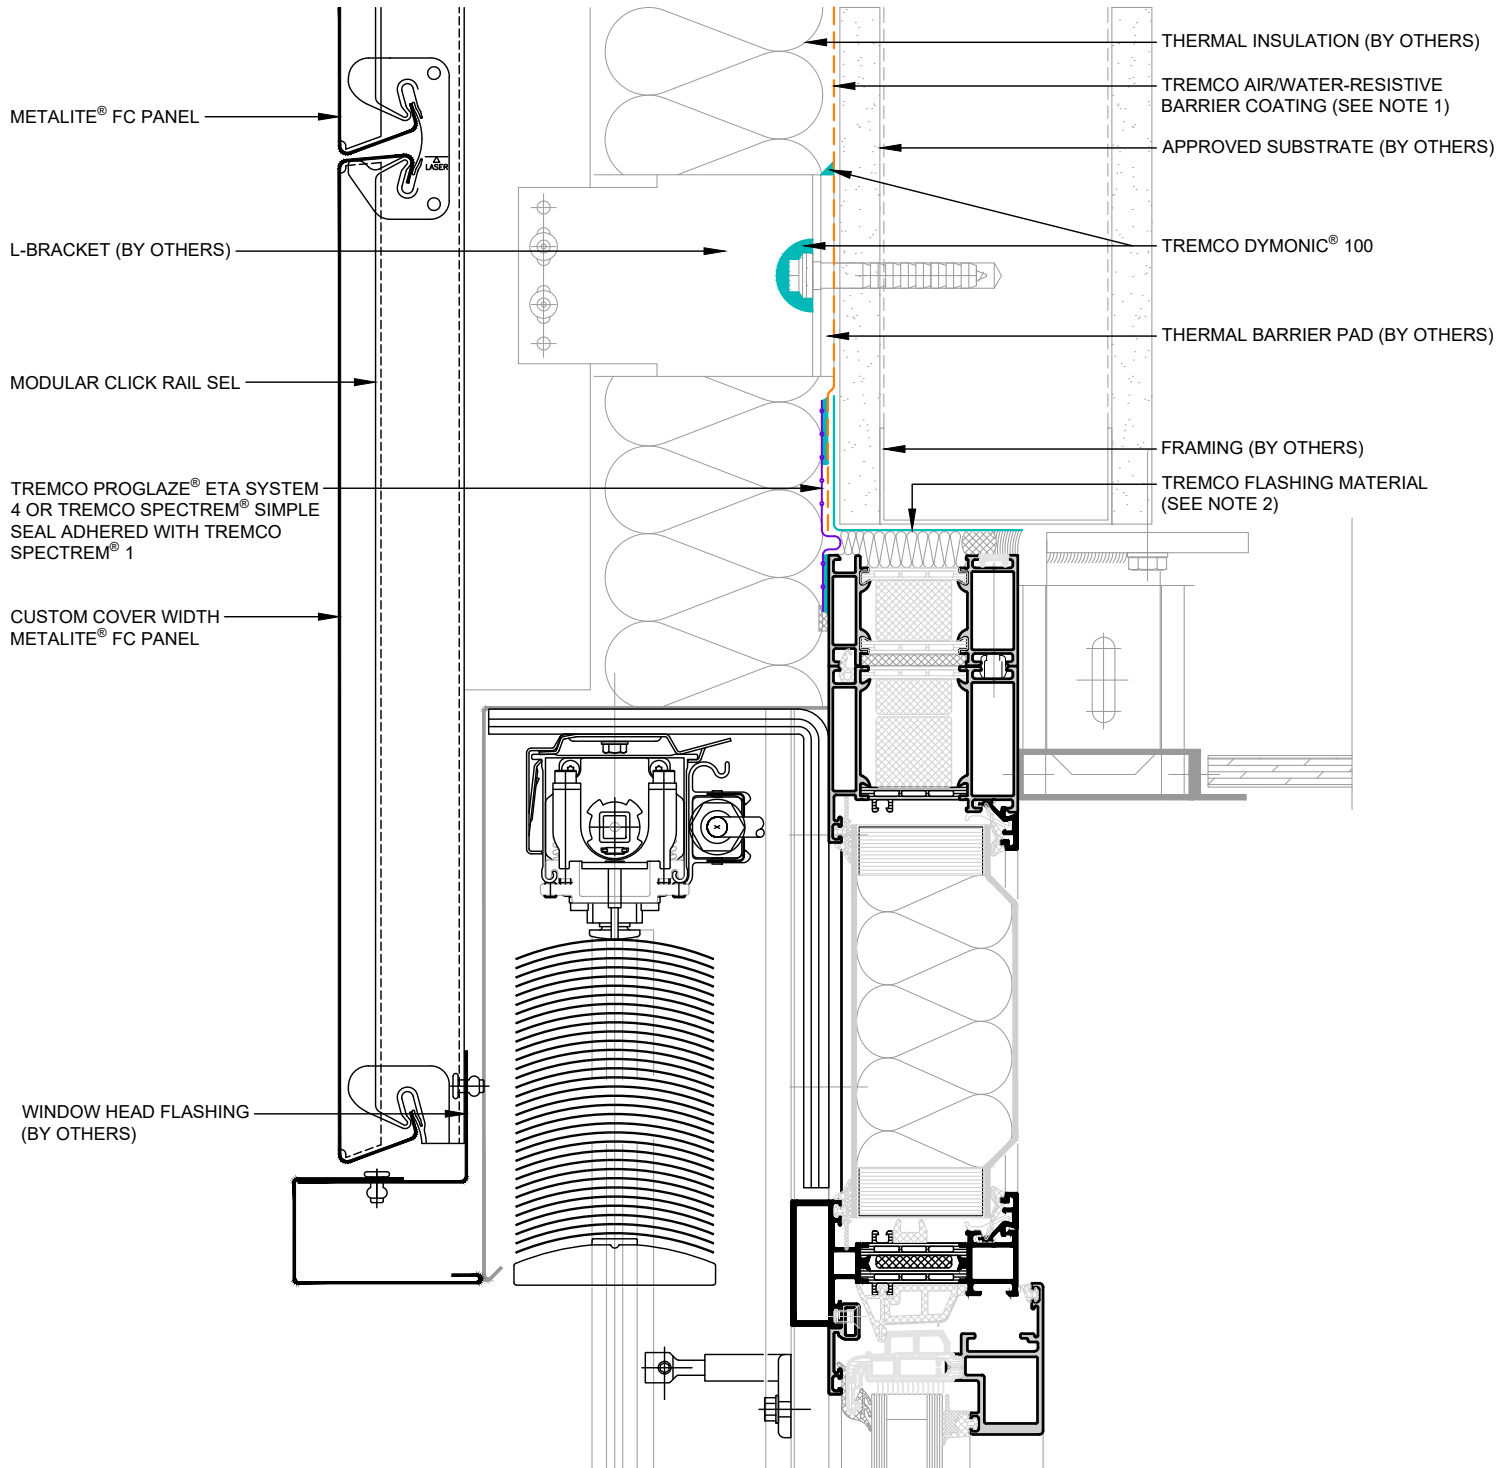

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands

Detail: Vertical Joint Wide - Window Head - Option 2

File Name:

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Scale: 4" = 1'-0"

3-B 107

Revision #: 00

Revised by: NA

Date: 8/14/2026




Dryvit Technical Support: 800-556-7752

www.tremcocpg.com



Construction Products Group

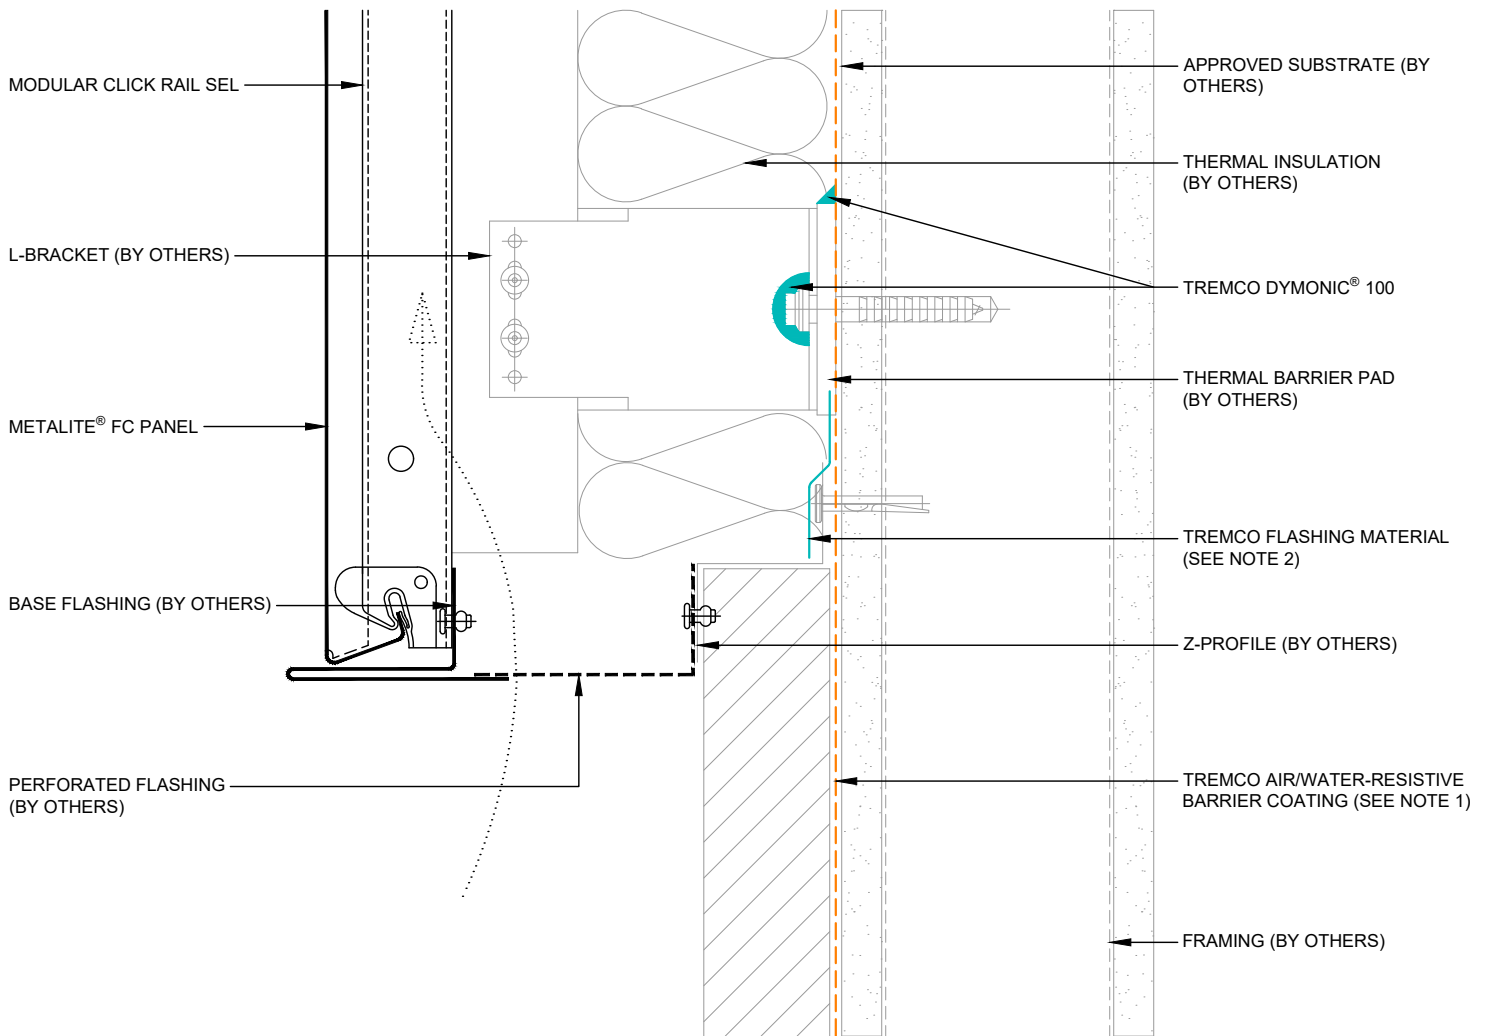


- NOTES:
1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
 2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
 3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands

 Dryvit Technical Support: 800-556-7752	Detail: Vertical Joint Wide - Base			File Name:	
	Drawn by: MSCO	Checked by: MD, MW, DV, AM	Scale: 4" = 1'-0"	3-B 108	
	Revision #: 00	Revised by: NA	Date: 8/14/2026		
	www.tremcocpg.com			 Construction Products Group	

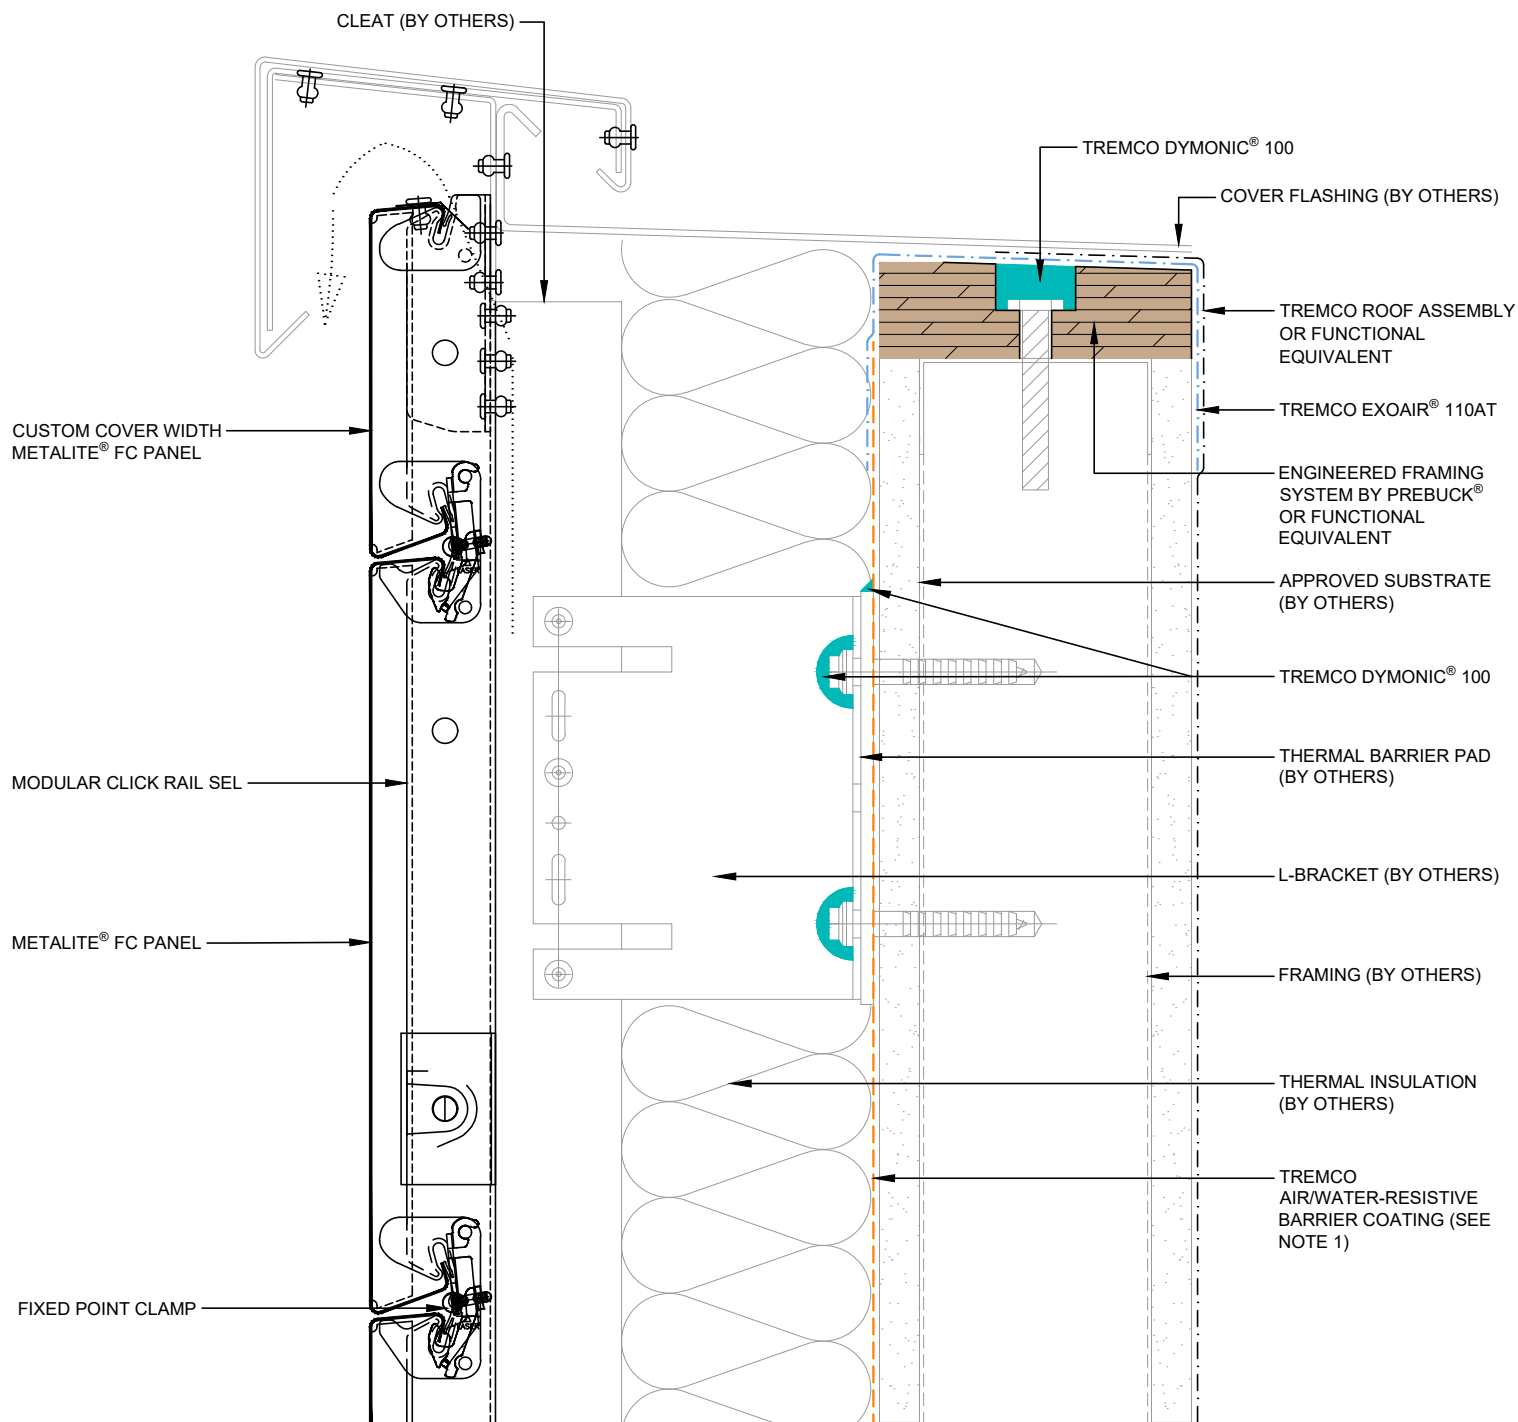

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Vertical Joint Wide - Parapet

Drawn by: MSCO

Checked by: MD, MW, DV, AM

Scale: 4" = 1'-0"

Revision #: 00

Revised by: NA

Date: 8/14/2026


www.tremcocpg.com

File Name:

3-B 109



Construction Products Group

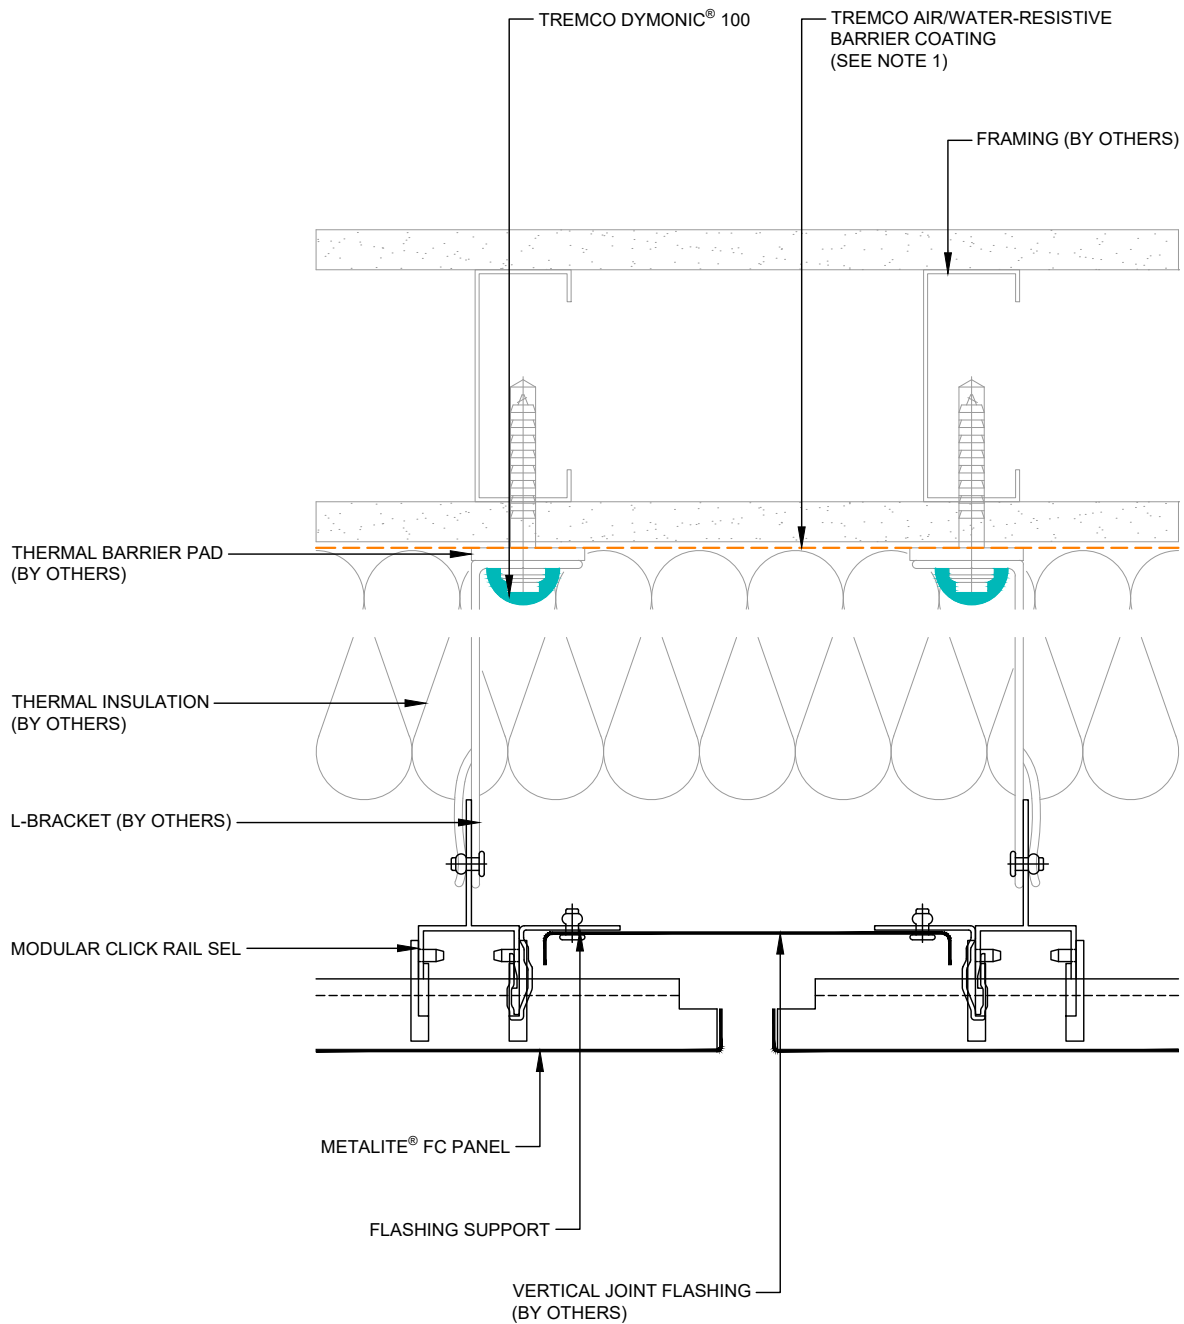

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Butt Joint - System Configuration

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Scale: 4" = 1'-0"

Revision #: 00

Revised by: NA

Date: 8/14/2026


www.tremcocpg.com

File Name:

3-C 101



Construction Products Group

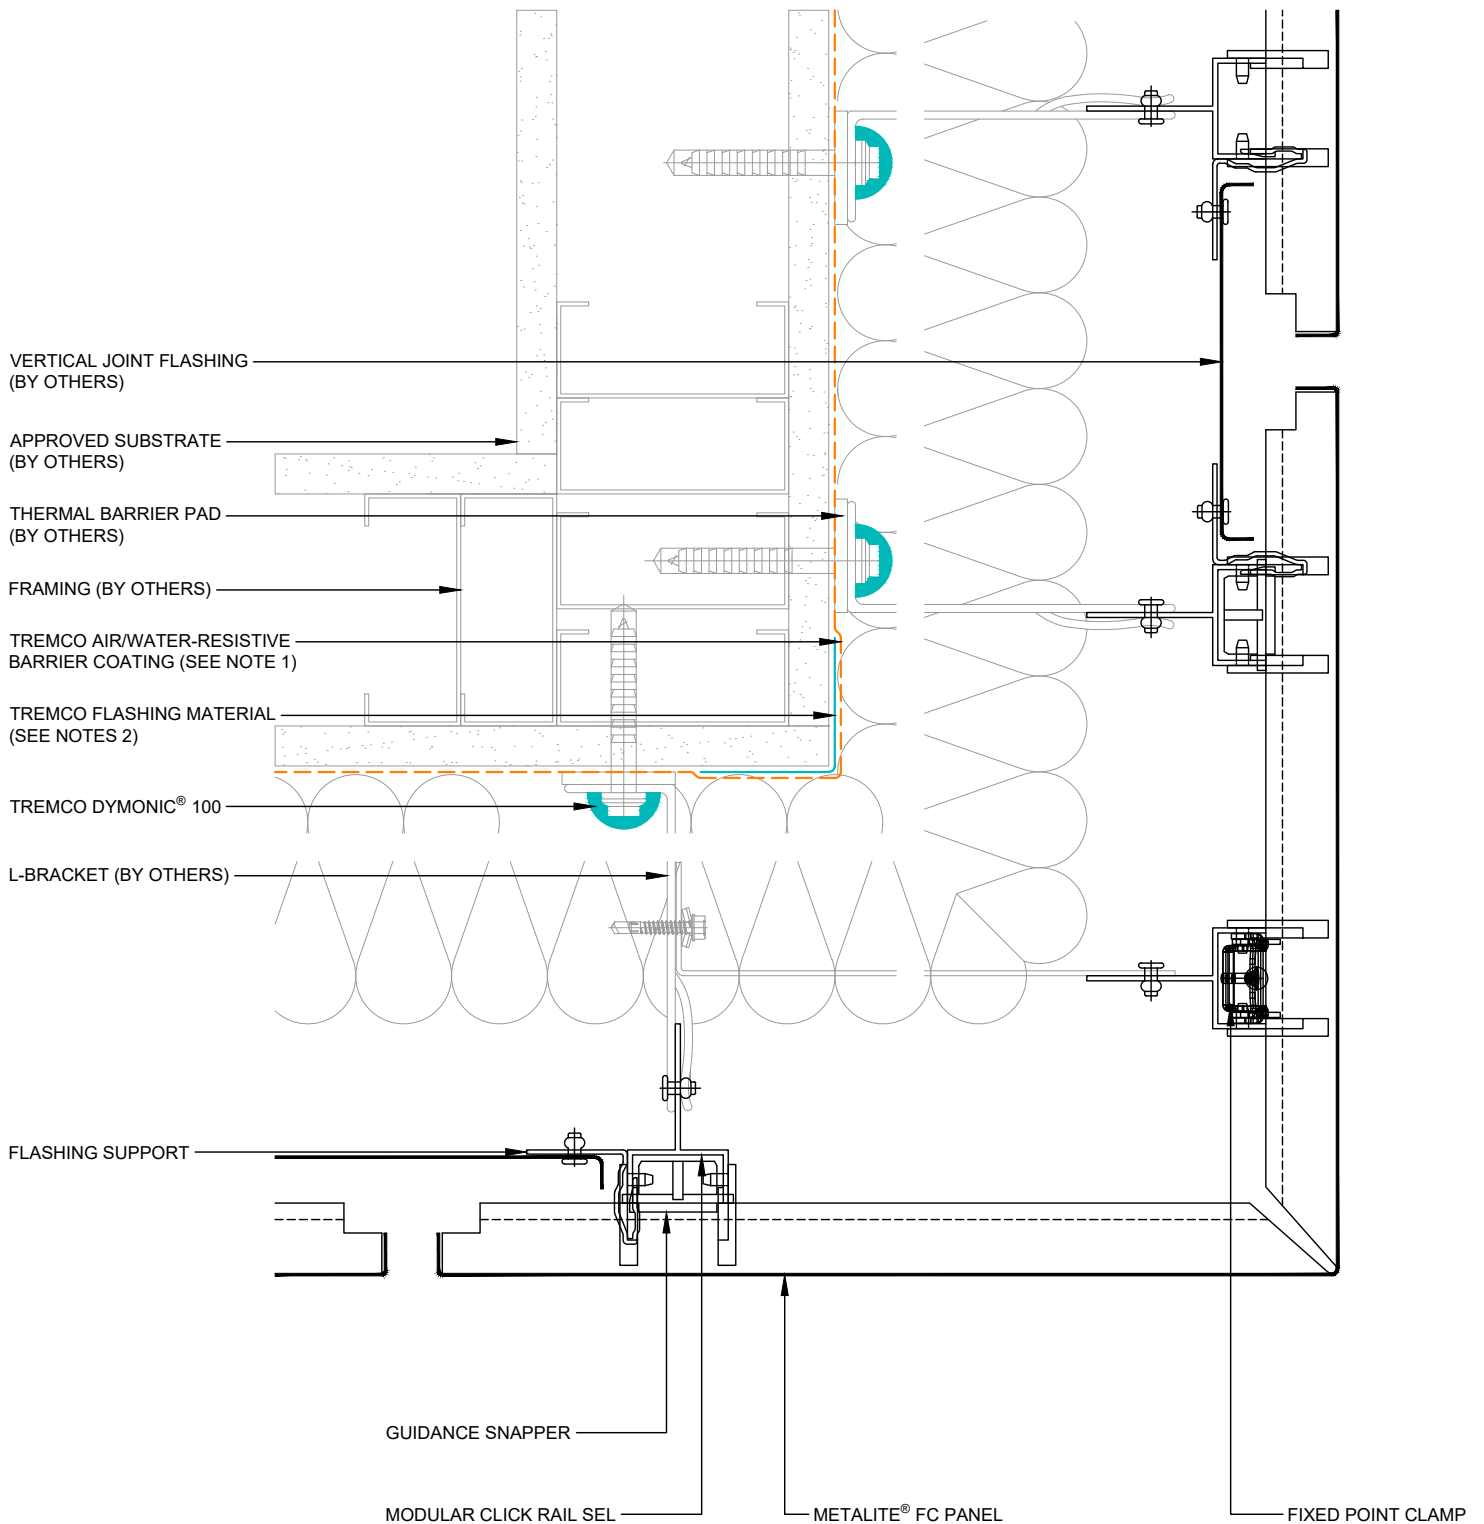

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands

Detail: Butt Joint - External Corner (90°)

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Scale: 4" = 1'-0"

Revision #: 00

Revised by: NA

Date: 8/14/2026

File Name:


3-C 102



Dryvit Technical Support: 800-556-7752

www.tremcocpg.com



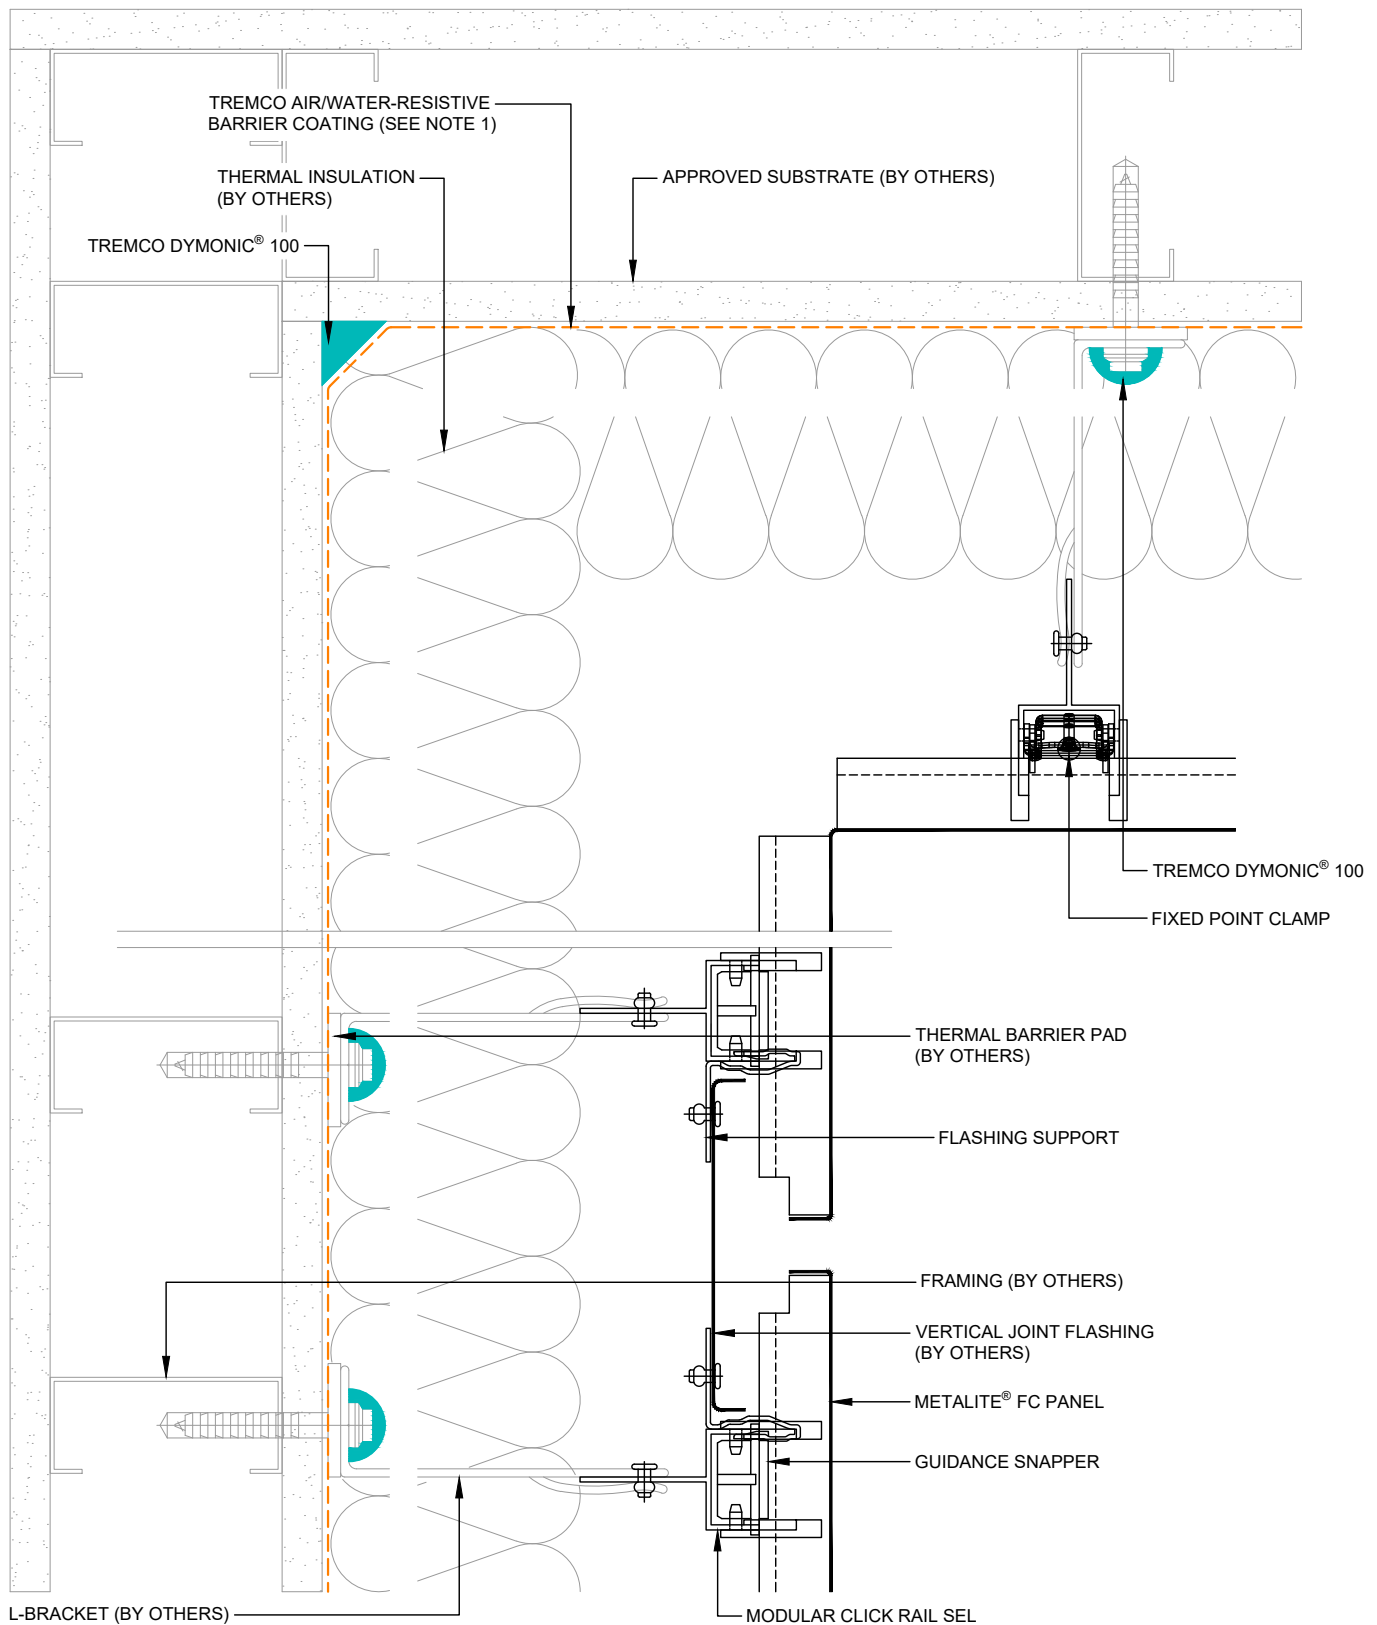

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands

Detail: Butt Joint - Internal Corner (90°)

File Name:

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Scale: 4" = 1'-0"

3-C 103

Revision #: 00

Revised by: NA

Date: 8/14/2026


www.tremcocpg.com



Dryvit Technical Support: 800-556-7752



Construction Products Group

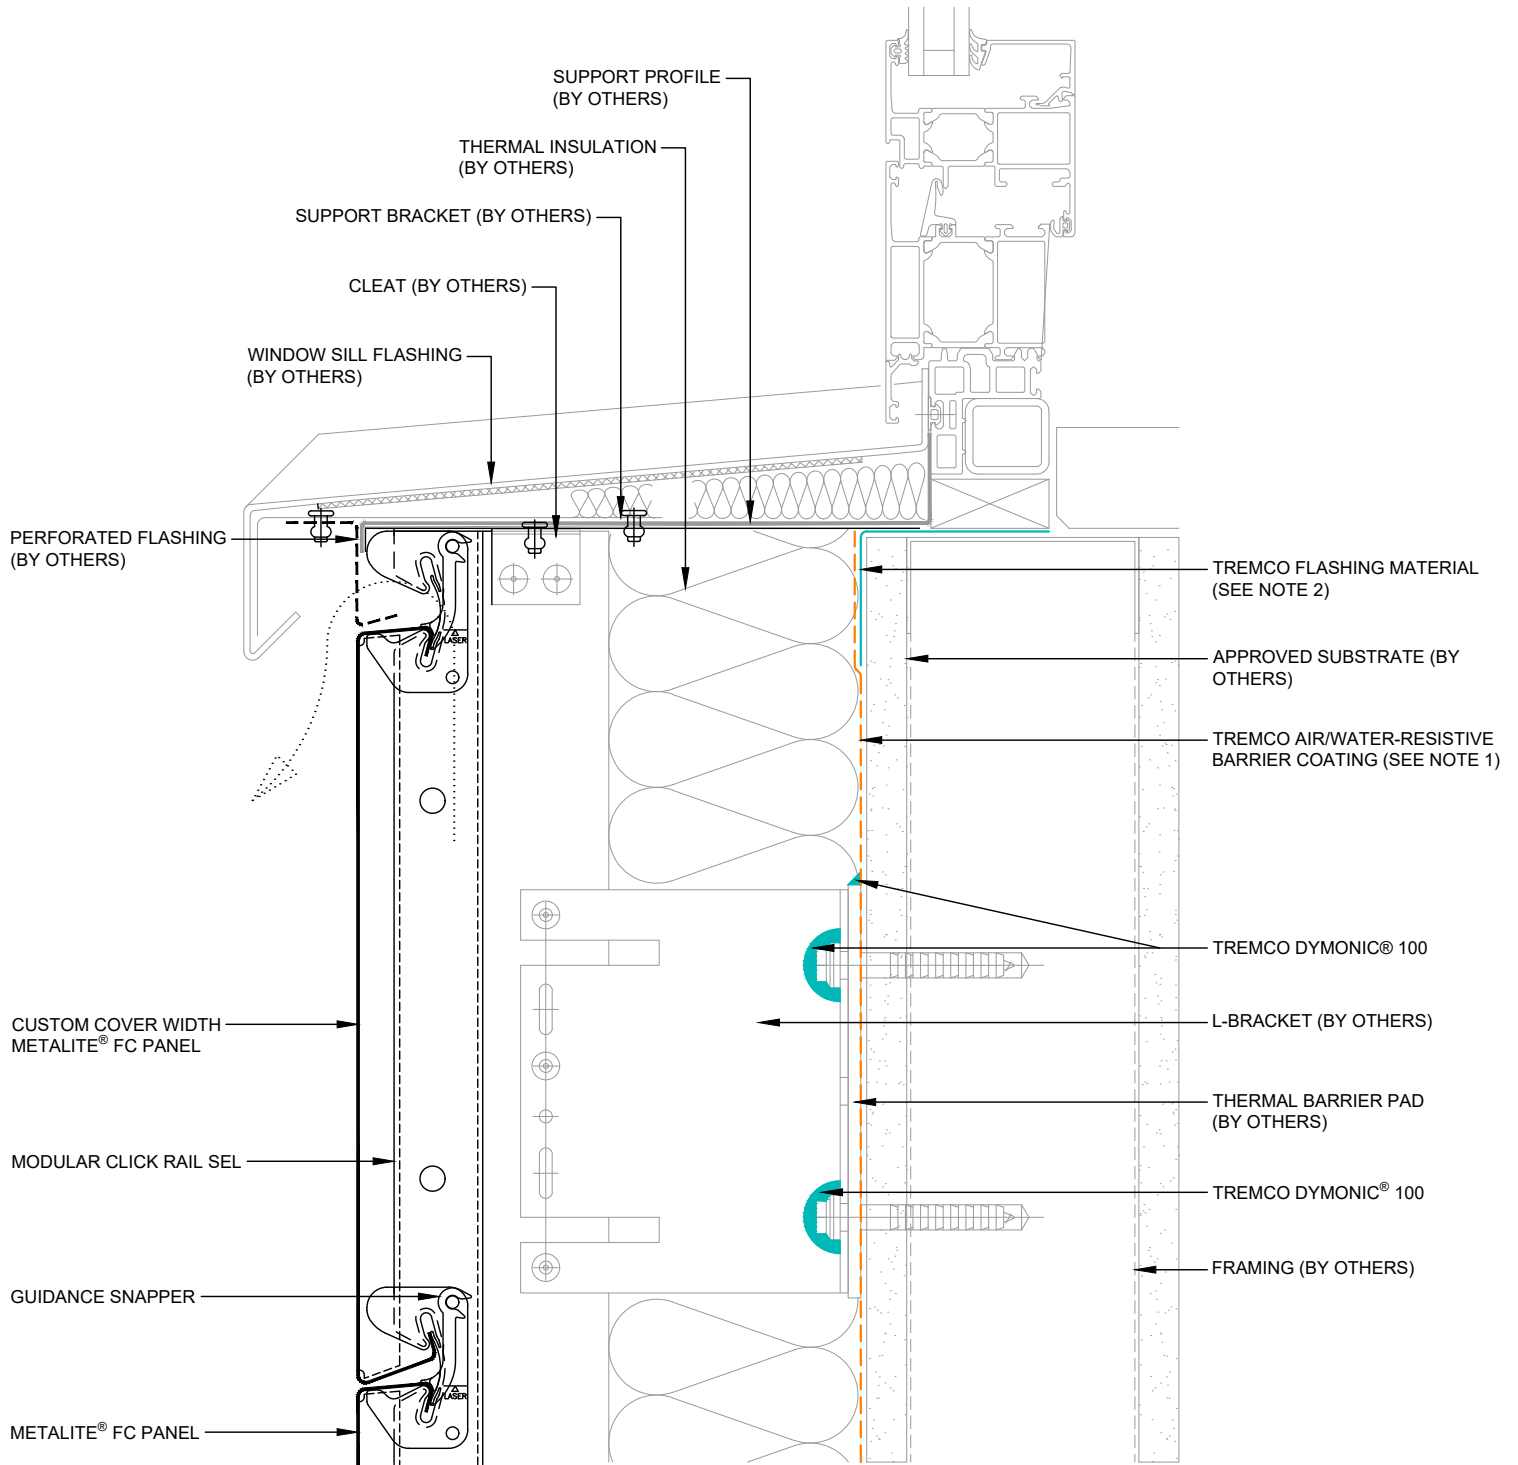

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Butt Joint - Window Sill

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Scale: 4" = 1'-0"

Revision #: 00

Revised by: NA

Date: 8/14/2026


www.tremcocpg.com

File Name:

3-C 104



Construction Products Group

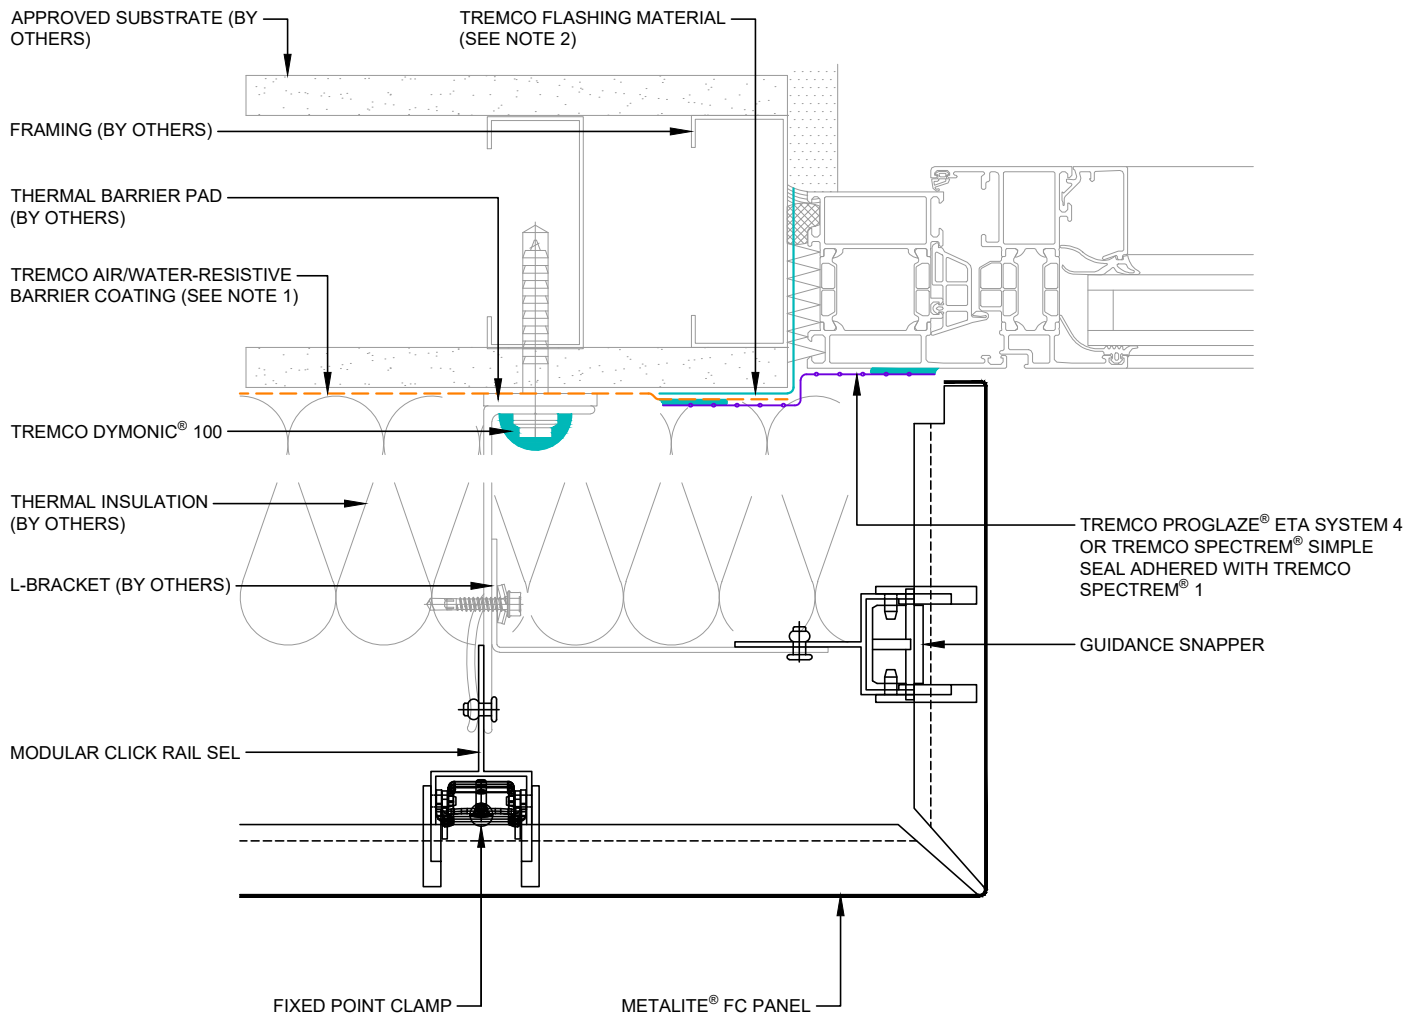

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands

Detail: Butt Joint - Window Jamb

File Name:

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Scale: 4" = 1'-0"

3-C 105

Revision #: 00

Revised by: NA

Date: 8/17/2026




Dryvit Technical Support: 800-556-7752

www.tremcocpg.com



Construction Products Group

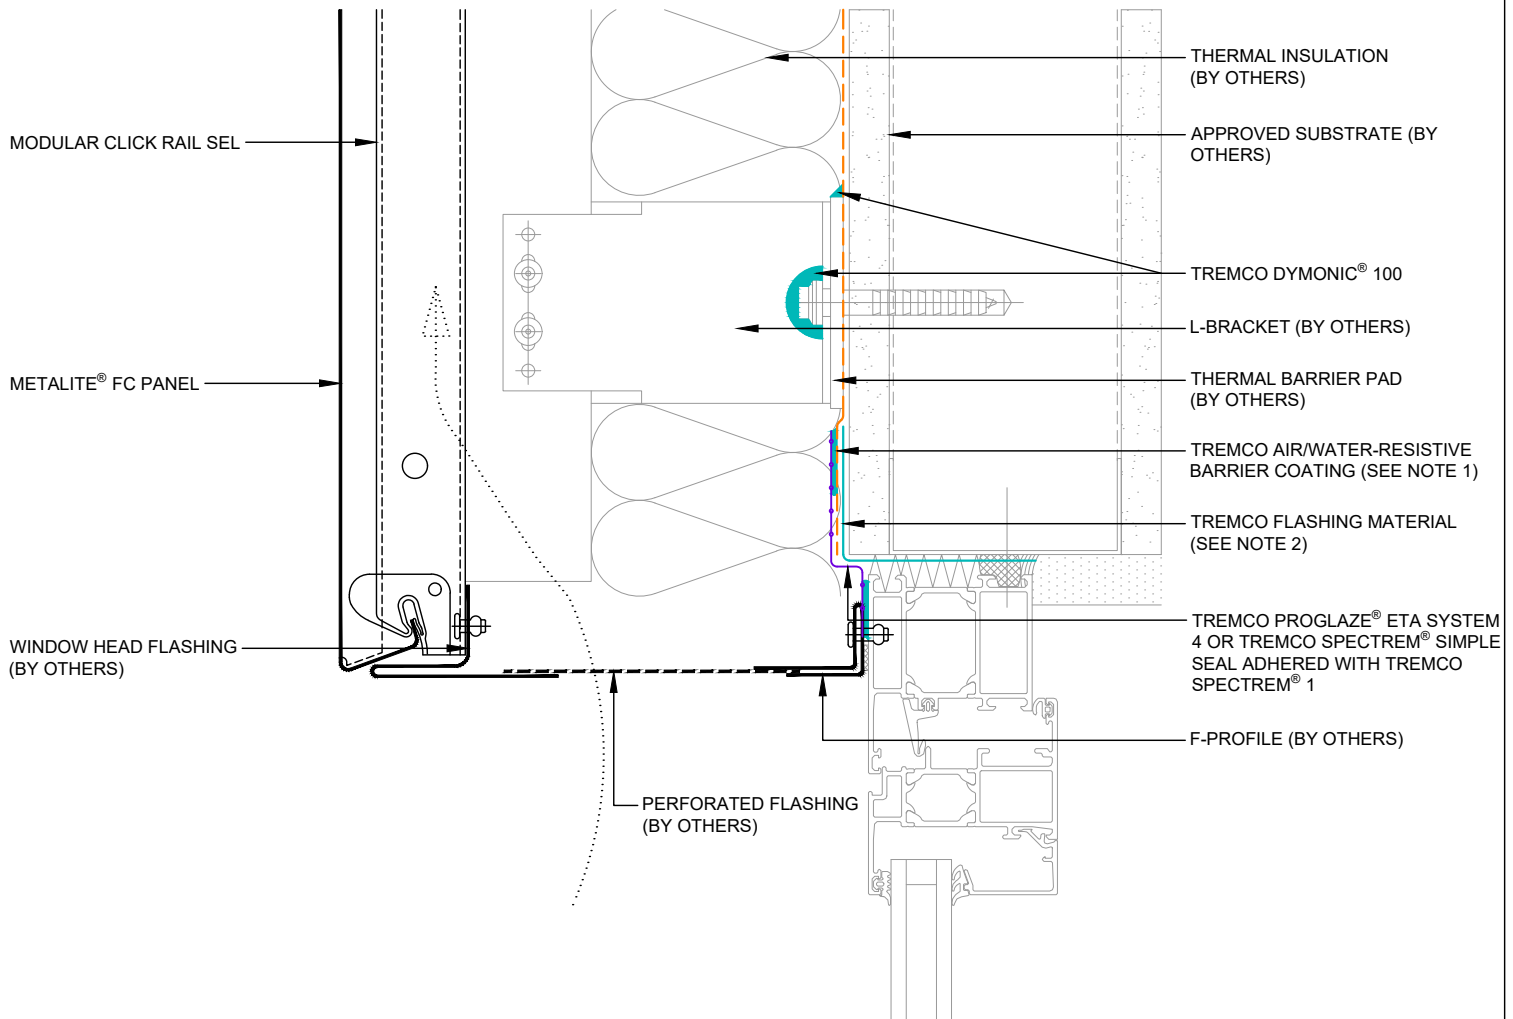

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Butt Joint - Window Head - Option 1

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Scale: 4" = 1'-0"

Revision #: 00

Revised by: NA

Date: 8/14/2026


www.tremcocpg.com

File Name:

3-C 106



Construction Products Group

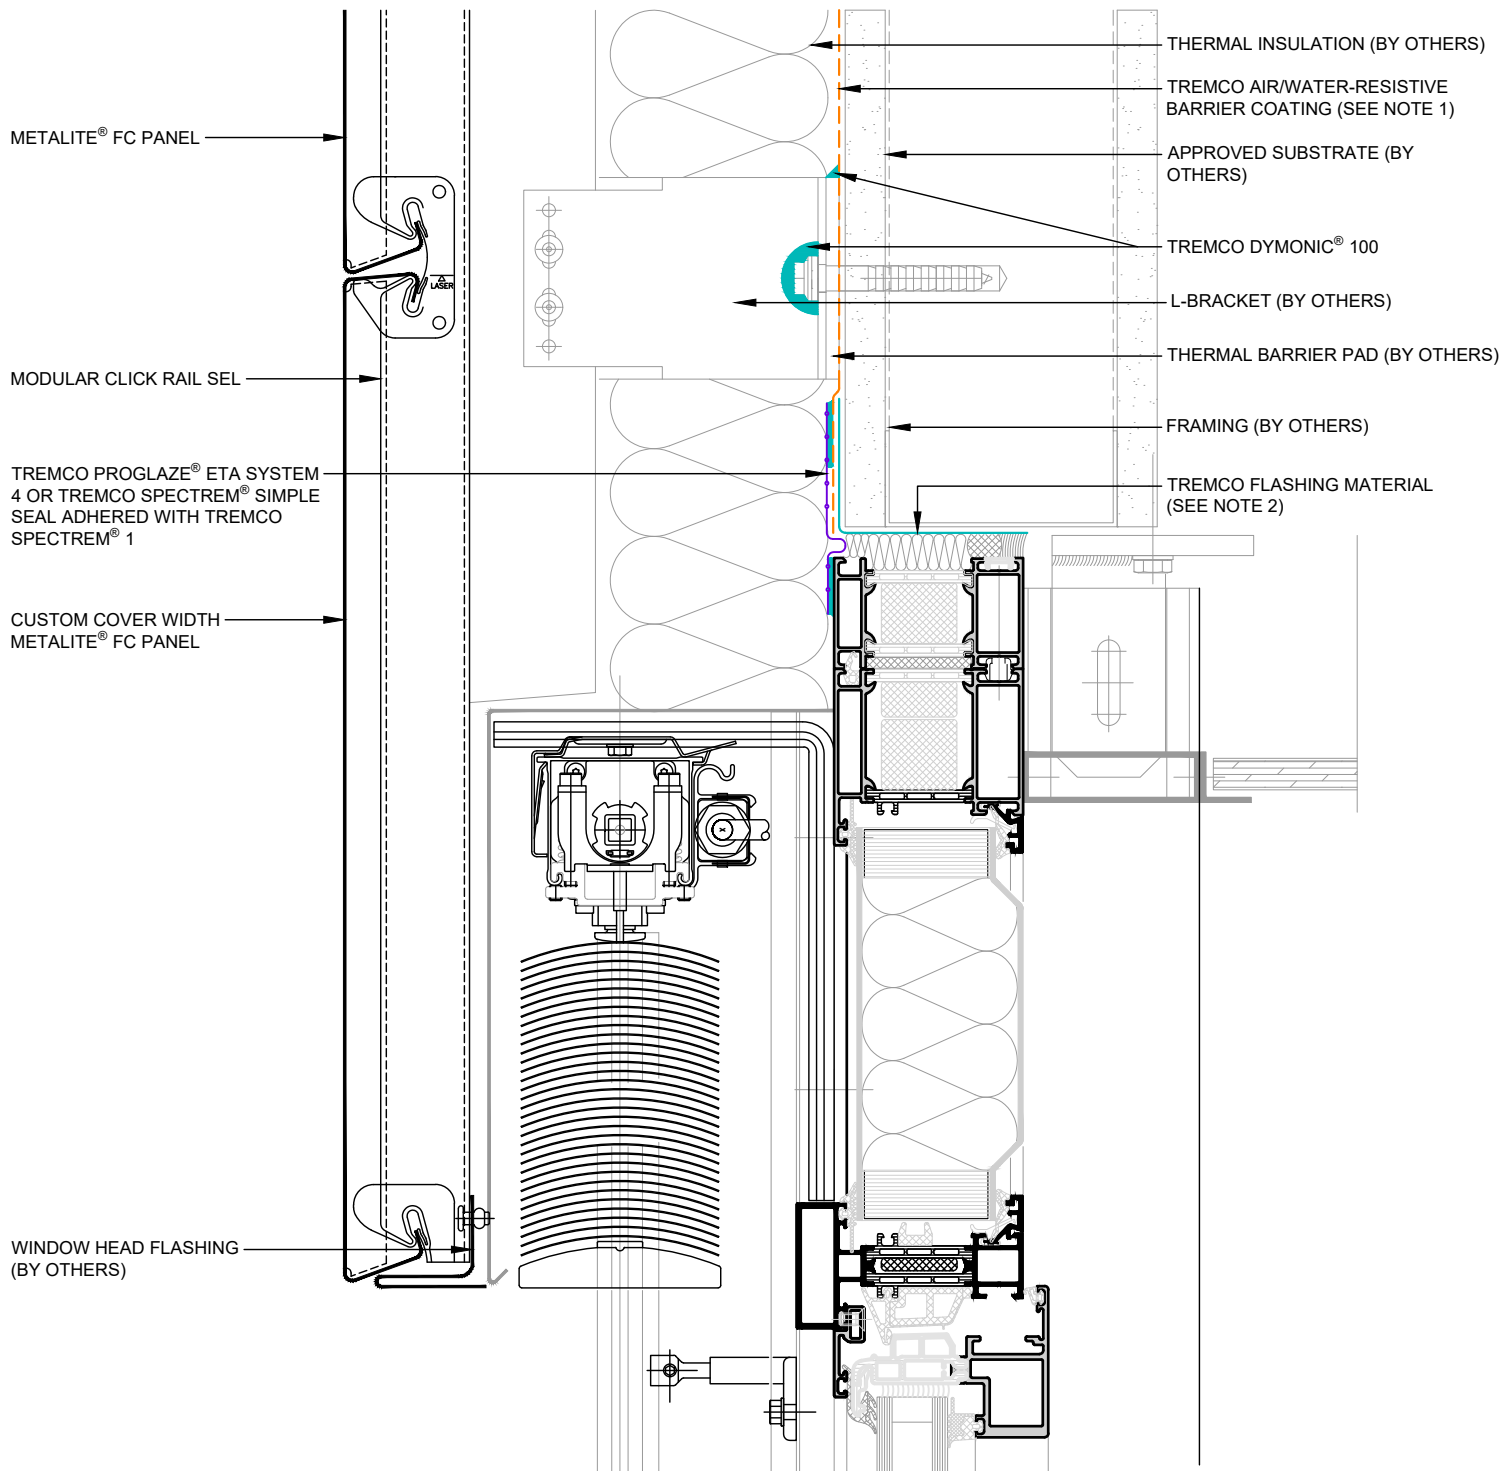

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Butt Joint - Window Head - Option 2

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Scale: 4" = 1'-0"

Revision #: 00

Revised by: NA

Date: 8/14/2026


www.tremcocpg.com

File Name:

3-C 107



Construction Products Group

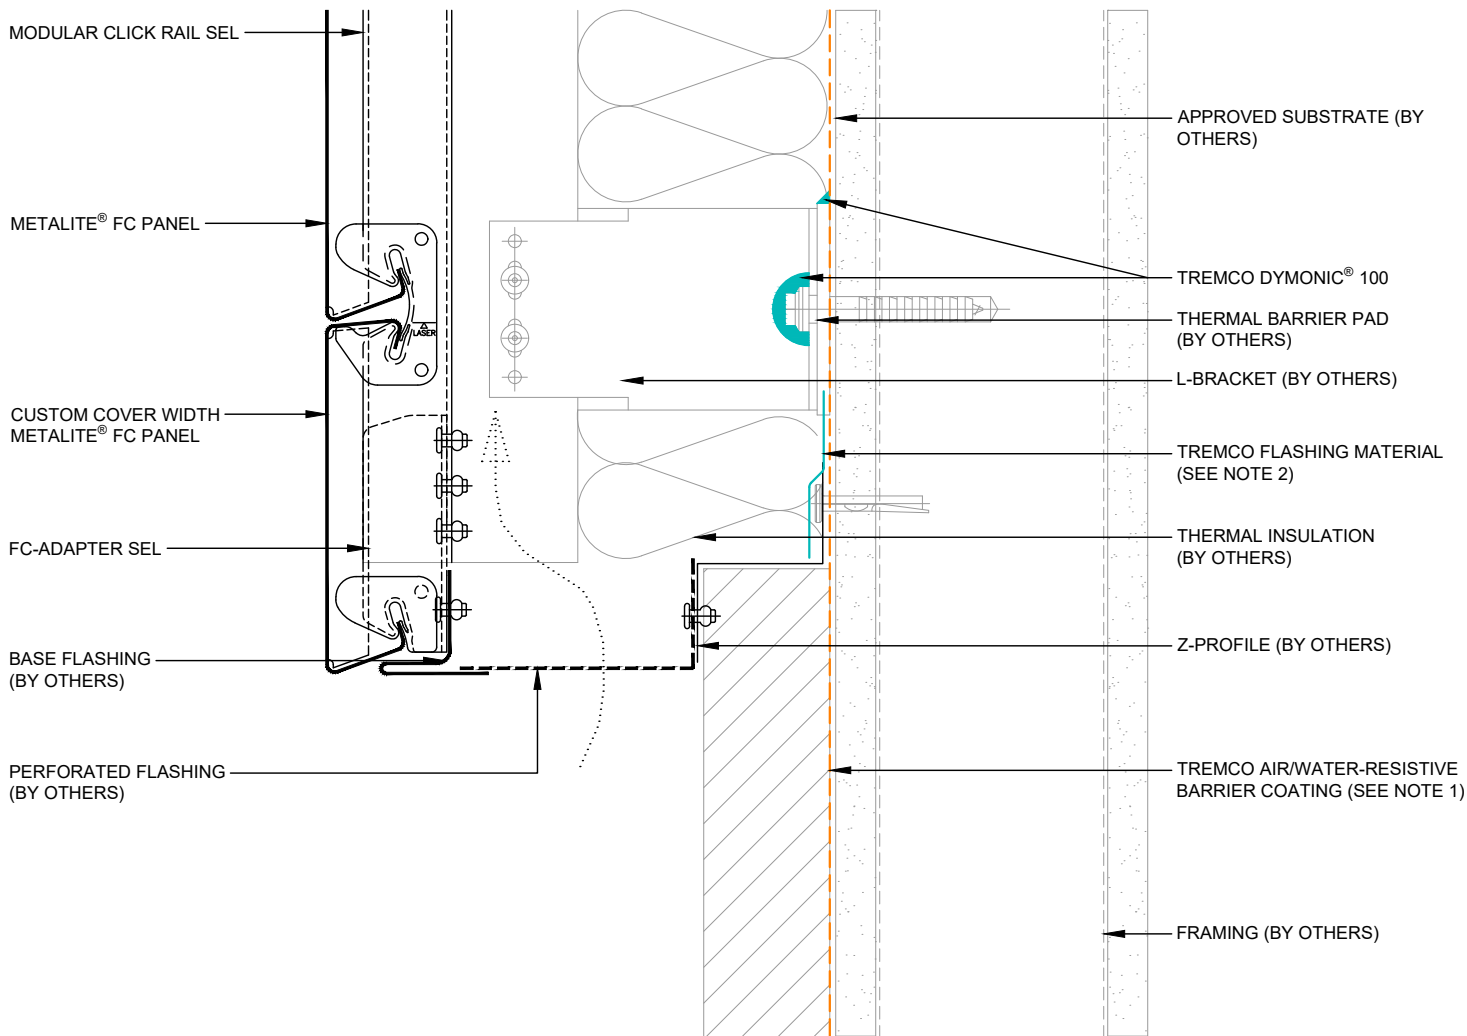

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Butt Joint - Base

Drawn by: MSCO

Revision #: 00

Checked by: MD, MW,
DV, AM

Revised by: NA

Scale: 4" = 1'-0"

Date: 8/14/2026


File Name:

3-C 108



Construction Products Group

www.tremcocpg.com

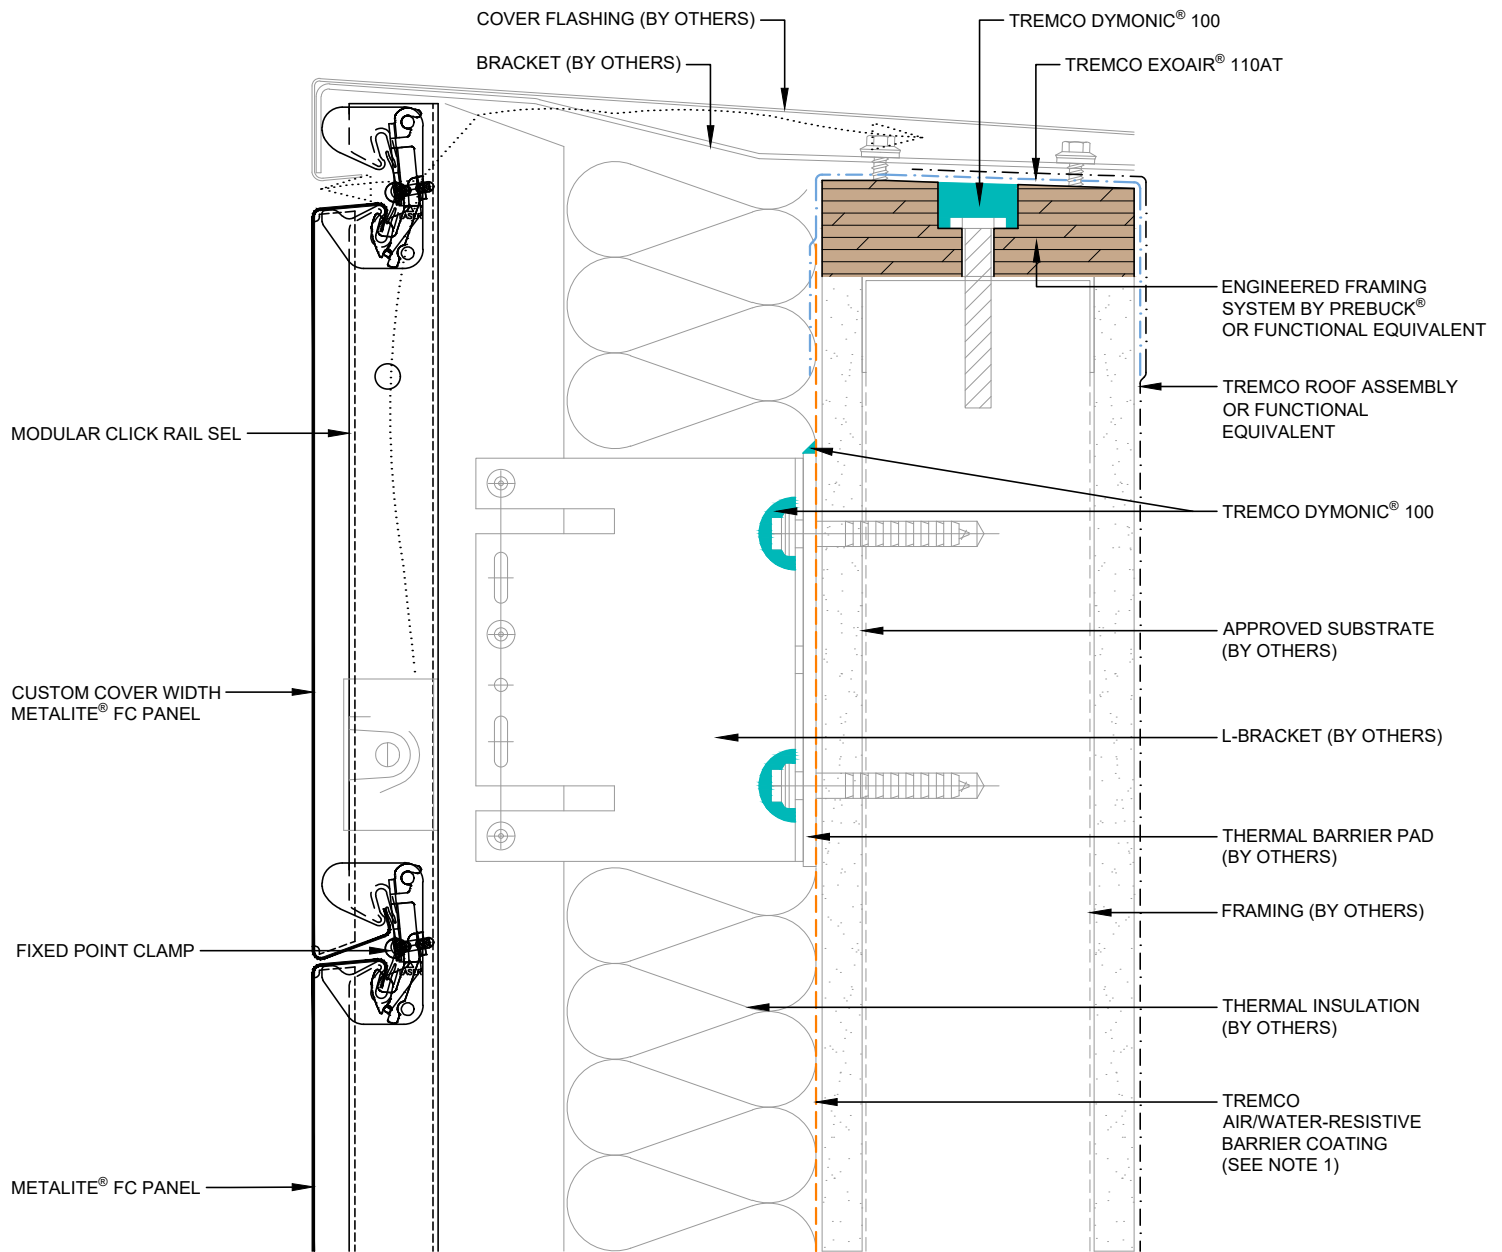

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands

Detail: Butt Joint - Parapet

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Scale: 4" = 1'-0"

Revision #: 00

Revised by: NA

Date: 8/17/2026

File Name:

3-C 109




Dryvit Technical Support: 800-556-7752

www.tremcocpg.com



Construction Products Group

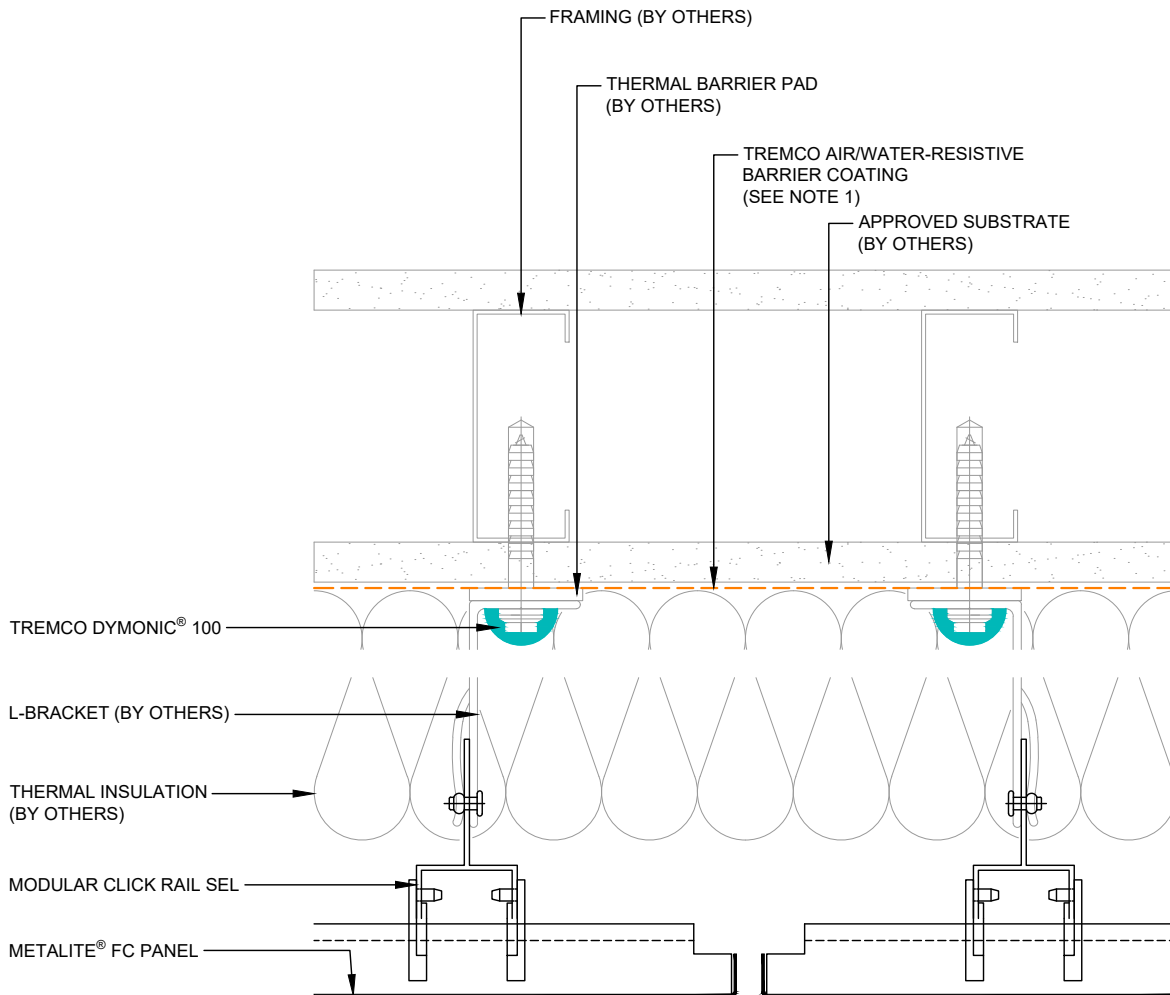

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Fitted Joint - System Configuration

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Scale: 4" = 1'-0"

Revision #: 00

Revised by: NA

Date: 8/14/2026


www.tremcocpg.com

File Name:

3-D 101



Construction Products Group

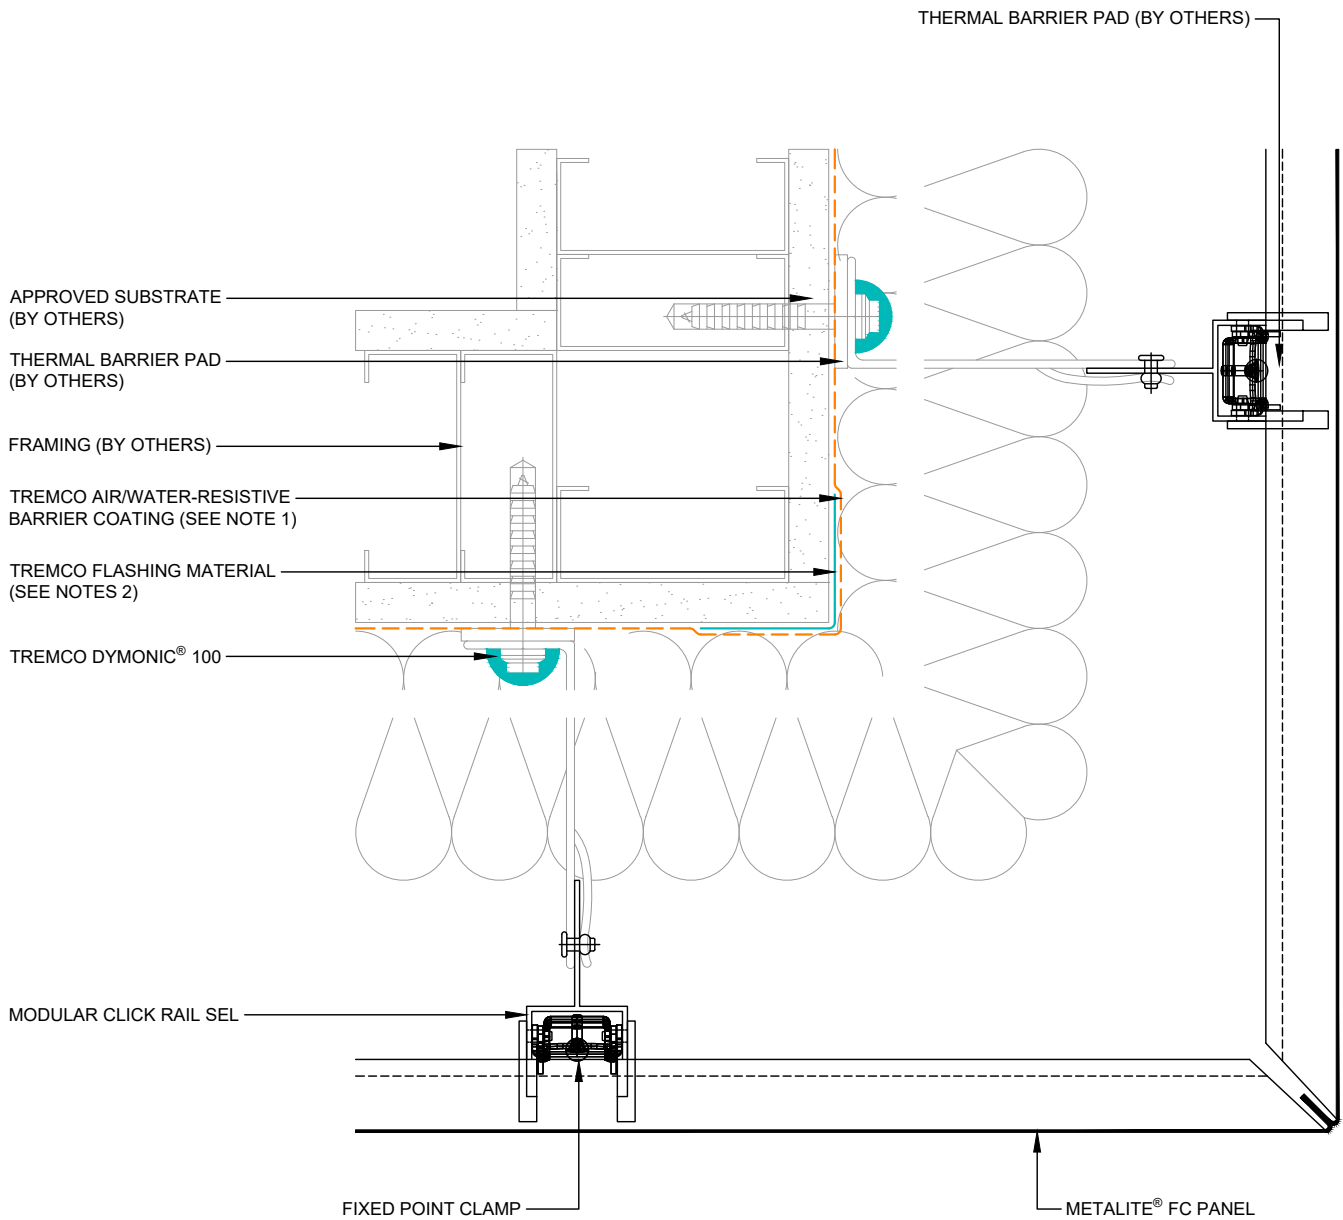

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Fitted Joint - External Corner (90°)

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Scale: 4" = 1'-0"

Revision #: 00

Revised by: NA

Date: 8/14/2026


www.tremcocpg.com

File Name:

3-D 102



Construction Products Group

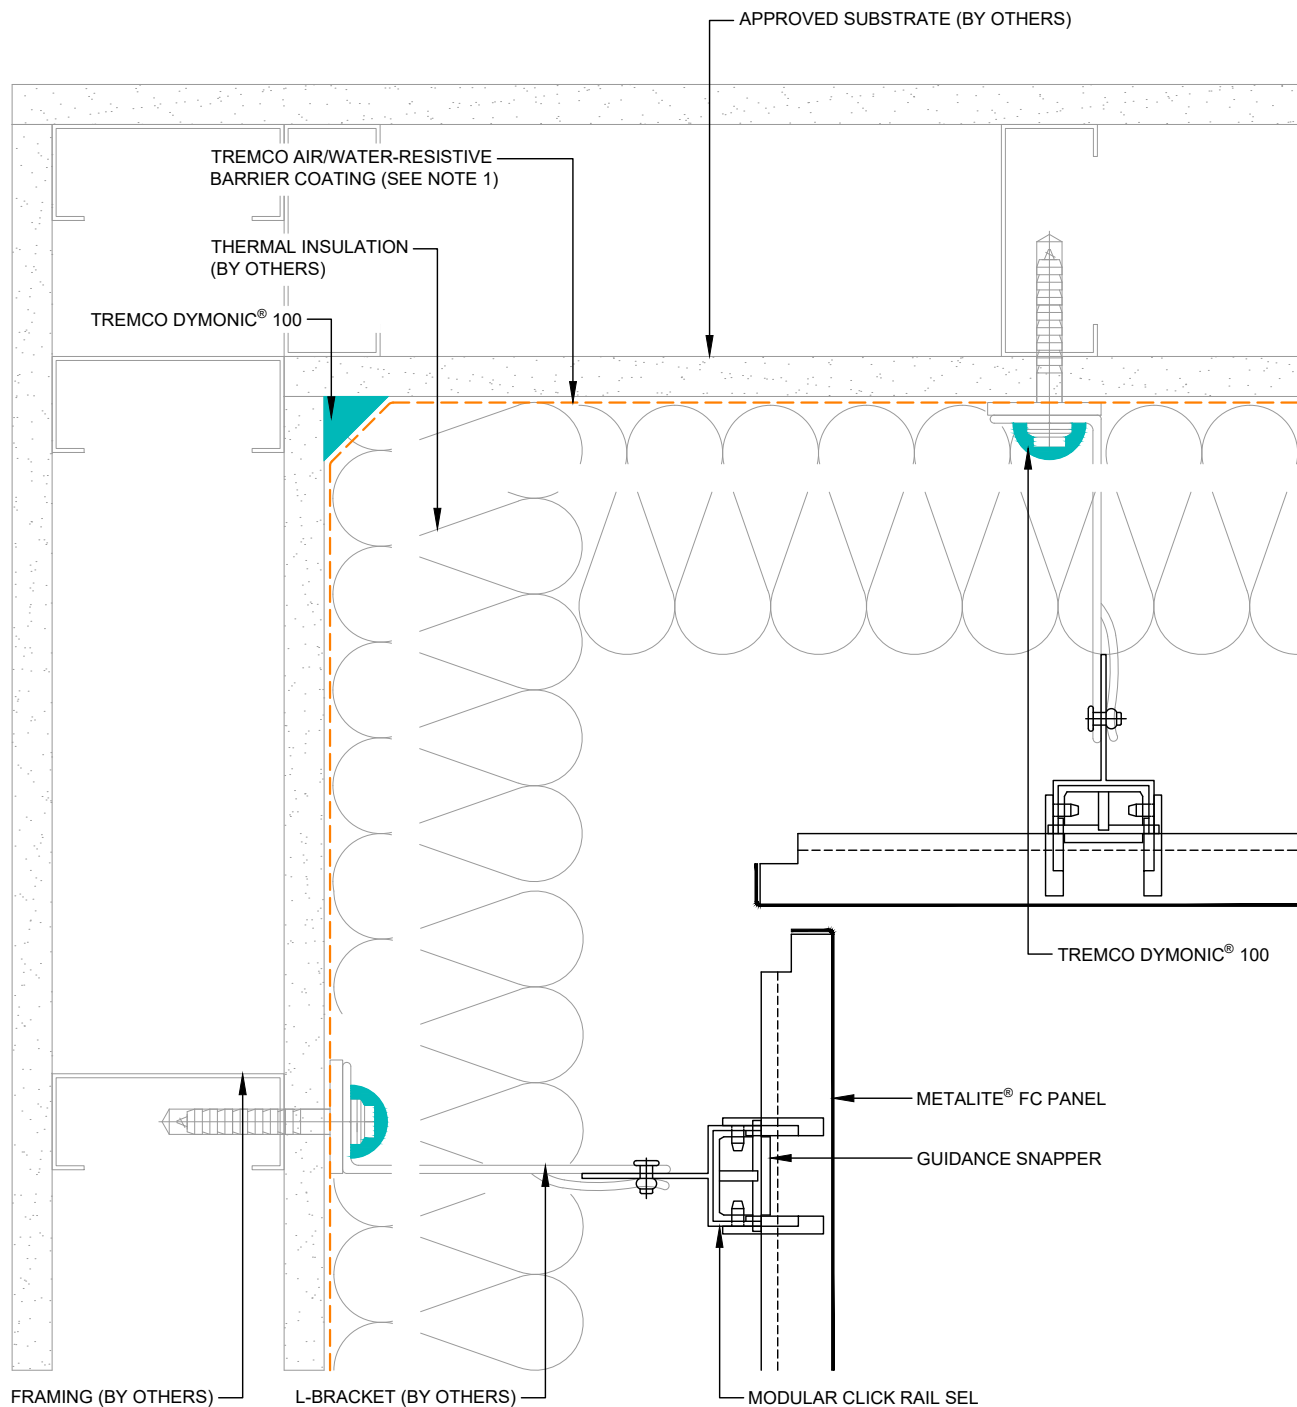

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Fitted Joint - Internal Corner (90°)

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Scale: 4" = 1'-0"

Revision #: 00

Revised by: NA

Date: 8/14/2026


www.tremcocpg.com

File Name:

3-D 103



Construction Products Group

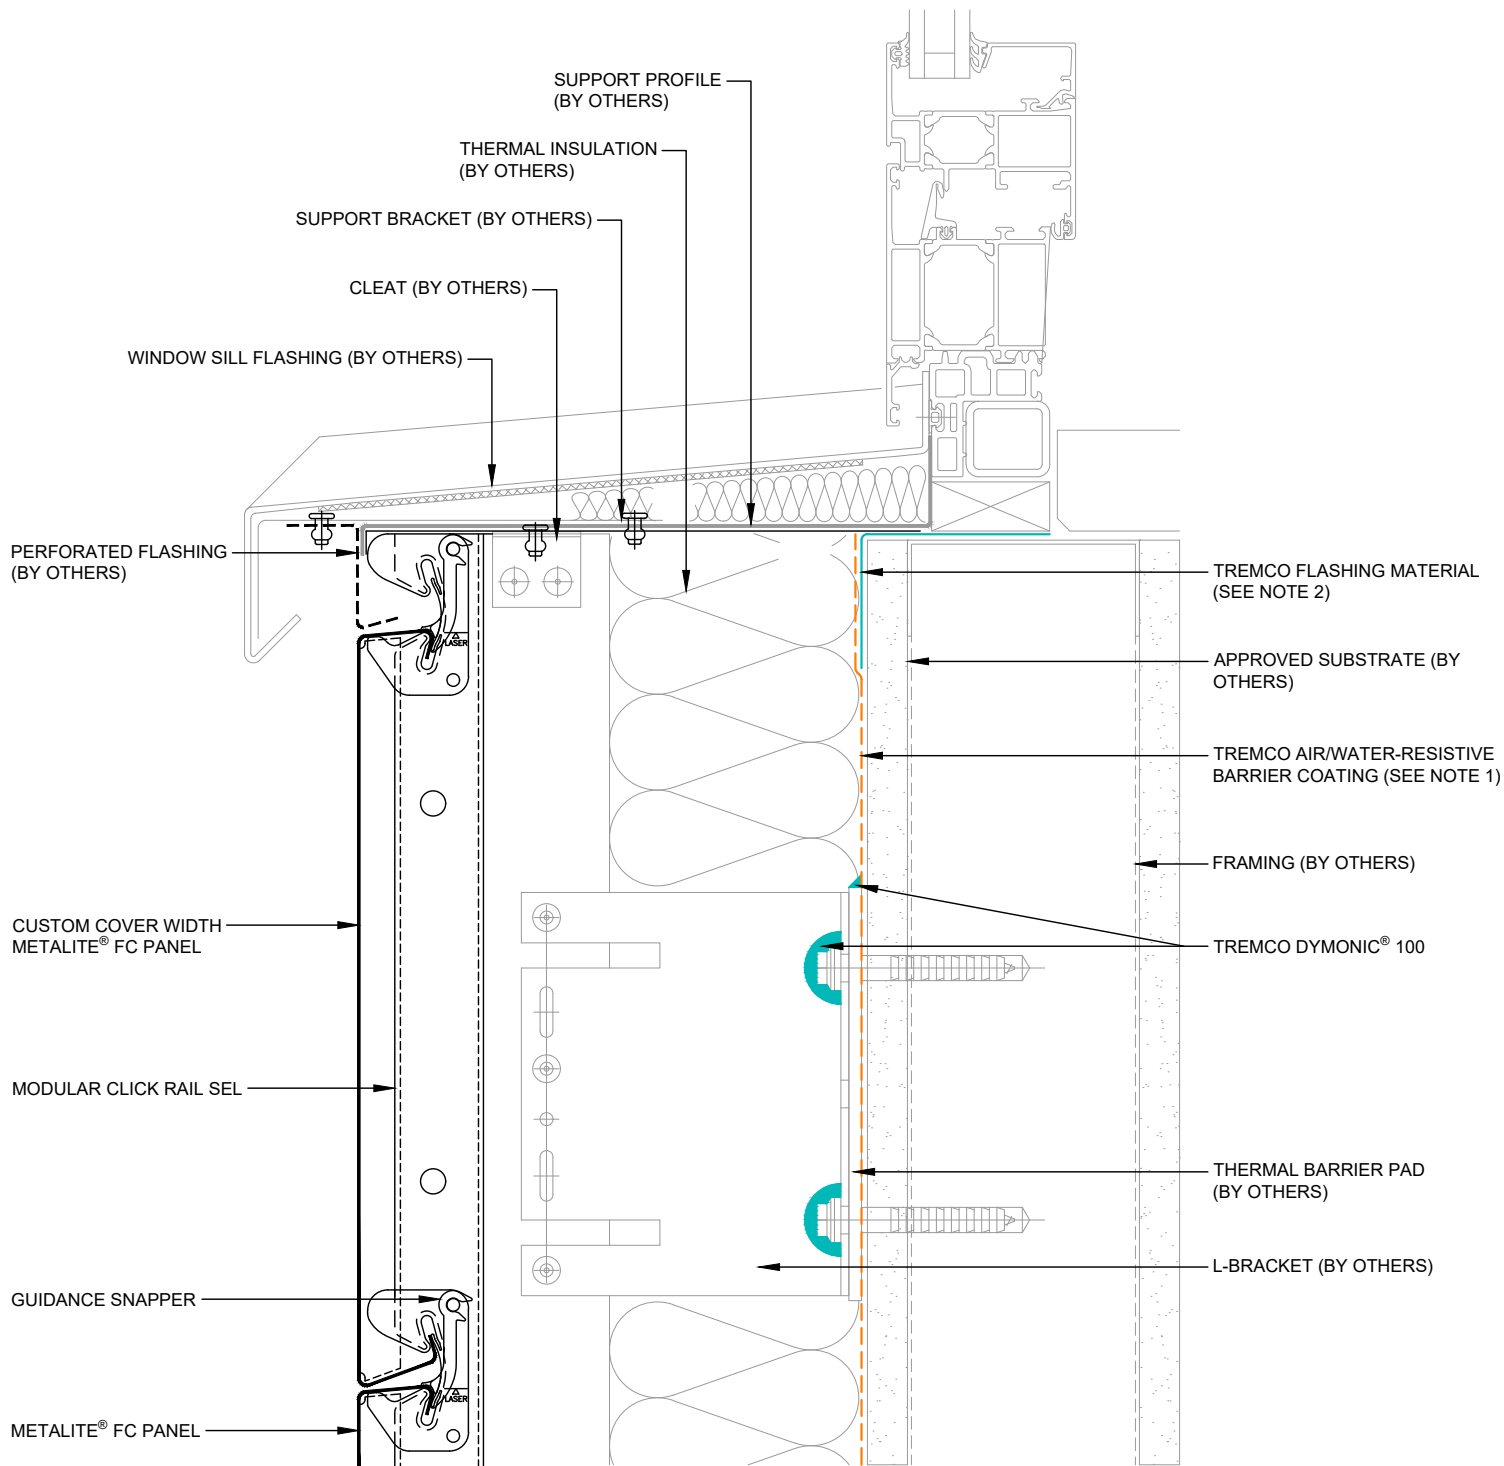

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Fitted Joint - Window Sill

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Scale: 4" = 1'-0"

Revision #: 00

Revised by: NA

Date: 8/14/2026


File Name:

3-D 104



Construction Products Group

www.tremcocpg.com

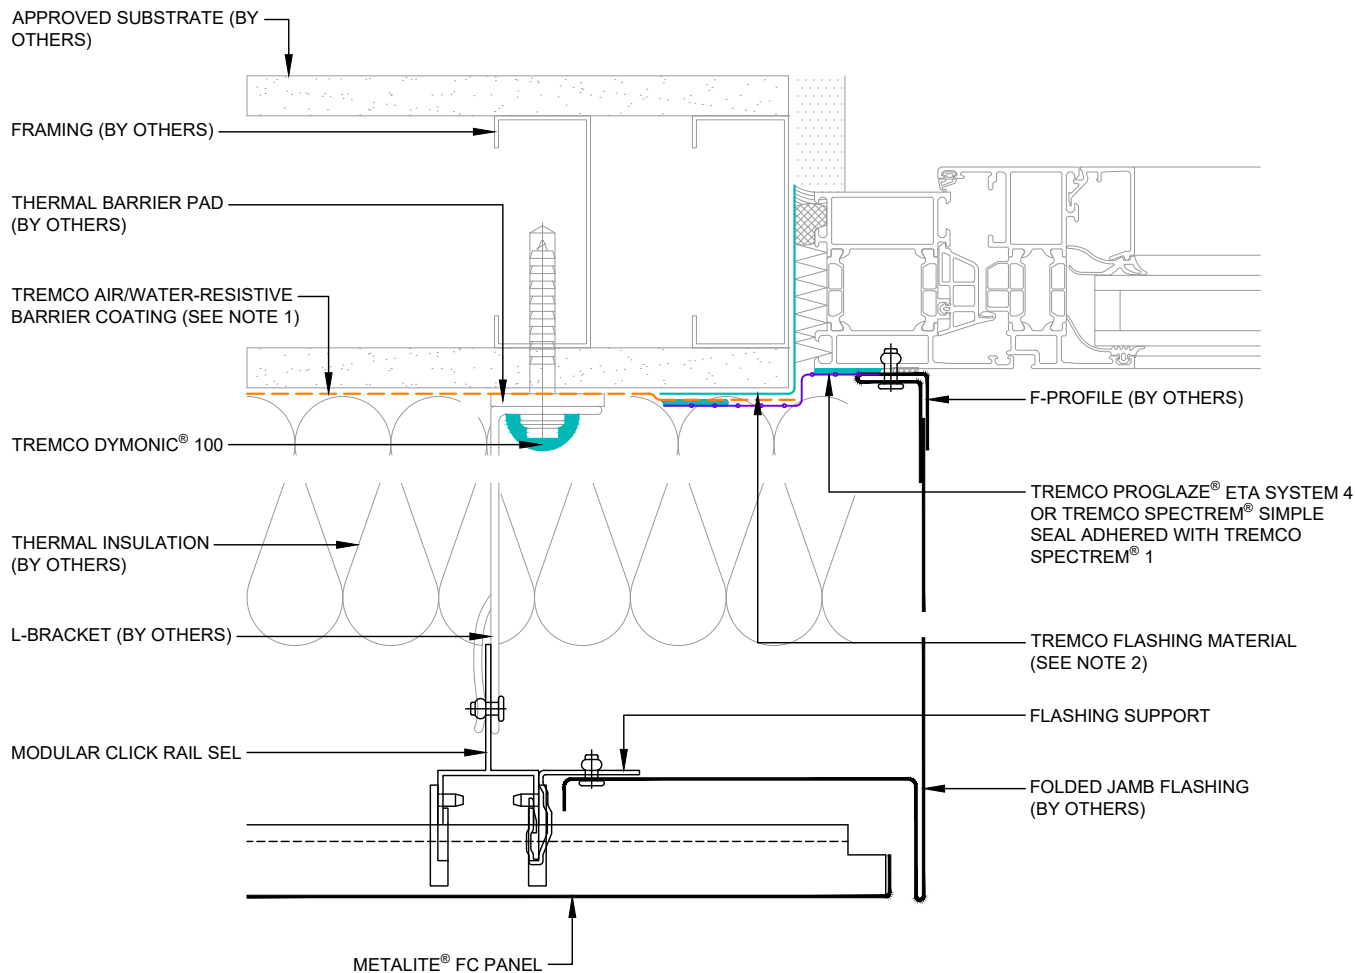

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Fitted Joint - Window Jamb

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Scale: 4" = 1'-0"

Revision #: 00

Revised by: NA

Date: 8/14/2026


File Name:

3-D 105



Construction Products Group

www.tremcocpg.com

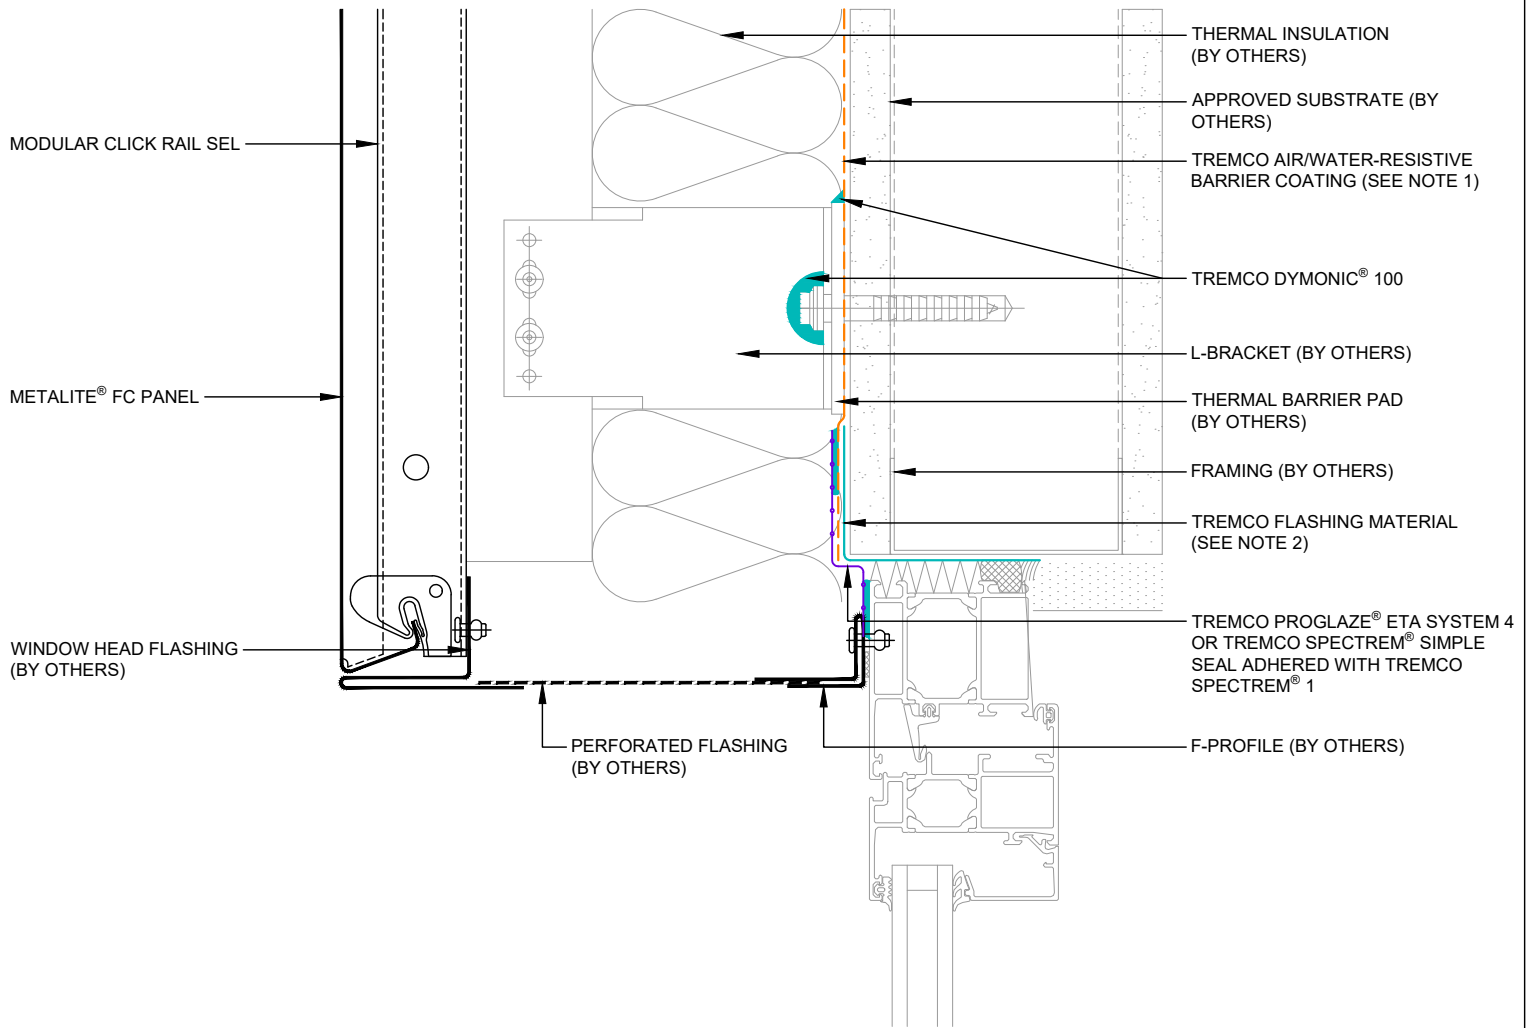

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Fitted Joint - Window Head - Option 1

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Revision #: 00

Revised by: NA

Scale: 4" = 1'-0"

Date: 8/14/2026


www.tremcocpg.com

File Name:

3-D 106



Construction Products Group

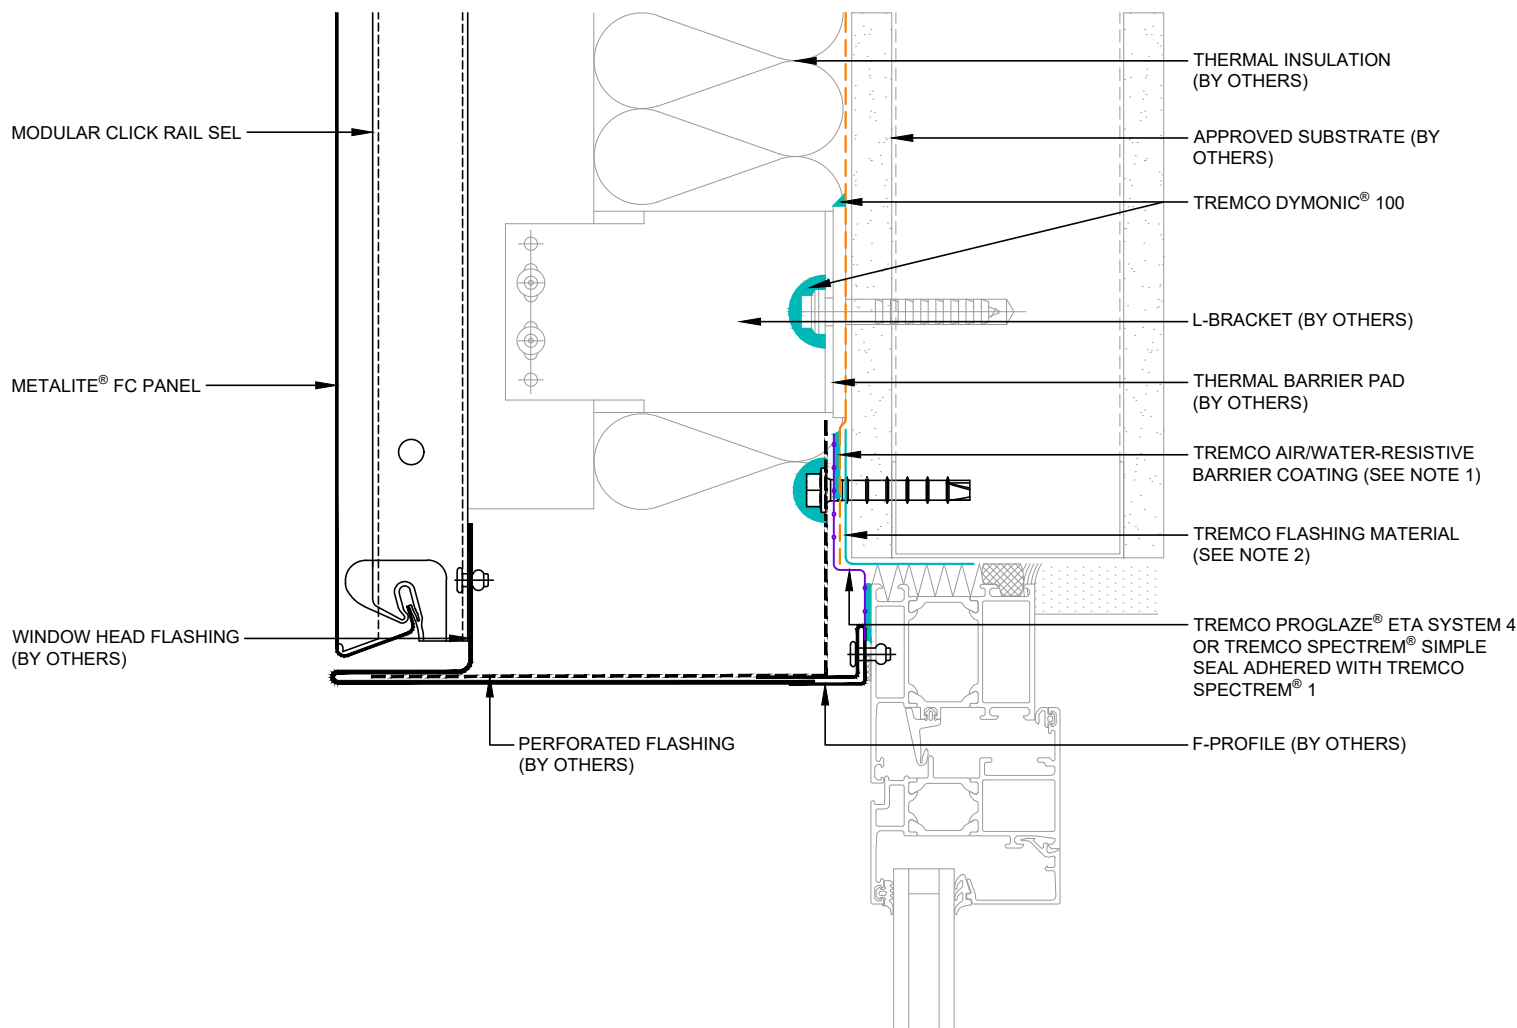

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Fitted Joint - Window Head - Option 2

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Revision #: 00

Revised by: NA

Scale: 4" = 1'-0"

Date: 8/17/2026


File Name:

3-D 106A



Construction Products Group

www.tremcocpg.com

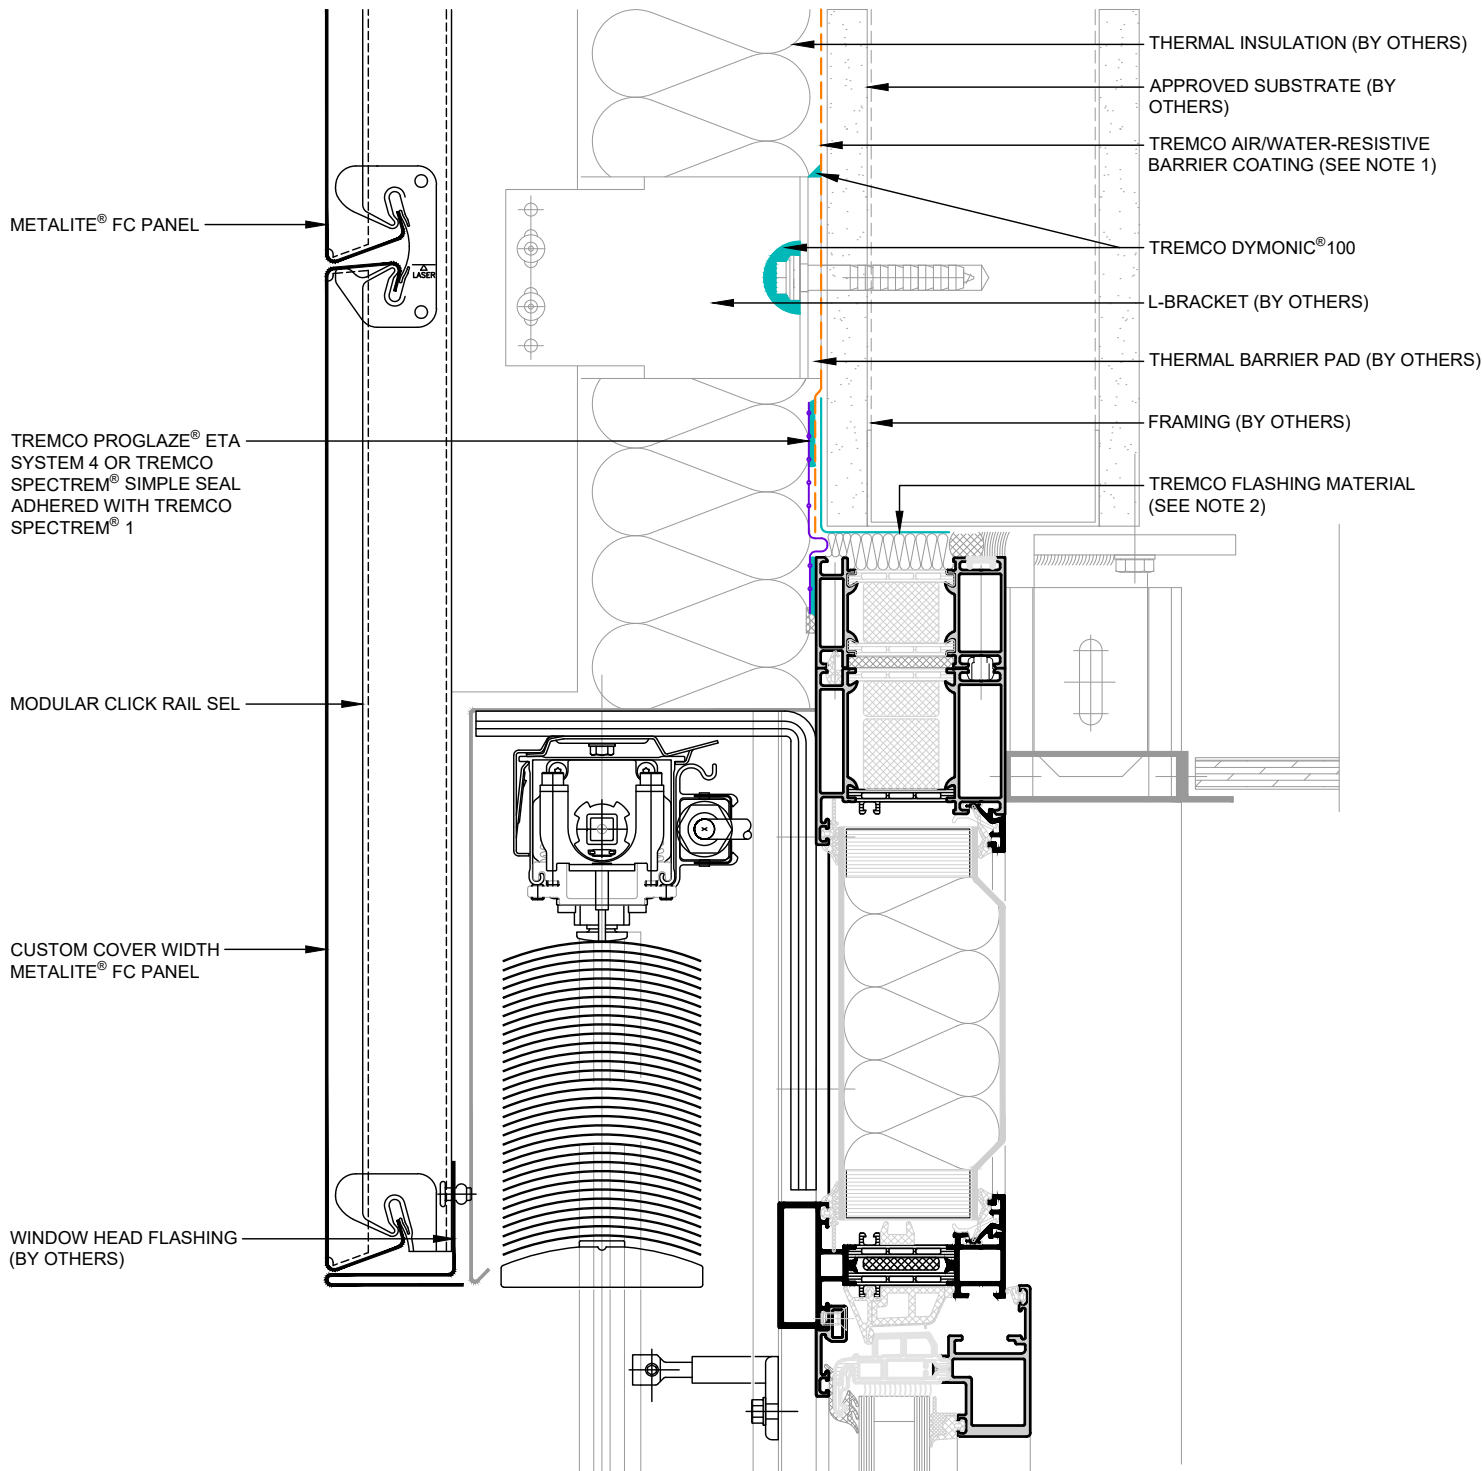

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Fitted Joint - Window Head - Option 3

Drawn by: MSCO

Revision #: 00

Checked by: MD, MW,
DV, AM

Revised by: NA

Scale: 4" = 1'-0"

Date: 8/14/2026


File Name:

3-D 107



Construction Products Group



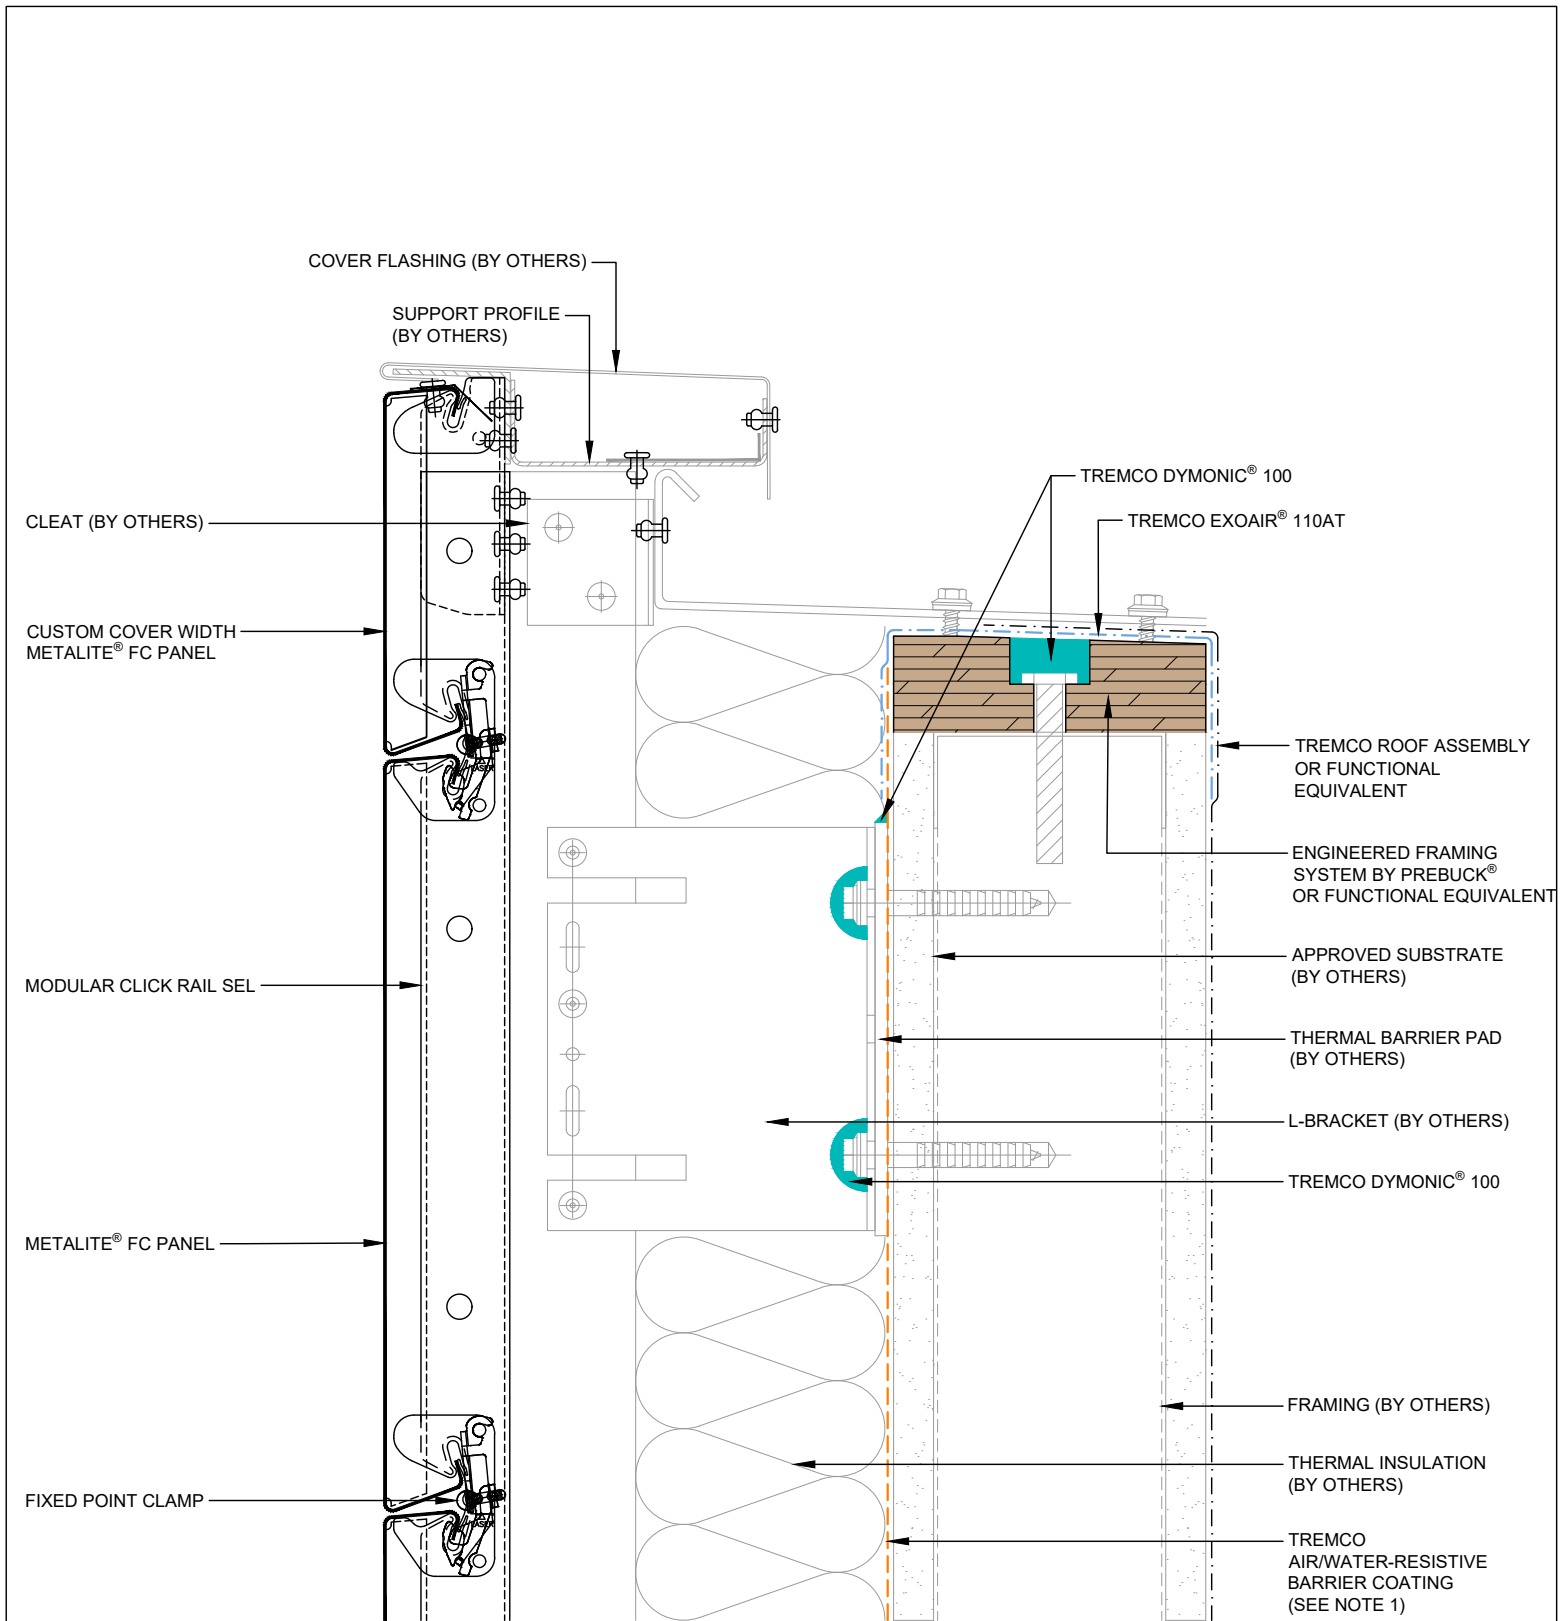

NOTES:

1. TREMCO AIR/WATER-RESISTIVE BARRIER COATING SHALL BE SECUROCK® EXOAIR® 430, EXOAIR® 130, EXOAIR® 230, EXOAIR® 110AT, OR EXOAIR® 210AT. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
2. TREMCO FLASHING MATERIAL SHALL BE DYMONIC® 100, EXOAIR® DUALFLASH®, EXOAIR® 110AT, OR TREMCO® 2011 REINFORCING MESH. REFER TO APPLICATION INSTRUCTIONS FOR SPECIFIC APPLICATION METHODS.
3. FASTENING CONNECTIONS ARE BY OTHERS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Metalite® FC SEL Modular Click Rail with Individual Helping Hands



Dryvit Technical Support: 800-556-7752

Detail: Fitted Joint - Parapet

Drawn by: MSCO

Checked by: MD, MW,
DV, AM

Scale: 4" = 1'-0"

Revision #: 00

Revised by: NA

Date: 8/14/2026

www.tremcocpg.com

File Name:

3-D 109



Construction Products Group