

SECUROCK® EXOAIR® 430

DRYVIT STANDARD PLUS™ REINFORCING MESH EMBEDDED IN DRYVIT GENESIS® BASE COAT

DRYVIT FINISH


FRAMING (BY OTHERS)

2"
[50.8 MM]

DRYVIT GENESIS® ADHESIVE APPLIED IN VERTICAL NOTCHED TROWEL CONFIGURATION OR VERTICAL RIBBONS AS PER APPLICATION INSTRUCTIONS

DRYVIT APPROVED MECHANICAL FASTENER (SEE NOTES 2, 3)

ROCKWOOL FRONTROCK™ MINERAL WOOL INSULATION BOARD

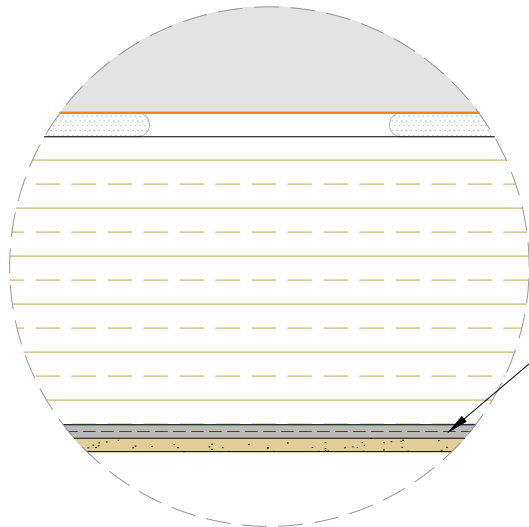

DRYVIT STANDARD PLUS™ REINFORCING MESH EMBEDDED IN DRYVIT GENESIS® BASE COAT

NOTES:

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD PLUS™ MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. ALLOW ADHESIVE TO DRY IN ADVANCE OF INSTALLING FASTENERS. SPOT FASTENER/WASHER WITH DRYVIT GENESIS® BASE COAT. SUPPORT MINERAL WOOL INSULATION BOARD, AS REQUIRED, WHILE ADHESIVE DRIES.
3. REFER TO OMW SE430 4, OMW SE430 5, AND OMW SE430 6 FOR MECHANICAL FASTENER TYPE, LAYOUT, DIMENSIONS, AND WASHER PLATE OPTIONS.

This detail is for general informational purposes only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Outsulation® Mineral Wool Securock® ExoAir® 430 System

<p>SECUROCK EXOAIR® 430 Technical Support: 800-239-2464</p>	Detail: Standard Impact Configuration			File Name:
	Drawn by: HDE	Checked by: CB	Scale: 6" = 1'-0"	OMW SE430 1
<p>Dryvit Technical Support: 800-656-7752</p>	Revision #: 0	Revised by: NA	Date: 1/27/2026	
	www.tremcocpg.com			