




OUTSULATION® PLUS MD WITH FIREBLOCKING

An Exterior Insulation and Finish System
Built with Enhanced Fire Protection for
High-Performance Building Enclosures

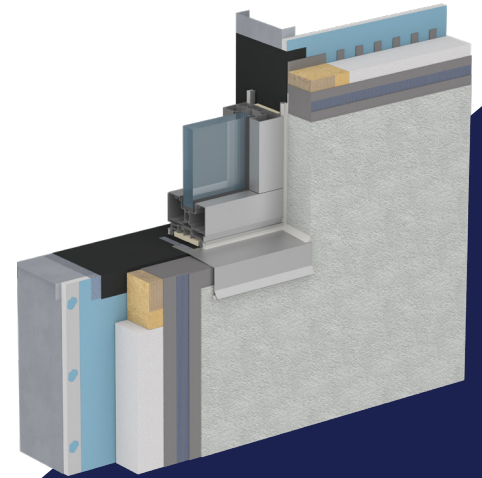

Product Overview

Outsulation Plus® MD with Fireblocking delivers the proven performance of Dryvit's premier exterior insulation and finish system now with an added layer of fire protection: ROCKWOOL Frontrock® mineral wool lamellas around penetrations and floorlines. This system combines a mesh-reinforced base coat, drainage track, high-performance continuous insulation, waterproof flashing, and an efficient moisture drainage system. With a world of color, texture, and specialty finish options, it is the high-performance choice for your next project.

System Components:

- Dryvit/Tremco Flashing
- Pre-Based Starter Board
- Dryvit Adhesive in Vertical Notched Trowel Configuration
- EPS Insulation board with mineral wool lamellas providing fireblocking.
- Reinforcing Mesh Embedded in Base Coat
- Dryvit Texture & Color or Specialty Finish

Features & Benefits



Enhanced ROCKWOOL Fire Protection

Built-in ROCKWOOL Frontrock® mineral wool lamellas around penetrations and floorlines add a critical layer of protection to the wall assembly, helping meet fire safety requirements without compromising system performance.



Maximum Design Freedom

Choose from Dryvit's extensive selection of colors, textures, and finishes trusted by architectural trendsetters for over 50 years to deliver bold, vivid, and fade-resistant results



Enhanced Energy Efficiency

Dryvit's continuous insulation helps lower heating and cooling demands, reducing a building's overall operational costs over its lifetime.



Improved Moisture Drainage

Vertical adhesive beads facilitate efficient moisture drainage and prevent water build-up within the wall assembly.



Tremco CPG Compatibility


As part of Tremco Construction Products Group, Outsulation Plus MD systems offer tested, proven compatibility with Tremco, Willseal, and Nudura products for truly comprehensive building enclosures.

OUTSULATION® PLUS MD WITH FIREBLOCKING

An Exterior Insulation and Finish System
Built with Enhanced Fire Protection for
High-Performance Building Enclosures

Mineral Wool Lamella Sizes and R-Values

THICKNESS (IN)	R-VALUE (75°F)	TOTAL PCS	LINEAL FT PER PALLET
2"	6.4	288	1152
2.5"	8	216	864
3"	9.6	192	768
3.5"	11.2	156	624
4"	12.8	144	576
4.5"	14.4	120	480
5"	16	108	432
5.5"	17.6	96	384
6"	19.2	96	384
6.5"	20.8	84	336
7"	22.4	72	288
7.5"	24	72	288
8"	25.6	72	288
8.5"	27.2	60	240
9"	28.8	60	240
9.5"	30.4	60	240
10"	32	48	192
10.5"	33.6	48	192
11"	35.2	48	192
11.5"	36.8	48	192

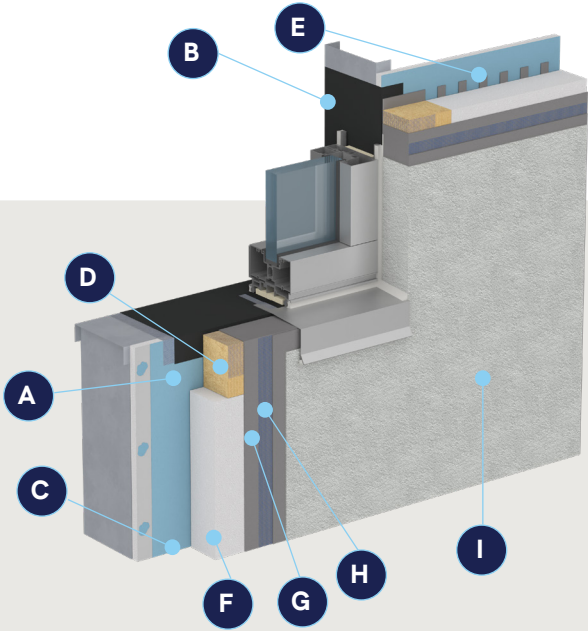

- A. Air/Water-Resistive Barrier
- B. Flashing System
- C. Drainage
- D. Fire Blocking Lamella
- E. Dryvit Adhesive in Vertical Notched Configuration
- F. EPS Insulation Board
- G. Base Coat
- H. Reinforcing Mesh
- I. Dryvit Finish